


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
Rock Truck
Machine Id
HT2607
Component
Transfer Gearbox
Fluid
NOT GIVEN (18 LTR)

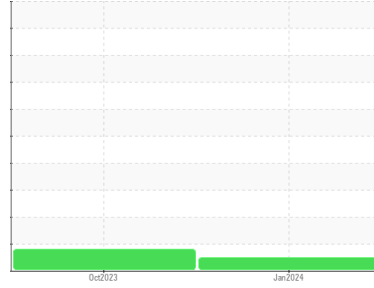

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0050978	PC0066719	---
Sample Date	Client Info			27 Jan 2024	07 Oct 2023	---
Machine Age	hrs	Client Info		42614	40917	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---


CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	3	2	---
Chromium	ppm	ASTM D5185(m)	>10	0	0	---
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	▲ 13	---
Aluminum	ppm	ASTM D5185(m)		1	<1	---
Lead	ppm	ASTM D5185(m)		2	5	---
Copper	ppm	ASTM D5185(m)		5	8	---
Tin	ppm	ASTM D5185(m)		0	0	---
Antimony	ppm	ASTM D5185(m)	>5	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		63	5	---
Barium	ppm	ASTM D5185(m)		0	<1	---
Molybdenum	ppm	ASTM D5185(m)		<1	3	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)		27	53	---
Calcium	ppm	ASTM D5185(m)		3037	2254	---
Phosphorus	ppm	ASTM D5185(m)		1018	904	---
Zinc	ppm	ASTM D5185(m)		1259	1049	---
Sulfur	ppm	ASTM D5185(m)		3026	2563	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		6	2	---
Sodium	ppm	ASTM D5185(m)		<1	3	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---

OIL ANALYSIS REPORT

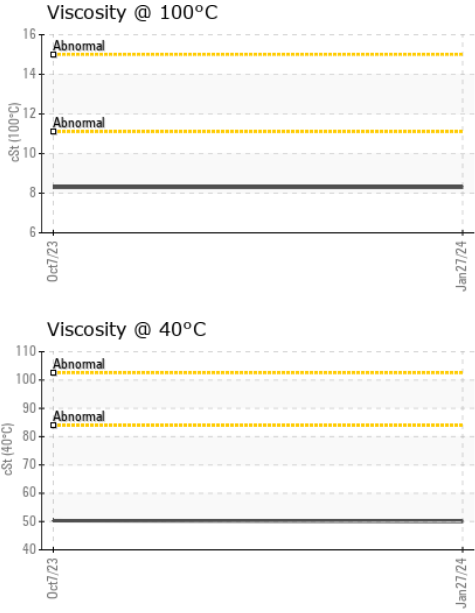


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	50.0	50.3	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.3	8.3	---
Viscosity Index (VI)	Scale	ASTM D2270*	140	138	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					no image
Bottom					no image

GRAPHS

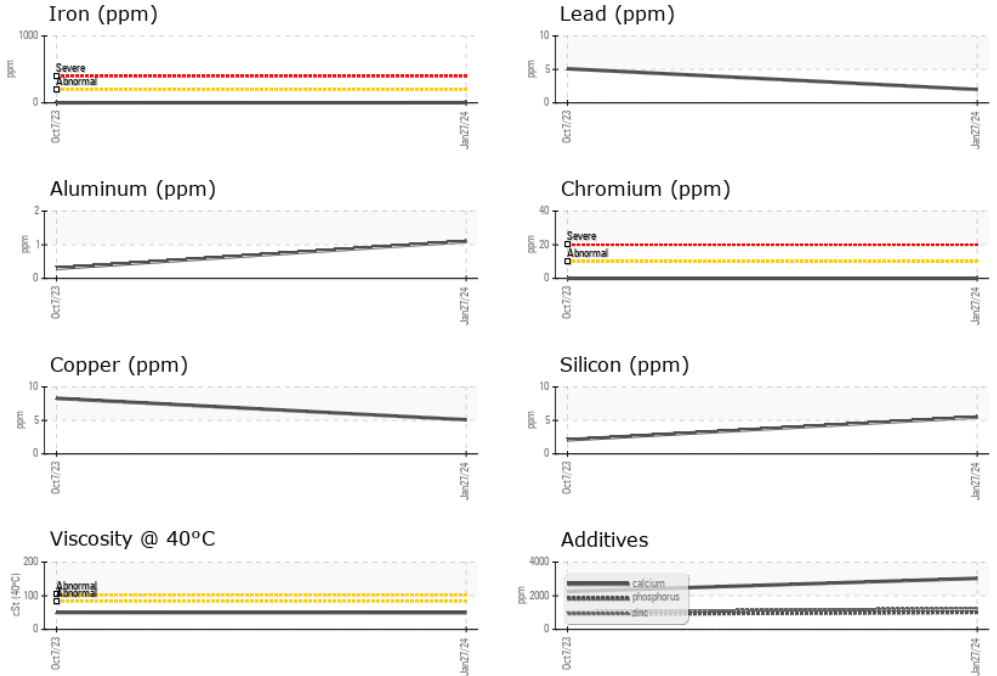

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0050978 **Received** : 09 Feb 2024
Lab Number : **02614449** **Tested** : 09 Feb 2024
Unique Number : 5723544 **Diagnosed** : 09 Feb 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: KV100, VI)

Lakeshore Gold Timmins West

Timmins, ON
 CA
 Contact: Dale Arseneau
 darseneau@ca.panamericansilver.com
 T: (705)269-4344
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.