



OIL ANALYSIS REPORT

Sample Rating Trend


ISO



Machine Id
813106

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 32 (--- LTR)

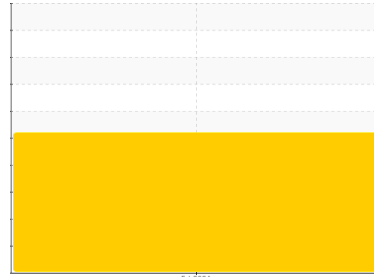

DIAGNOSIS

Recommendation

Nous vous recommandons de vérifier tous les endroits par lesquels des contaminants peuvent pénétrer dans le système. Nous vous recommandons de remplacer le filtre et d'utiliser un système de filtrage hors-ligne afin d'améliorer la propreté du fluide. Le reniflard d'air doit être réparé. S'il n'est pas classé, nous vous recommandons de le remplacer par un reniflard à air adapté au micron et / ou au dessicant. Si évalué, nous vous recommandons de réparer / remplacer le reniflard. Échantillonner de nouveau dans 30 à 45 jours afin de contrôler la situation. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indique que ce fluide est du (GENERIC) AW HYDRAULIC OIL ISO 32. Veuillez confirmer.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il y a une quantité élevée de matières particulaires (2 à 100 µm de taille) présente dans l'huile.

Fluid Condition

L'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0079082	---	---
Sample Date	Client Info		19 Feb 2024	---	---
Machine Age	kms	Client Info	39308	---	---
Oil Age	kms	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >40	4	---	---
Chromium	ppm	ASTM D5185(m) >5	4	---	---
Nickel	ppm	ASTM D5185(m) >2	<1	---	---
Titanium	ppm	ASTM D5185(m) >2	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >8	1	---	---
Lead	ppm	ASTM D5185(m) >5	<1	---	---
Copper	ppm	ASTM D5185(m) >20	<1	---	---
Tin	ppm	ASTM D5185(m) >2	0	---	---
Antimony	ppm	ASTM D5185(m) >2	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	0	---	---
Barium	ppm	ASTM D5185(m) 5	0	---	---
Molybdenum	ppm	ASTM D5185(m) 5	0	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m) 25	1	---	---
Calcium	ppm	ASTM D5185(m) 200	52	---	---
Phosphorus	ppm	ASTM D5185(m) 300	330	---	---
Zinc	ppm	ASTM D5185(m) 370	414	---	---
Sulfur	ppm	ASTM D5185(m) 2500	776	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	2	---	---
Sodium	ppm	ASTM D5185(m)	3	---	---
Potassium	ppm	ASTM D5185(m) >20	3	---	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	41639	---	---
Particles >6µm	ASTM D7647	>1300	12016	---	---
Particles >14µm	ASTM D7647	>160	1008	---	---
Particles >21µm	ASTM D7647	>40	257	---	---
Particles >38µm	ASTM D7647	>10	35	---	---
Particles >71µm	ASTM D7647	>3	8	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	23/21/17	---	---



OIL ANALYSIS REPORT

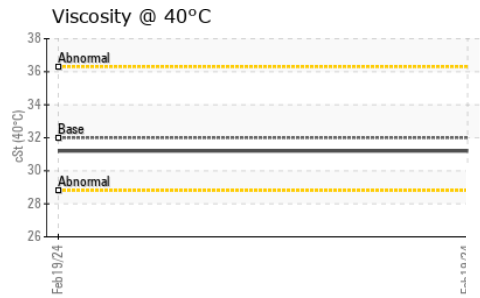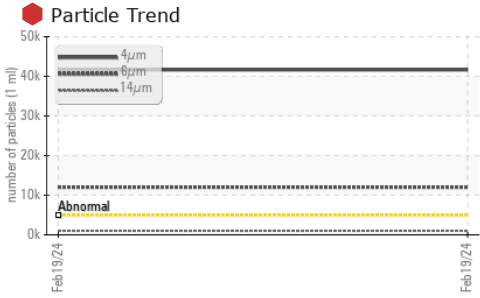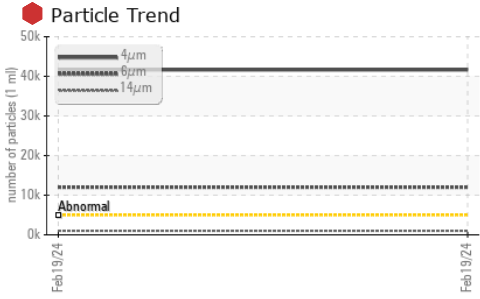





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	LIGHT	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	32	31.2	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

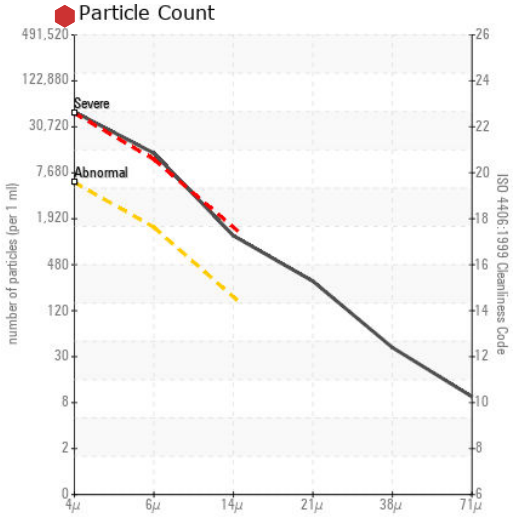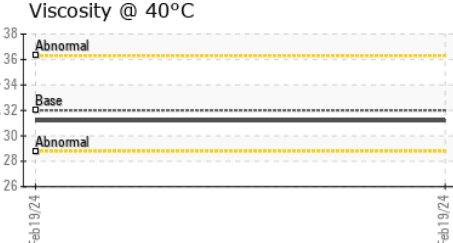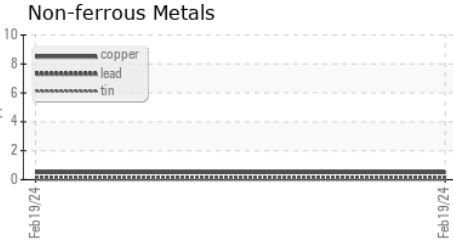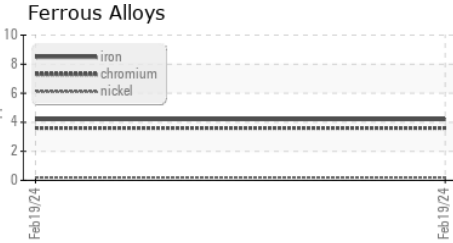

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0079082 **Received** : 21 Feb 2024
Lab Number : 02617130 **Tested** : 22 Feb 2024
Unique Number : 5734240 **Diagnosed** : 22 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

Matrec - 791 - Rimouski
 350 Avenue de L'Industrie
 Rimouski, QC
 CA G5M 1W4
 Contact: Vincent Maltais
 info@foretsstar.com
 T: 4(18)388-2626
 F: (418)388-2038

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.