




OIL ANALYSIS REPORT

Sample Rating Trend

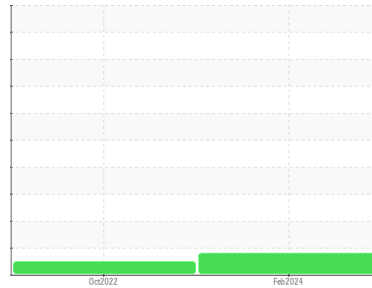

ISO



Machine Id
711026
 Component
Hydraulic System
 Fluid
PETRO CANADA HYDREX AW 32 (--- GAL)

DIAGNOSIS

Recommendation

Nous avons pris note que le filtre a été remplacé au moment de l'échantillonnage. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il y a une quantité modérée de particules (de 4 à 14 microns) dans l'huile.

Fluid Condition

L'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0114906	GFL0055277	---
Sample Date	Client Info		26 Feb 2024	17 Oct 2022	---
Machine Age	hrs	Client Info	5986	2835	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	11	23	---
Chromium	ppm	ASTM D5185(m)	>10	4	0	---
Nickel	ppm	ASTM D5185(m)	>4	0	0	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>5	2	<1	---
Lead	ppm	ASTM D5185(m)	>4	<1	<1	---
Copper	ppm	ASTM D5185(m)	>15	4	2	---
Tin	ppm	ASTM D5185(m)	>4	0	0	---
Antimony	ppm	ASTM D5185(m)		0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<1	<1	---
Barium	ppm	ASTM D5185(m)	0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	0	<1	0	---
Manganese	ppm	ASTM D5185(m)	0	0	<1	---
Magnesium	ppm	ASTM D5185(m)	0	20	<1	---
Calcium	ppm	ASTM D5185(m)	50	81	71	---
Phosphorus	ppm	ASTM D5185(m)	330	366	367	---
Zinc	ppm	ASTM D5185(m)	430	449	422	---
Sulfur	ppm	ASTM D5185(m)	760	916	773	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	4	3	---
Sodium	ppm	ASTM D5185(m)		10	3	---
Potassium	ppm	ASTM D5185(m)	>20	2	3	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 20269	1672	---
Particles >6µm	ASTM D7647	>1300	628	397	---
Particles >14µm	ASTM D7647	>160	36	21	---
Particles >21µm	ASTM D7647	>40	12	5	---
Particles >38µm	ASTM D7647	>10	2	0	---
Particles >71µm	ASTM D7647	>3	1	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/16/12	18/16/12	---




OIL ANALYSIS REPORT

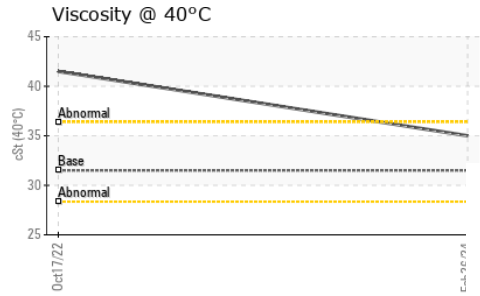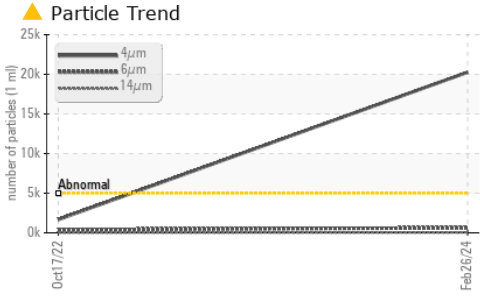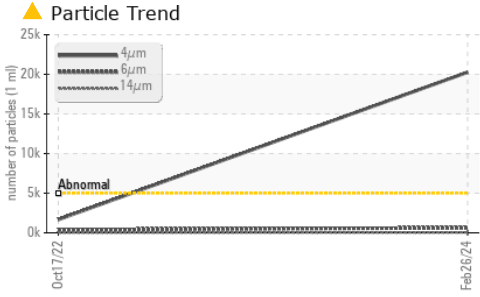





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	VLITE
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	31.5	35.0	41.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

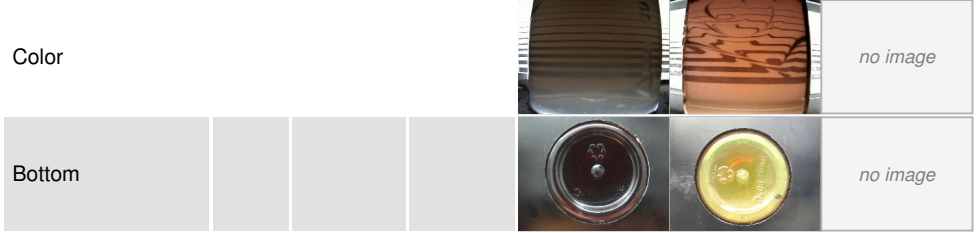

GRAPHS

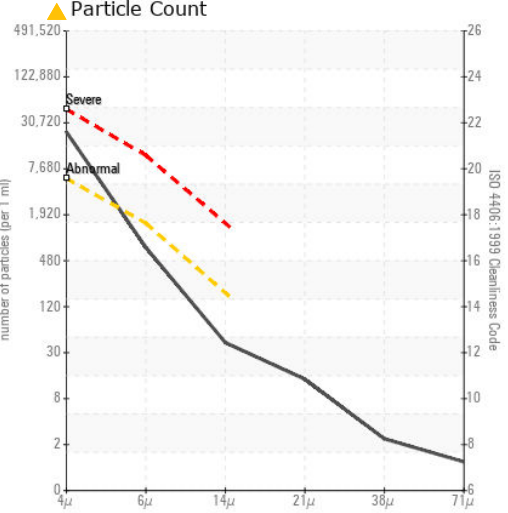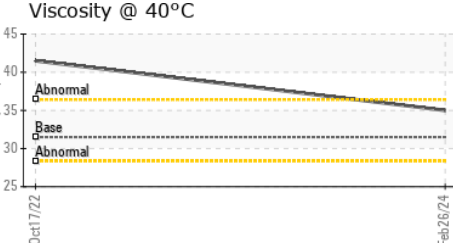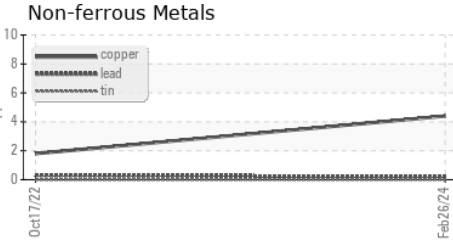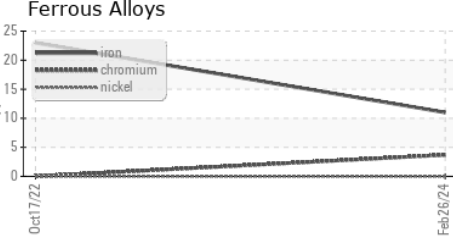

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 780 - GMA - ICI - Solid Waste**
Sample No. : GFL0114906 **Received** : 07 Mar 2024 4365 boul. St-Elzear Ouest,
Lab Number : 02620599 **Tested** : 08 Mar 2024 Laval, QC
Unique Number : 5737709 **Diagnosed** : 08 Mar 2024 - Wes Davis CA H7P 4J3
Test Package : MOB 1 (Additional Tests: PrtCount) Contact: Pieces Laval
 To discuss this sample report, contact Customer Service at 1-800-268-2131. pieces.laval@gflenv.com
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T: (450)687-3838
 Validity of results and interpretation are based on the sample and information as supplied. F: