




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

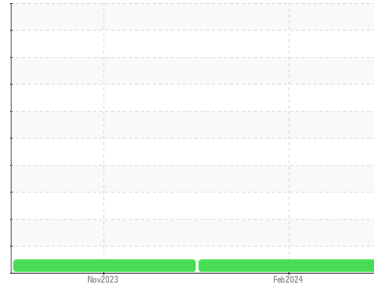

Machine Id
MACK 912084
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0082094	GFL0096336	---
Sample Date	Client Info		13 Feb 2024	03 Nov 2023	---
Machine Age	hrs	Client Info	5040	64614	---
Oil Age	hrs	Client Info	600	1200	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	11	10	---
Chromium	ppm	ASTM D5185(m) >20	<1	<1	---
Nickel	ppm	ASTM D5185(m) >5	<1	<1	---
Titanium	ppm	ASTM D5185(m) >2	0	0	---
Silver	ppm	ASTM D5185(m) >2	0	<1	---
Aluminum	ppm	ASTM D5185(m) >20	2	2	---
Lead	ppm	ASTM D5185(m) >40	<1	<1	---
Copper	ppm	ASTM D5185(m) >330	1	2	---
Tin	ppm	ASTM D5185(m) >15	<1	<1	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 1	5	6	---
Barium	ppm	ASTM D5185(m) 1	0	<1	---
Molybdenum	ppm	ASTM D5185(m) 60	61	62	---
Manganese	ppm	ASTM D5185(m) 1	0	0	---
Magnesium	ppm	ASTM D5185(m) 1010	952	964	---
Calcium	ppm	ASTM D5185(m) 1070	1057	1071	---
Phosphorus	ppm	ASTM D5185(m) 1150	979	947	---
Zinc	ppm	ASTM D5185(m) 1270	1173	1170	---
Sulfur	ppm	ASTM D5185(m) 2060	2571	2398	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	2	3	---
Sodium	ppm	ASTM D5185(m)	1	2	---
Potassium	ppm	ASTM D5185(m) >20	3	0	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0.5	0.4	---
Nitration	Abs/cm	ASTM D7624* >20	8.5	7.6	---
Sulfation	Abs./1mm	ASTM D7415* >30	19.5	19.5	---



OIL ANALYSIS REPORT

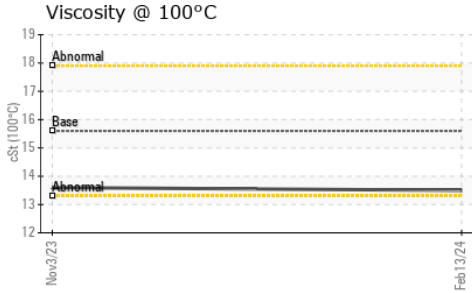

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.3	14.6









VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*	NEG	NEG	---

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	13.5	13.6

GRAPHS

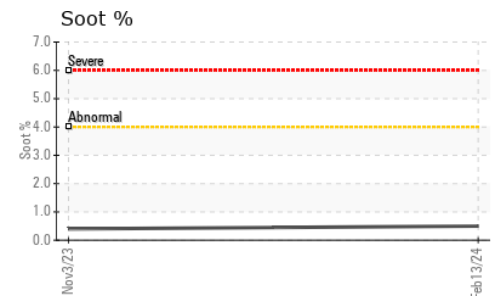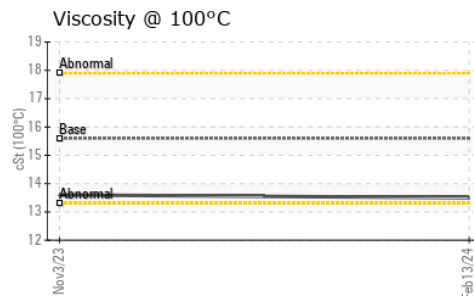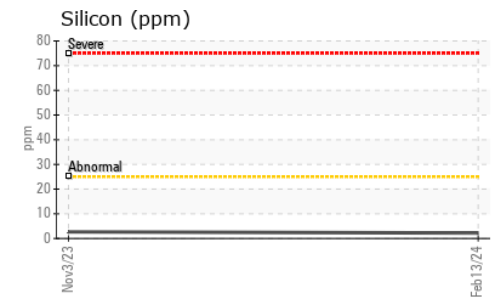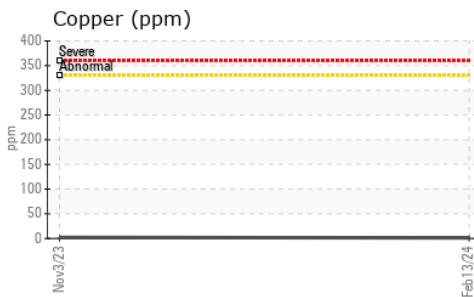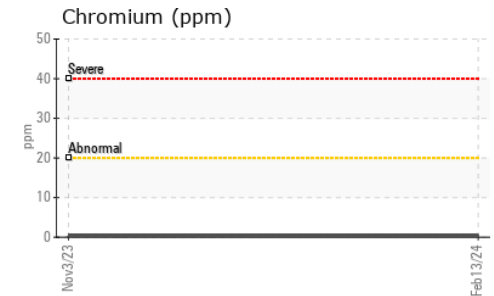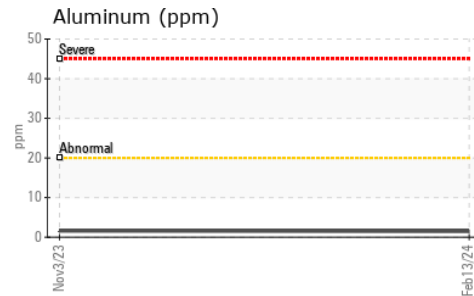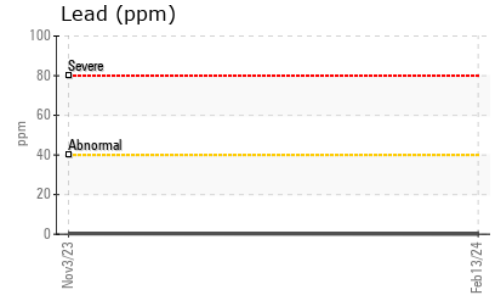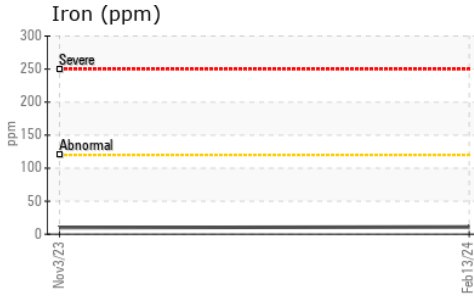

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0082094 **Received** : 13 Mar 2024
Lab Number : 02621673 **Tested** : 13 Mar 2024
Unique Number : 5746792 **Diagnosed** : 13 Mar 2024 - Wes Davis
Test Package : MOB 1

GFL Environmental - 527
 740 Pine Street South
 Timmins, ON
 CA P4N 8S9
 Contact: Martin St-Pierre
 martinstpierre@gflenv.com
 T: (705)264-8700
 F: (705)264-8701

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.