




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(L913868)**  
Machine Id  
**828118**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA HYDREX MV 32 (205 LTR)**

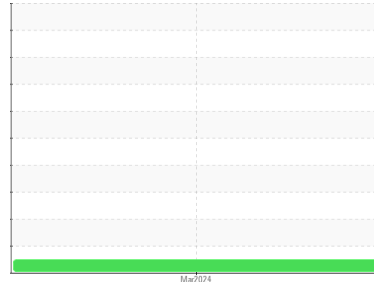

## DIAGNOSIS

### Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

### Wear

Les taux d'usure de tous les composants sont normaux.

### Contamination

La propreté du système est acceptable pour votre objectif de propreté ISO 4406. La propreté du système et du fluide est acceptable.

### Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0081633</b>	---	---
Sample Date	Client Info		<b>08 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>9652</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >40	<b>4</b>	---	---
Chromium	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >8	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >2	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m) >2	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>2</b>	---	---
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 0	<b>1</b>	---	---
Manganese	ppm	ASTM D5185(m) 1	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m) 0	<b>48</b>	---	---
Calcium	ppm	ASTM D5185(m) 50	<b>90</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 330	<b>357</b>	---	---
Zinc	ppm	ASTM D5185(m) 430	<b>428</b>	---	---
Sulfur	ppm	ASTM D5185(m) 760	<b>912</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>2</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	---	---

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>1542</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>269</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>17</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>4</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>18/15/11</b>	---	---



# OIL ANALYSIS REPORT

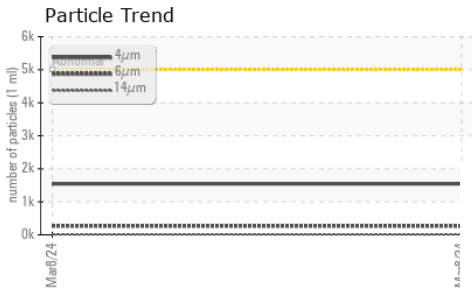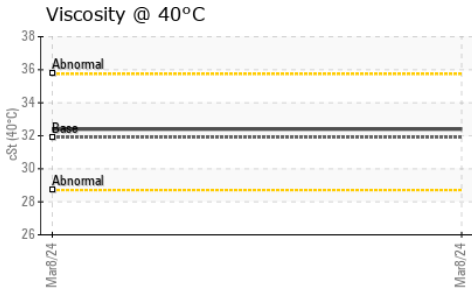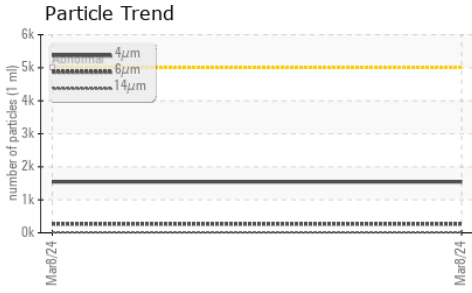




VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	<b>32.4</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

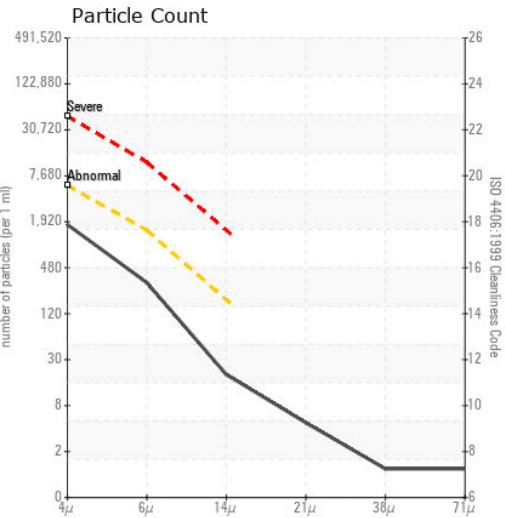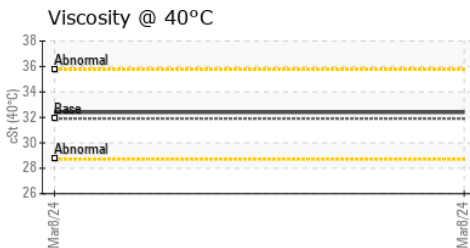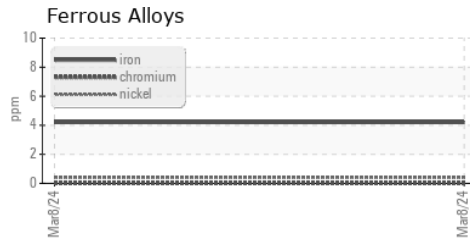

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0081633      **Received** : 14 Mar 2024  
**Lab Number** : 02622046      **Tested** : 15 Mar 2024  
**Unique Number** : 5747165      **Diagnosed** : 15 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: PrtCount )

**GFL Environmental - 774**  
 169 Route 117  
 Mont-Tremblant, QC  
 CA J8E 1A1  
 Contact: Stephane Filteau  
 sfilteau@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.