


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

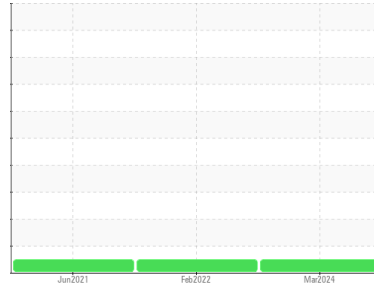

Machine Id  
**OR1271**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON UHP 5W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0082690</b>	PC0059533	PC0047961
Sample Date	Client Info			<b>19 Mar 2024</b>	03 Feb 2022	28 Jun 2021
Machine Age	hrs	Client Info		<b>2825</b>	0	1118
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>35</b>	26	17
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>7</b>	4	3
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	1	1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	65	<b>41</b>	47	50
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	65	<b>62</b>	56	56
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1160	<b>1075</b>	1144	1147
Calcium	ppm	ASTM D5185(m)	820	<b>801</b>	846	823
Phosphorus	ppm	ASTM D5185(m)	1160	<b>915</b>	1093	1094
Zinc	ppm	ASTM D5185(m)	1260	<b>1151</b>	1230	1247
Sulfur	ppm	ASTM D5185(m)	3000	<b>2729</b>	2874	2924
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	4	4
Sodium	ppm	ASTM D5185(m)		<b>4</b>	5	4
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.2</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.1</b>	9.5	7.9
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>20.4</b>	20.7	19.4

# OIL ANALYSIS REPORT







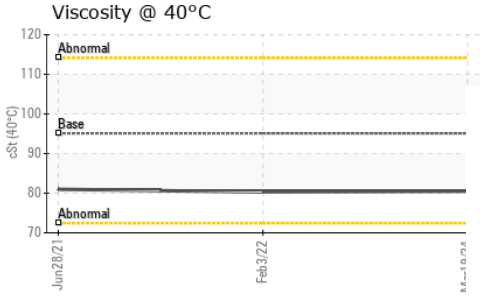
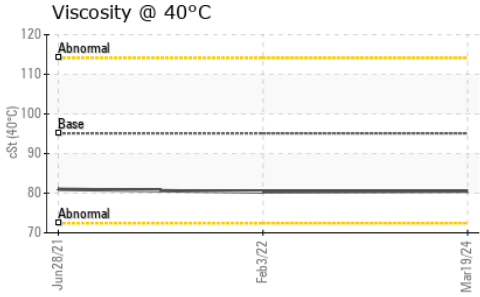


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>19.2</b>	19.0	17.9

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	<b>80.5</b>	80.3	81.0
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	<b>13.2</b>	12.9	13.0
Viscosity Index (VI)	Scale	ASTM D2270*	169	<b>166</b>	161	161

## GRAPHS

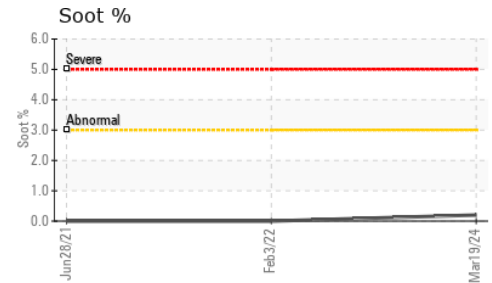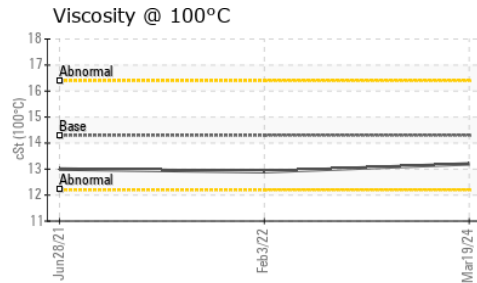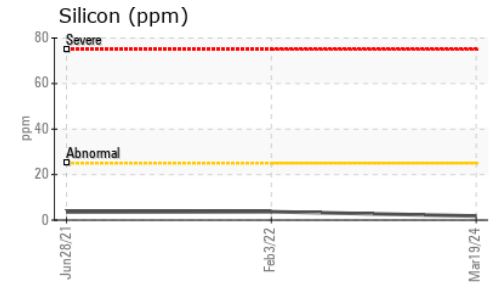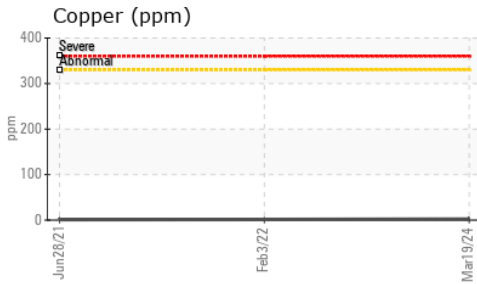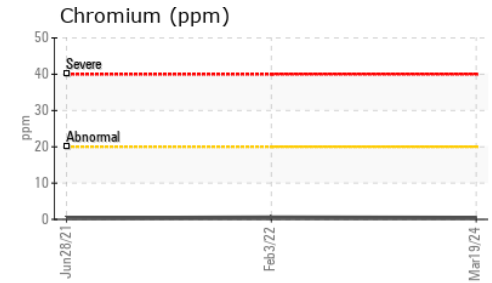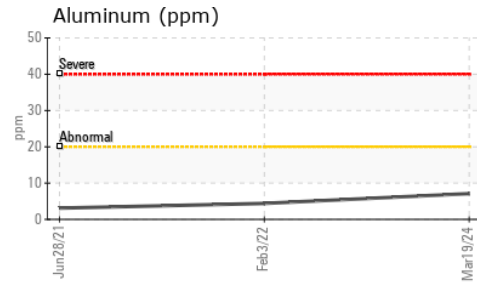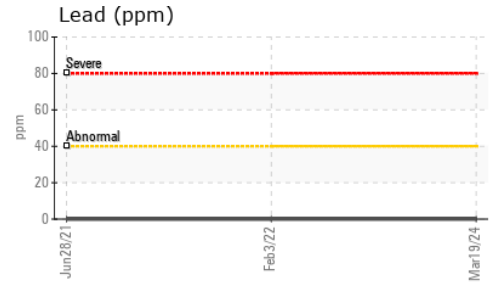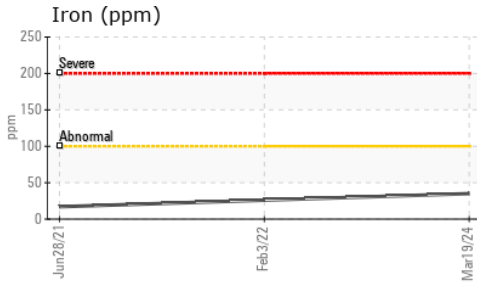

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0082690 **Received** : 27 Mar 2024  
**Lab Number** : **02624867** **Tested** : 27 Mar 2024  
**Unique Number** : 5749986 **Diagnosed** : 27 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

Green Infrastructure and Partners Inc (GPI) - 286 - Shoring & Foundations  
 151 Ram Forest Rd,  
 Stouffville, ON  
 CA L4A 2G8  
 Contact: Shannon Abbott  
 sabbott@gipi.com  
 T: (905)750-5900  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.