




Machine Id
COMP 2 (S/N 5507711)

Component
2 Compressor

Fluid
PETRO CANADA SYNDURO SHB ISO 68 (50 mL)

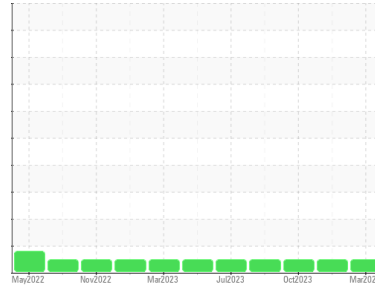

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The water content is negligible. There is no indication of any contamination in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0080815	PC0080814	PC0080820
Sample Date	Client Info	17 Mar 2024	05 Jan 2024	31 Oct 2023
Machine Age	hrs	36905	35495	34403
Oil Age	hrs	5125	241	1552
Oil Changed	Client Info	Changed	N/A	Changed
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	0	0	0
Iron	ppm	ASTM D5185(m) >50	0	<1
Chromium	ppm	ASTM D5185(m) >10	0	0
Nickel	ppm	ASTM D5185(m)	0	0
Titanium	ppm	ASTM D5185(m)	0	0
Silver	ppm	ASTM D5185(m)	0	<1
Aluminum	ppm	ASTM D5185(m) >25	0	<1
Lead	ppm	ASTM D5185(m) >25	0	0
Copper	ppm	ASTM D5185(m) >50	<1	<1
Tin	ppm	ASTM D5185(m) >15	0	0
Antimony	ppm	ASTM D5185(m)	0	0
Vanadium	ppm	ASTM D5185(m)	0	0
Beryllium	ppm	ASTM D5185(m)	0	0
Cadmium	ppm	ASTM D5185(m)	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<1	<1
Barium	ppm	ASTM D5185(m) 5.0	<1	1
Molybdenum	ppm	ASTM D5185(m) 0	0	0
Manganese	ppm	ASTM D5185(m)	0	0
Magnesium	ppm	ASTM D5185(m) 5.0	0	<1
Calcium	ppm	ASTM D5185(m) 5.0	0	<1
Phosphorus	ppm	ASTM D5185(m) 100	25	41
Zinc	ppm	ASTM D5185(m) 5.0	2	<1
Sulfur	ppm	ASTM D5185(m) 1900	1385	1024
Lithium	ppm	ASTM D5185(m)	<1	<1






CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	0	0
Sodium	ppm	ASTM D5185(m)	0	0
Potassium	ppm	ASTM D5185(m) >20	<1	1
Water	%	ASTM D6304* >0.1	0.003	0.004
ppm Water	ppm	ASTM D6304* >1000	35	49

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.3	0.16	0.28

OIL ANALYSIS REPORT

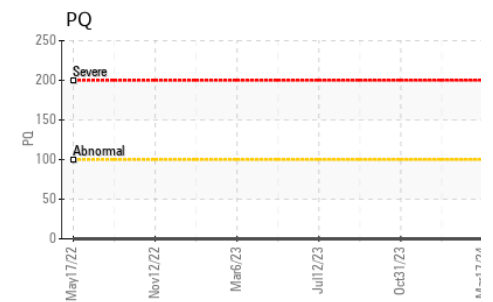
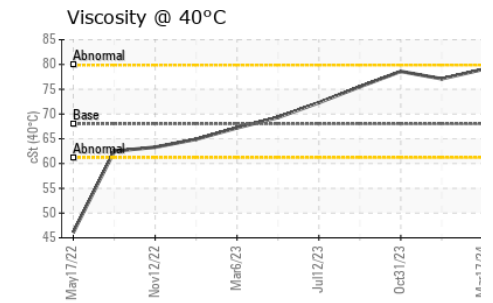
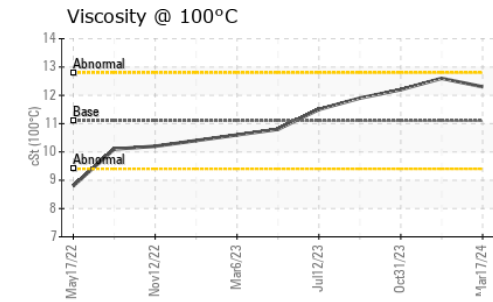
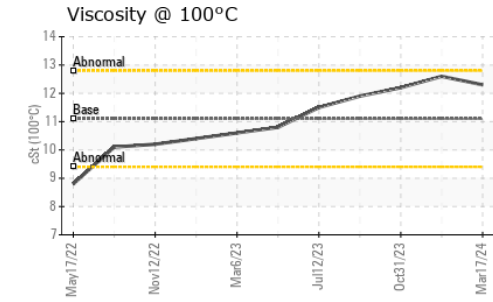
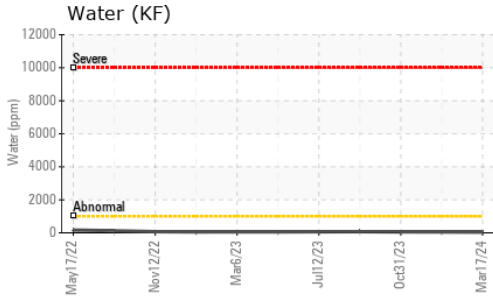


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68.0	77.1	78.6
Visc @ 100°C	cSt	ASTM D7279(m)	11.1	12.6	12.2
Viscosity Index (VI)	Scale	ASTM D2270*	155	162	151

PARAMETER	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

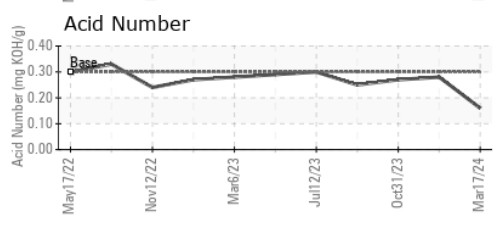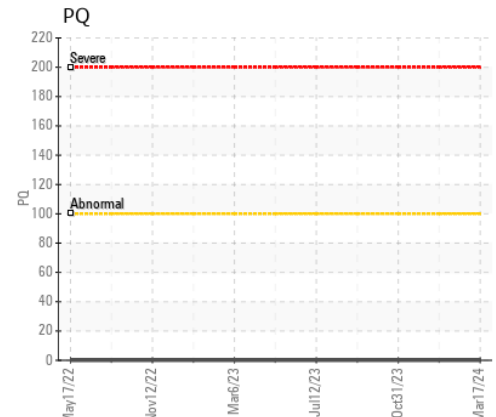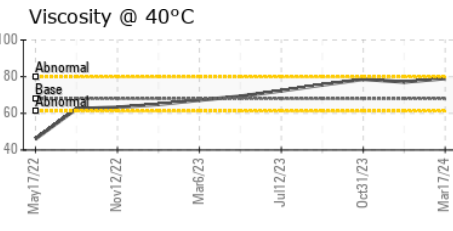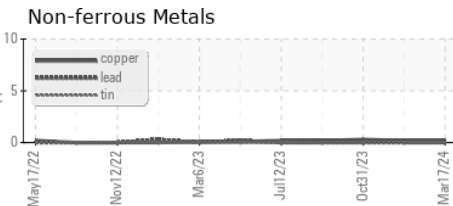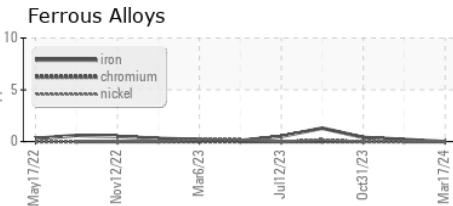

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0080815
Lab Number : 02625245
Unique Number : 5750364
Test Package : IND 2 (Additional Tests: KF, KV100, VI)
Received : 28 Mar 2024
Tested : 28 Mar 2024
Diagnosed : 28 Mar 2024 - Wes Davis

Powercor Manufacturing - Linamar
 545 Elmira Road
 Guelph, ON
 CA N1K 1C2
 Contact: Gina Yin
 gina.yin@linamar.com
 T: (226)326-0125
 F: (226)326-0124

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.