




OIL ANALYSIS REPORT

Sample Rating Trend

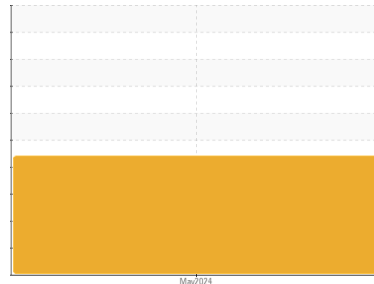

ISO



Machine Id

7149

Component

Hydraulic System

Fluid

PETRO CANADA HYDREX MV 32 (--- GAL)

DIAGNOSIS

▲ Recommendation

Nous vous recommandons de vérifier tous les endroits par lesquels des contaminants peuvent pénétrer dans le système. Nous vous recommandons de remplacer le filtre et d'utiliser un système de filtrage hors-ligne afin d'améliorer la propreté du fluide. Le reniflard d'air doit être réparé. S'il n'est pas classé, nous vous recommandons de le remplacer par un reniflard à air adapté au micron et / ou au dessicant. Si évalué, nous vous recommandons de réparer / remplacer le reniflard. Échantillonner de nouveau dans 30 à 45 jours afin de contrôler la situation.

Wear

Les taux d'usure de tous les composants sont normaux.

▲ Contamination

Il y a une quantité élevée de matières particulaires (2 à 100 µm de taille) présente dans l'huile.

Fluid Condition

L'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0119687	---	---
Sample Date	Client Info	07 May 2024	---	---
Machine Age	hrs Client Info	87293	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		SEVERE	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >20	13	---	---
Chromium	ppm ASTM D5185(m) >10	0	---	---
Nickel	ppm ASTM D5185(m) >10	0	---	---
Titanium	ppm ASTM D5185(m)	0	---	---
Silver	ppm ASTM D5185(m)	0	---	---
Aluminum	ppm ASTM D5185(m) >10	1	---	---
Lead	ppm ASTM D5185(m) >10	0	---	---
Copper	ppm ASTM D5185(m) >75	<1	---	---
Tin	ppm ASTM D5185(m) >10	0	---	---
Antimony	ppm ASTM D5185(m)	0	---	---
Vanadium	ppm ASTM D5185(m)	0	---	---
Beryllium	ppm ASTM D5185(m)	0	---	---
Cadmium	ppm ASTM D5185(m)	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	<1	---	---
Barium	ppm ASTM D5185(m) 0	0	---	---
Molybdenum	ppm ASTM D5185(m) 0	0	---	---
Manganese	ppm ASTM D5185(m) 1	0	---	---
Magnesium	ppm ASTM D5185(m) 0	9	---	---
Calcium	ppm ASTM D5185(m) 50	66	---	---
Phosphorus	ppm ASTM D5185(m) 330	344	---	---
Zinc	ppm ASTM D5185(m) 430	432	---	---
Sulfur	ppm ASTM D5185(m) 760	775	---	---
Lithium	ppm ASTM D5185(m)	<1	---	---

CONTAMINANTS




method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >20	<1	---	---
Sodium	ppm ASTM D5185(m)	<1	---	---
Potassium	ppm ASTM D5185(m) >20	<1	---	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 121346	---	---
Particles >6µm	ASTM D7647 >1300	▲ 48298	---	---
Particles >14µm	ASTM D7647 >160	▲ 1282	---	---
Particles >21µm	ASTM D7647 >40	▲ 173	---	---
Particles >38µm	ASTM D7647 >10	7	---	---
Particles >71µm	ASTM D7647 >3	1	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 24/23/17	---	---



OIL ANALYSIS REPORT

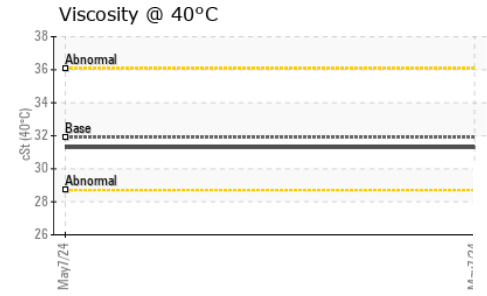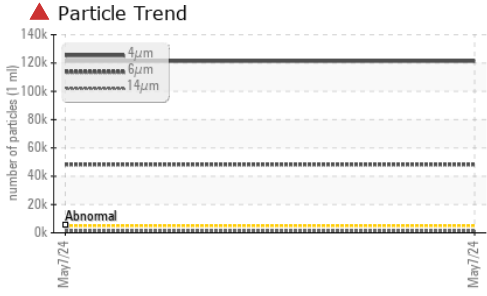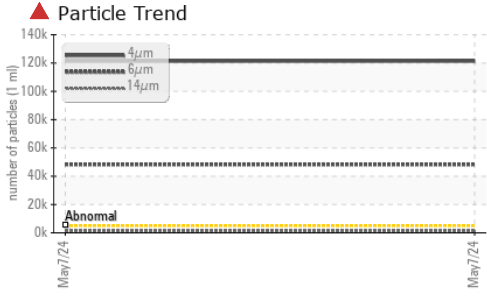





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	31.3	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

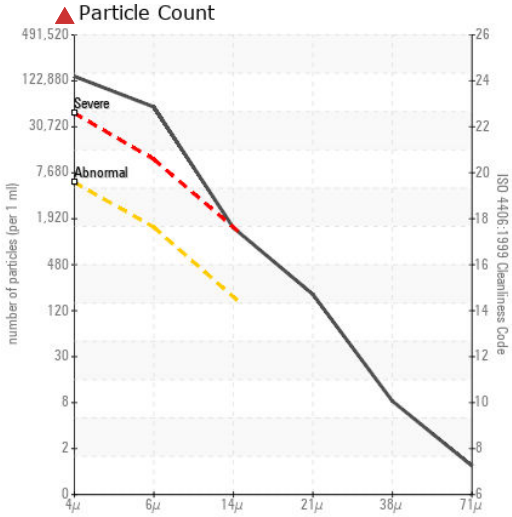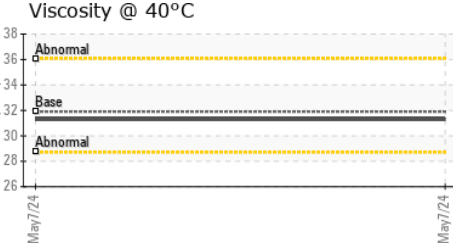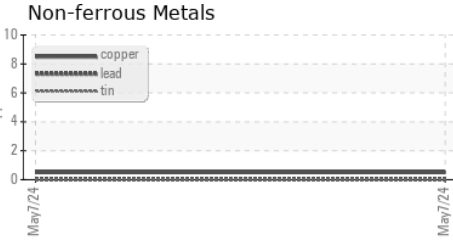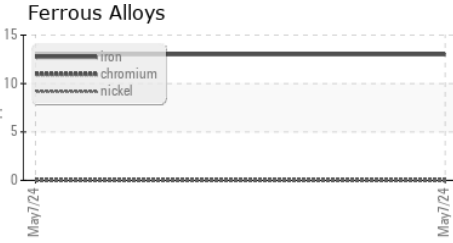

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 780 - GMA - ICI - Solid Waste**
Sample No. : GFL0119687 **Received** : 13 May 2024 4365 boul. St-Elzear Ouest,
Lab Number : **02634979** **Tested** : 14 May 2024 Laval, QC
Unique Number : 5776132 **Diagnosed** : 14 May 2024 - Wes Davis CA H7P 4J3
Test Package : MOB 1 (Additional Tests: PrtCount) Contact: Pieces Laval
 pieces.laval@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.