




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

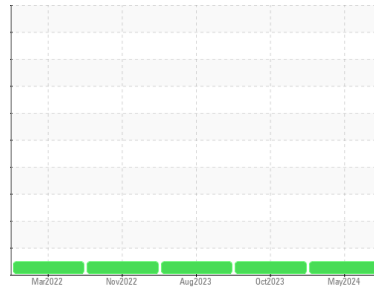

Machine Id  
**731073**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0117136</b>	GFL0097769	GFL0085877
Sample Date	Client Info		<b>13 May 2024</b>	26 Oct 2023	30 Aug 2023
Machine Age	hrs	Client Info	<b>4818</b>	3682	3360
Oil Age	hrs	Client Info	<b>1136</b>	1200	1200
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>12</b>	8	22
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>1</b>	1	2
Lead	ppm	ASTM D5185(m)	>30	<b>5</b>	3	16
Copper	ppm	ASTM D5185(m)	>35	<b>3</b>	2	3
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	50	<b>6</b>	17	5
Barium	ppm	ASTM D5185(m)	5	<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>53</b>	53	57
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	1
Magnesium	ppm	ASTM D5185(m)	560	<b>595</b>	559	623
Calcium	ppm	ASTM D5185(m)	1510	<b>1620</b>	1494	1647
Phosphorus	ppm	ASTM D5185(m)	780	<b>690</b>	705	768
Zinc	ppm	ASTM D5185(m)	870	<b>921</b>	887	961
Sulfur	ppm	ASTM D5185(m)	2040	<b>1988</b>	1978	2023
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>2</b>	3	5
Sodium	ppm	ASTM D5185(m)		<b>9</b>	6	12
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	2

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.9</b>	9.9	12.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.3</b>	20.0	29.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>20.1</b>	16.8	23.2











# OIL ANALYSIS REPORT

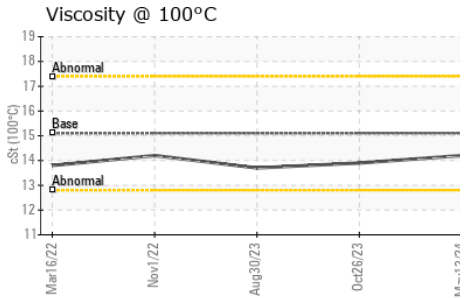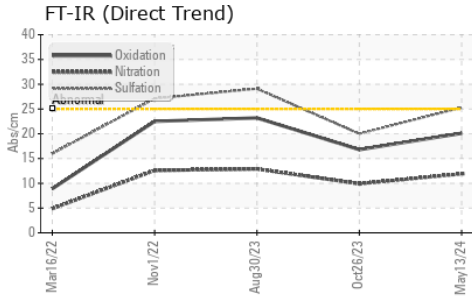

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.2	13.9

## GRAPHS

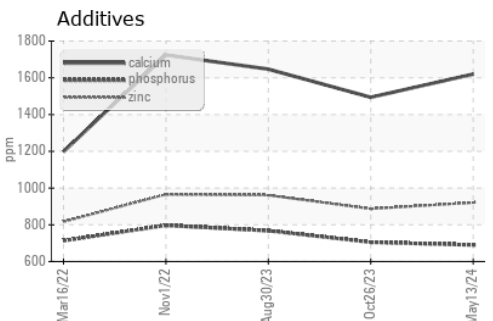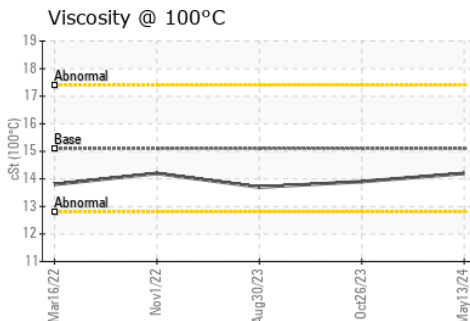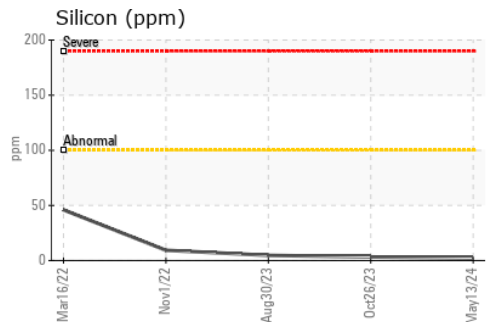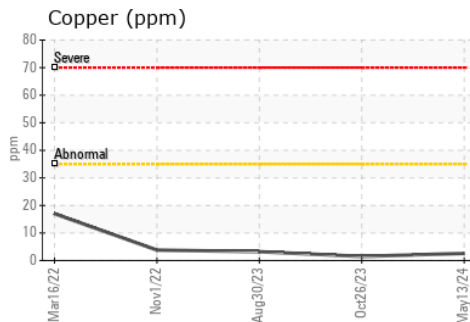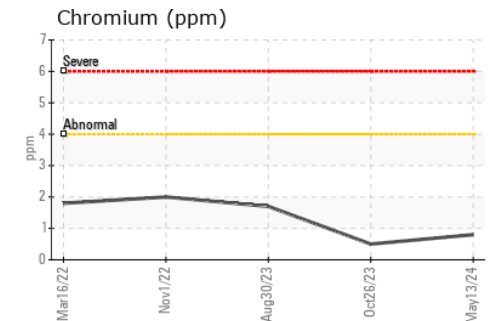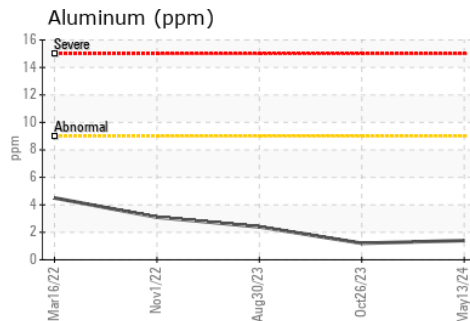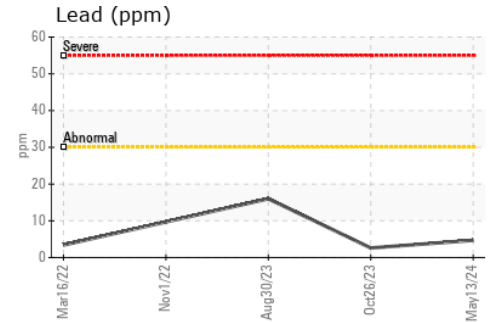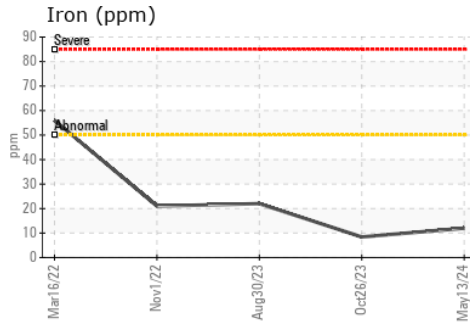

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0117136  
**Lab Number** : 02635246  
**Unique Number** : 5776399  
**Test Package** : MOB 1  
**Received** : 14 May 2024  
**Tested** : 14 May 2024  
**Diagnosed** : 14 May 2024 - Wes Davis

**GFL Environmental - 209 - Hamilton**  
 560 Seaman Street  
 Stoney Creek, ON  
 CA L8E 3X7  
 Contact: Fred Carleton  
 fred.carleton@gflenv.com  
 T: (289)925-6693  
 F: (905)664-9008

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.