




# OIL ANALYSIS REPORT

Sample Rating Trend

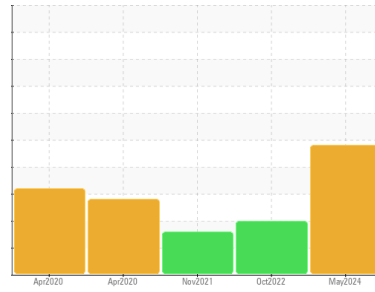

ISO



Machine Id  
**701051**  
 Component  
**Hydraulic System**  
 Fluid  
**PETRO CANADA HYDREX MV 32 (--- GAL)**

## DIAGNOSIS

### Recommendation

Nous vous recommandons de vérifier tous les endroits par lesquels des contaminants peuvent pénétrer dans le système. Nous vous recommandons de remplacer le filtre et d'utiliser un système de filtrage hors-ligne afin d'améliorer la propreté du fluide. Le reniflard d'air doit être réparé. S'il n'est pas classé, nous vous recommandons de le remplacer par un reniflard à air adapté au micron et / ou au dessicant. Si évalué, nous vous recommandons de réparer / remplacer le reniflard. Échantillonner de nouveau dans 30 à 45 jours afin de contrôler la situation.

### Wear

Les taux d'usure de tous les composants sont normaux.

### Contamination

Il y a une quantité élevée de matières particulaires (2 à 100 µm de taille) présente dans l'huile.

### Fluid Condition

L'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0120699</b>	GFL0055349	GFL0035055
Sample Date	Client Info		<b>17 May 2024</b>	26 Oct 2022	24 Nov 2021
Machine Age	hrs	Client Info	<b>18905</b>	11191	134993
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status			<b>SEVERE</b>	SEVERE	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >40	<b>10</b>	5	<1
Chromium	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	7	1
Aluminum	ppm	ASTM D5185(m) >8	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185(m) >5	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m) >20	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185(m) >2	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m) 1	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 0	<b>4</b>	<1	<1
Calcium	ppm	ASTM D5185(m) 50	<b>151</b>	44	51
Phosphorus	ppm	ASTM D5185(m) 330	<b>323</b>	347	328
Zinc	ppm	ASTM D5185(m) 430	<b>363</b>	395	402
Sulfur	ppm	ASTM D5185(m) 760	<b>821</b>	758	713
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>2</b>	<1	1
Sodium	ppm	ASTM D5185(m)	<b>3</b>	2	0
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	<1	<1

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 118553</b>	▲ 52830	▲ 28016
Particles >6µm	ASTM D7647	>1300	<b>▲ 30157</b>	▲ 6374	▲ 7247
Particles >14µm	ASTM D7647	>160	<b>▲ 1064</b>	76	▲ 439
Particles >21µm	ASTM D7647	>40	<b>▲ 225</b>	16	▲ 82
Particles >38µm	ASTM D7647	>10	<b>● 15</b>	1	5
Particles >71µm	ASTM D7647	>3	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 24/22/17</b>	▲ 23/20/13	▲ 22/20/16




# OIL ANALYSIS REPORT

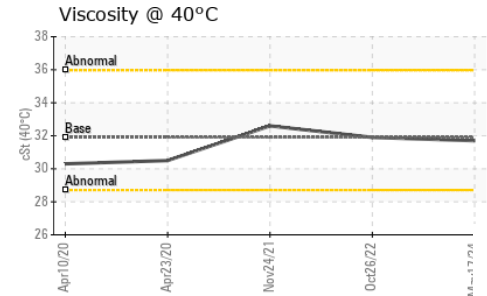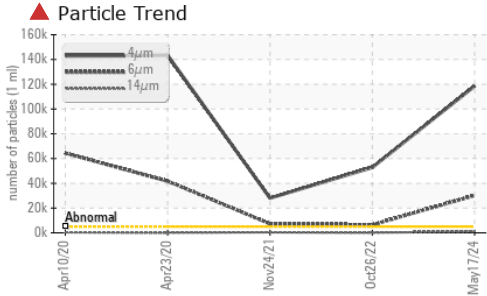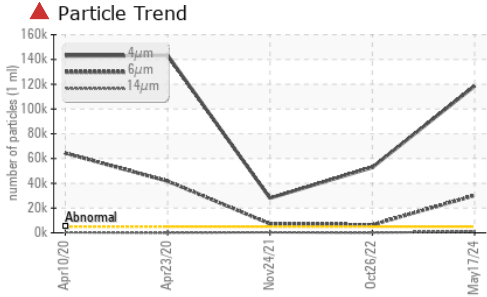





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	31.7	31.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

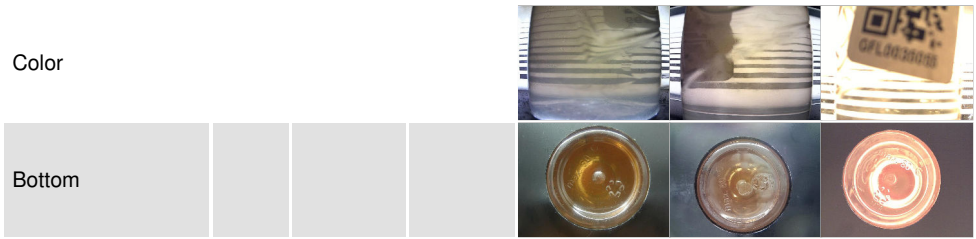

## GRAPHS

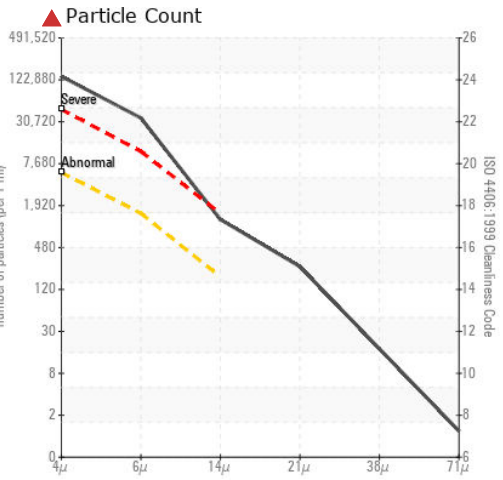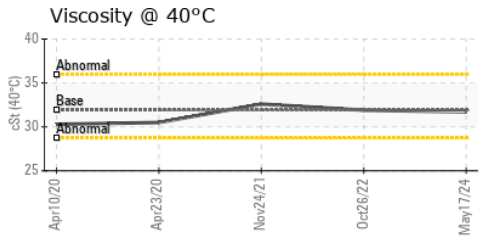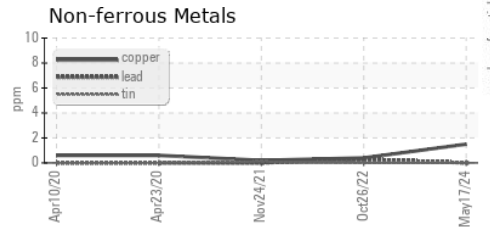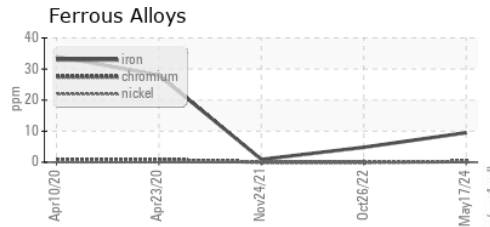

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9    **GFL Environmental - 747 - GMA - Solid Waste**  
**Sample No.** : GFL0120699    **Received** : 22 May 2024    4 Chemin du Tremblay,  
**Lab Number** : **02636954**    **Tested** : 23 May 2024    Boucherville, QC  
**Unique Number** : 5786116    **Diagnosed** : 23 May 2024 - Wes Davis    CA J4B 6Z5  
**Test Package** : MOB 1 ( Additional Tests: PrtCount )    Contact: Steve Voyer  
 svoyer@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.