


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

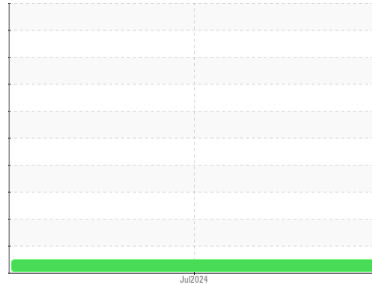

Machine Id
CRYSTALLYZER #1

Component
Gearbox

Fluid
PETRO CANADA ENDURATEX EP 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0087801	---	---
Sample Date	Client Info		05 Jul 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		3	---	---
Iron	ppm	ASTM D5185(m) >200	74	---	---
Chromium	ppm	ASTM D5185(m) >15	<1	---	---
Nickel	ppm	ASTM D5185(m) >15	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >25	1	---	---
Lead	ppm	ASTM D5185(m) >100	0	---	---
Copper	ppm	ASTM D5185(m) >200	<1	---	---
Tin	ppm	ASTM D5185(m) >25	0	---	---
Antimony	ppm	ASTM D5185(m) >5	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	42	---	---
Barium	ppm	ASTM D5185(m) 0	0	---	---
Molybdenum	ppm	ASTM D5185(m) 0	0	---	---
Manganese	ppm	ASTM D5185(m) 0	<1	---	---
Magnesium	ppm	ASTM D5185(m) 0	6	---	---
Calcium	ppm	ASTM D5185(m) 0	2	---	---
Phosphorus	ppm	ASTM D5185(m) 270	264	---	---
Zinc	ppm	ASTM D5185(m) 0	4	---	---
Sulfur	ppm	ASTM D5185(m) 4500	4660	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---





CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	12	---	---
Sodium	ppm	ASTM D5185(m)	2	---	---
Potassium	ppm	ASTM D5185(m) >20	0	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.4	0.44	---	---

OIL ANALYSIS REPORT

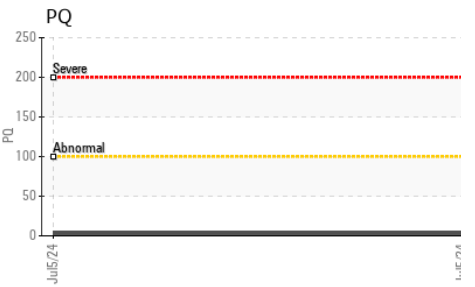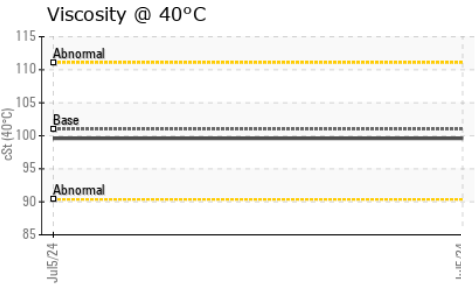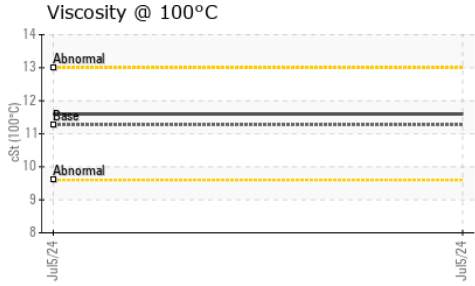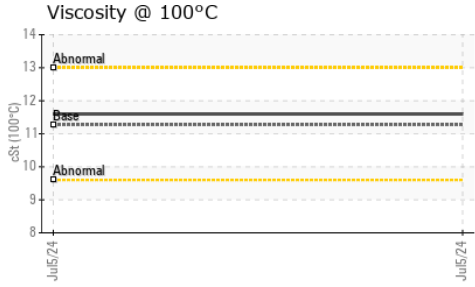





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	101	99.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.27	11.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	97	104	---	---

SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

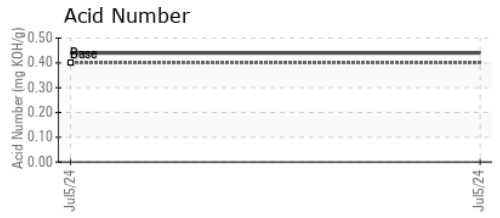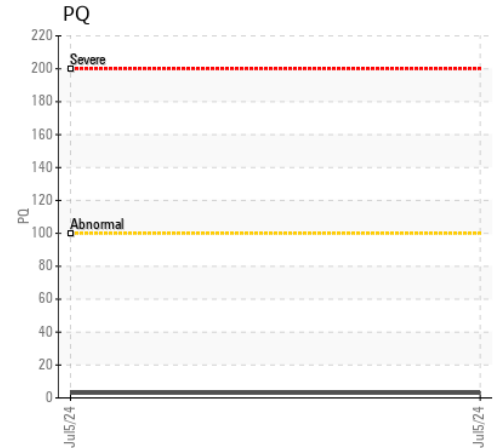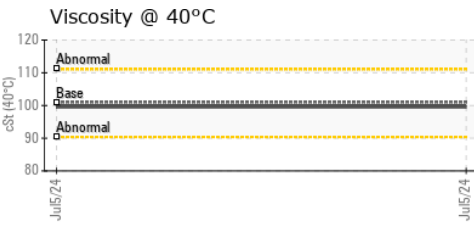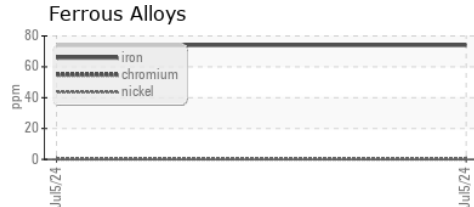

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0087801 **Received** : 11 Jul 2024
Lab Number : **02647430** **Tested** : 11 Jul 2024
Unique Number : 5812982 **Diagnosed** : 11 Jul 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

SAPUTO FOODS LTD
 284 HOPE STREET WEST
 TAVISTOCK, ON
 CA N0B 2R0
 Contact: Joseph Ross
 joseph.ross@saputo.com
 T: (519)655-2337
 F: (519)655-3449