




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

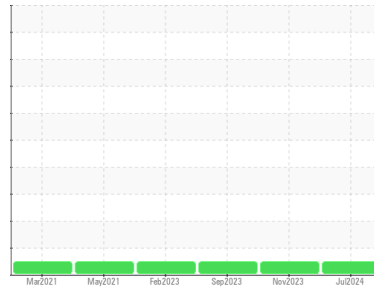

Machine Id  
**830003**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL</b>	GFL0097633	GFL0093903
Sample Date	Client Info		<b>17 Jul 2024</b>	18 Nov 2023	14 Sep 2023
Machine Age	hrs	Client Info	<b>0</b>	7458	137782
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>16</b>	10	22
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	1	1
Lead	ppm	ASTM D5185(m)	>30	<b>4</b>	1	4
Copper	ppm	ASTM D5185(m)	>35	<b>1</b>	<1	2
Tin	ppm	ASTM D5185(m)	>4	<b>1</b>	<1	2
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	50	<b>8</b>	11	9
Barium	ppm	ASTM D5185(m)	5	<b>&lt;1</b>	<1	6
Molybdenum	ppm	ASTM D5185(m)	50	<b>56</b>	51	51
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	3
Magnesium	ppm	ASTM D5185(m)	560	<b>571</b>	574	525
Calcium	ppm	ASTM D5185(m)	1510	<b>1680</b>	1554	1568
Phosphorus	ppm	ASTM D5185(m)	780	<b>715</b>	709	643
Zinc	ppm	ASTM D5185(m)	870	<b>928</b>	925	871
Sulfur	ppm	ASTM D5185(m)	2040	<b>2000</b>	2030	1902
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>3</b>	5	16
Sodium	ppm	ASTM D5185(m)		<b>11</b>	6	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.4</b>	10.0	10.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.9</b>	20.3	20.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>21.5</b>	17.3	17.4











# OIL ANALYSIS REPORT

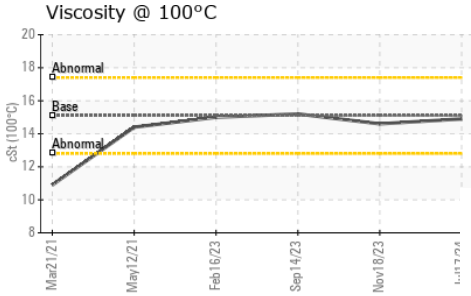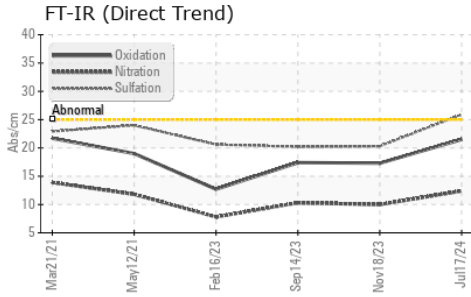

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.9	14.6

## GRAPHS

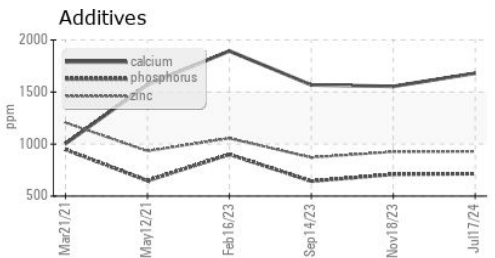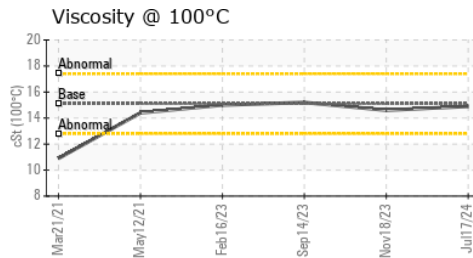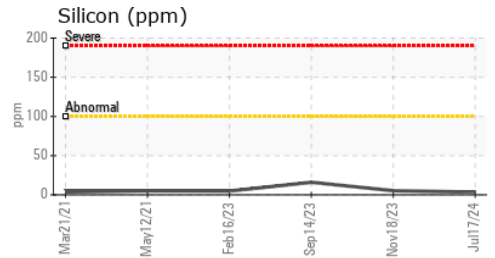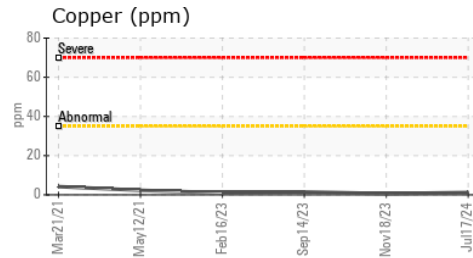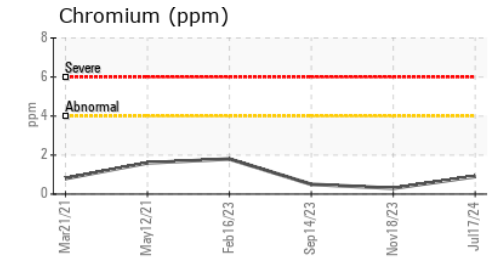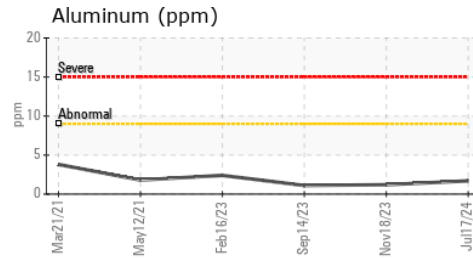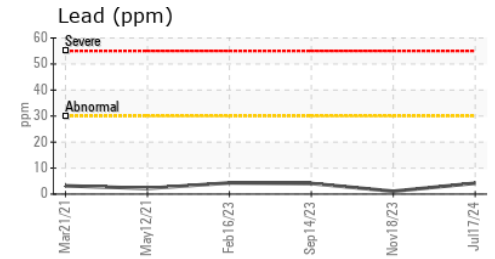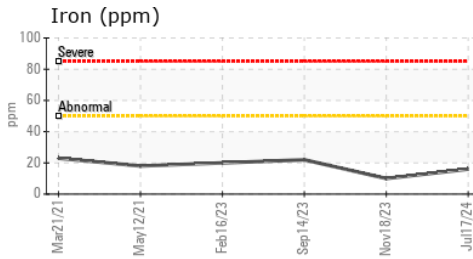

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL  
**Lab Number** : 02648597  
**Unique Number** : 5814149  
**Test Package** : MOB 1 ( Additional Tests: Visual )  
**Received** : 18 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 18 Jul 2024 - Kevin Marson

**GFL Environmental - 554 - Edmonton SW**  
 8409 -15th Street NW  
 Edmonton, AB  
 CA T6P 0B8  
 Contact: Tim Greig  
 tgreig@gflenv.com  
 T: (780)231-0521  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.