




# OIL ANALYSIS REPORT

Sample Rating Trend

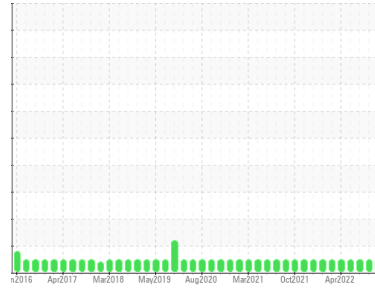

**NORMAL**



Machine Id  
**10546C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (9 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Oil sample )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0071806</b>	GFL0052794	GFL0052758
Sample Date	Client Info		<b>24 Mar 2023</b>	09 Jan 2023	25 Oct 2022
Machine Age	hrs	Client Info	<b>7464</b>	6873	6494
Oil Age	hrs	Client Info	<b>591</b>	659	280
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>11</b>	18	13
Chromium	ppm	ASTM D5185m >4	<b>1</b>	2	1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>4</b>	<1	2
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >35	<b>1</b>	1	2
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>15</b>	14	22
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 50	<b>51</b>	65	56
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>543</b>	652	598
Calcium	ppm	ASTM D5185m 1510	<b>1635</b>	1922	1733
Phosphorus	ppm	ASTM D5185m 780	<b>699</b>	877	826
Zinc	ppm	ASTM D5185m 870	<b>971</b>	1153	1042
Sulfur	ppm	ASTM D5185m 2040	<b>2365</b>	2366	2672

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>5</b>	5	5
Sodium	ppm	ASTM D5185m	<b>5</b>	7	5
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	4

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.6</b>	11.3	10.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.6</b>	22.2	21.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.0</b>	17.8	18.0
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>7.0</b>	6.2	8.4







# OIL ANALYSIS REPORT

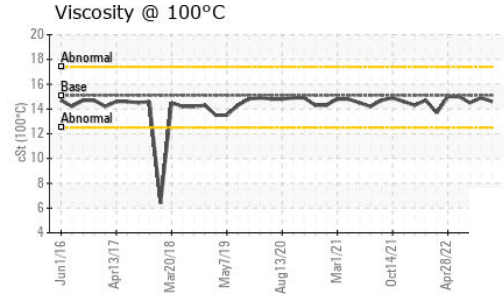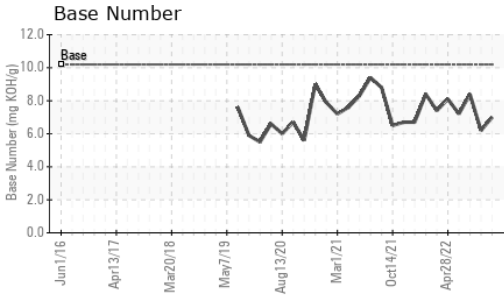

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.6</b>	14.9	14.5

## GRAPHS

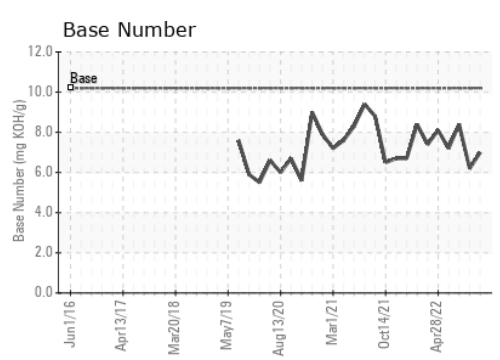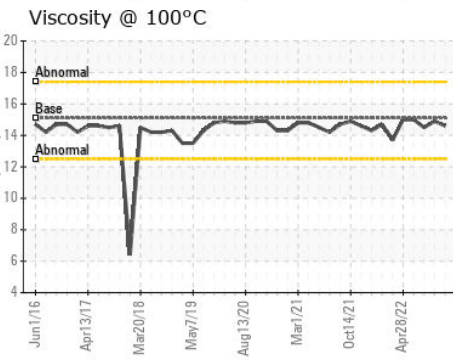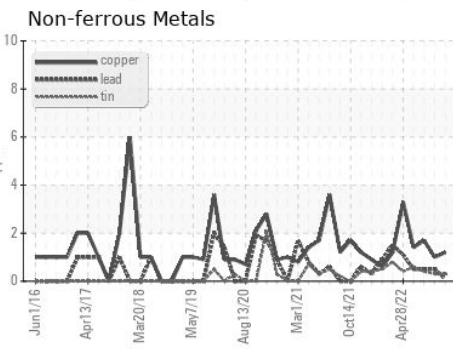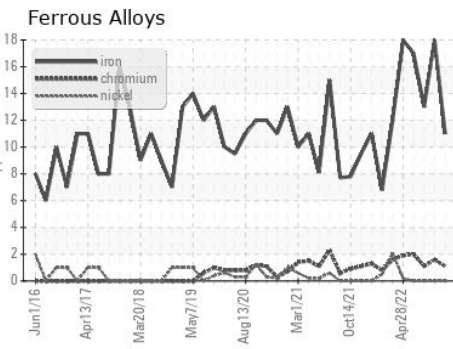

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0071806 **Received** : 27 Mar 2023  
**Lab Number** : **05801894** **Diagnosed** : 29 Mar 2023  
**Unique Number** : 10399423 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 331 - Columbus**  
 180 Ada Moore Rd  
 Columbus, NC  
 US 28722  
 Contact: Matt Segars  
 matt.segars@gflenv.com  
 T: (800)207-6618  
 F: (252)617-2494

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)