OIL ANALYSIS REPORT

Sample Rating Trend

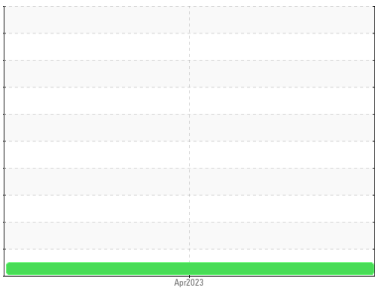

NORMAL

Machine Id
847001
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
Metal levels are typical for a components first oil change.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**GFL0065046**	---	---
Sample Date		Client Info		**20 Apr 2023**	---	---
Machine Age	hrs	Client Info		**14254**	---	---
Oil Age	hrs	Client Info		**14254**	---	---
Oil Changed		Client Info		**Not Changd**	---	---
Sample Status				**NORMAL**	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.1	**NEG**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	**17**	---	---
Chromium	ppm	ASTM D5185m	>4	**2**	---	---
Nickel	ppm	ASTM D5185m	>2	**0**	---	---
Titanium	ppm	ASTM D5185m		**0**	---	---
Silver	ppm	ASTM D5185m	>3	**0**	---	---
Aluminum	ppm	ASTM D5185m	>9	**4**	---	---
Lead	ppm	ASTM D5185m	>30	**<1**	---	---
Copper	ppm	ASTM D5185m	>35	**<1**	---	---
Tin	ppm	ASTM D5185m	>4	**<1**	---	---
Vanadium	ppm	ASTM D5185m		**0**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	**7**	---	---
Barium	ppm	ASTM D5185m	5	**0**	---	---
Molybdenum	ppm	ASTM D5185m	50	**59**	---	---
Manganese	ppm	ASTM D5185m	0	**<1**	---	---
Magnesium	ppm	ASTM D5185m	560	**619**	---	---
Calcium	ppm	ASTM D5185m	1510	**1808**	---	---
Phosphorus	ppm	ASTM D5185m	780	**765**	---	---
Zinc	ppm	ASTM D5185m	870	**1042**	---	---
Sulfur	ppm	ASTM D5185m	2040	**2772**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	**5**	---	---
Sodium	ppm	ASTM D5185m		**10**	---	---
Potassium	ppm	ASTM D5185m	>20	**0**	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		**0**	---	---
Nitration	Abs/cm	*ASTM D7624	>20	**13.1**	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	**24.5**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	**19.9**	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	**4.3**	---	---

OIL ANALYSIS REPORT

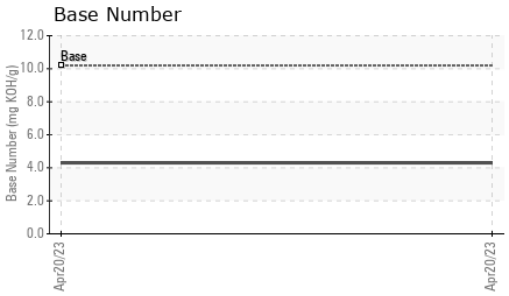

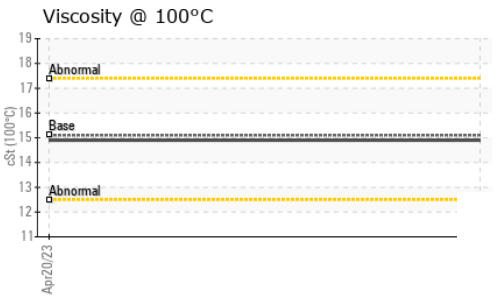

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.1	**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	**14.9**	---	---

GRAPHS

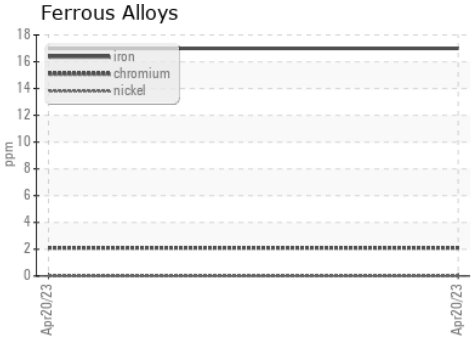

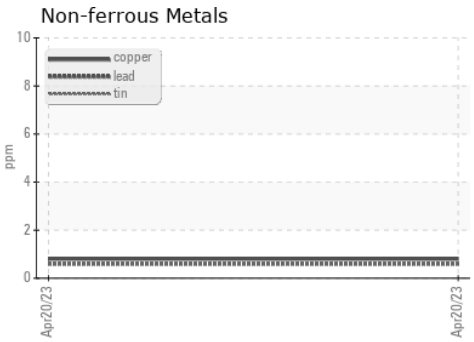

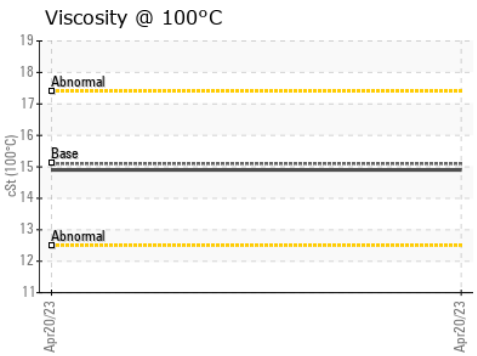

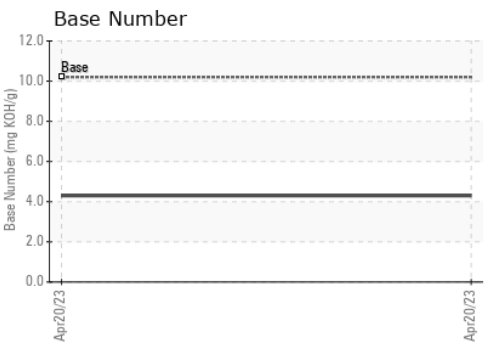

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0065046
Lab Number : 05849402
Unique Number : 10473509
Test Package : FLEET

Recieved : 17 May 2023
Diagnosed : 18 May 2023
Diagnostician : Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GFL Environmental - 932 - Muskego HC
W144 S6400 College Ct.
Muskego, WI
US 53150
Contact: Brian Schlomann
brian.schlomann@gflenv.com
T: (262)510-4586
F: