




# OIL ANALYSIS REPORT

Sample Rating Trend

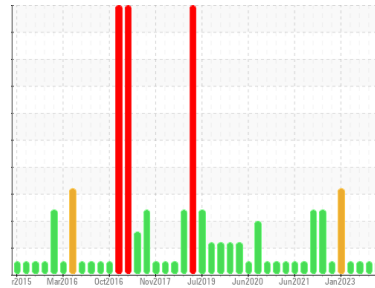

**NORMAL**



Machine Id  
**10100**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal for time on oil..

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>GFL0083199</b>	GFL0076725	GFL0062567
Sample Date	Client Info		<b>20 Jun 2023</b>	03 Apr 2023	10 Mar 2023
Machine Age	hrs	Client Info	<b>11226</b>	11104	10957
Oil Age	hrs	Client Info	<b>558</b>	151	284
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >90	<b>91</b>	59	38
Chromium	ppm	ASTM D5185m >20	<b>4</b>	3	3
Nickel	ppm	ASTM D5185m >2	<b>2</b>	1	2
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>11</b>	7	7
Lead	ppm	ASTM D5185m >40	<b>3</b>	2	<1
Copper	ppm	ASTM D5185m >330	<b>5</b>	1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	<b>16</b>	18	24
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	65	61
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>715</b>	678	623
Calcium	ppm	ASTM D5185m 1070	<b>1103</b>	1052	1070
Phosphorus	ppm	ASTM D5185m 1150	<b>899</b>	857	862
Zinc	ppm	ASTM D5185m 1270	<b>1144</b>	1104	1065
Sulfur	ppm	ASTM D5185m 2060	<b>3224</b>	2915	2596

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<b>25</b>	20	14
Sodium	ppm	ASTM D5185m	<b>21</b>	13	10
Potassium	ppm	ASTM D5185m >20	<b>4</b>	1	2

## INFRA-RED




	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >6	<b>2.9</b>	1.4	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.5</b>	10.3	8.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.7</b>	20.8	18.9

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.5</b>	16.2	13.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.8</b>	7.6	8.1







# OIL ANALYSIS REPORT

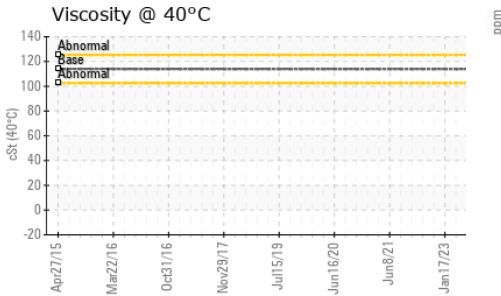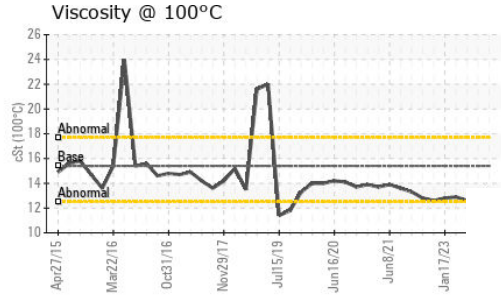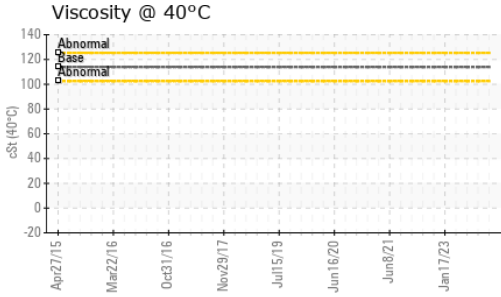

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.41</b>	12.6	12.6

## GRAPHS

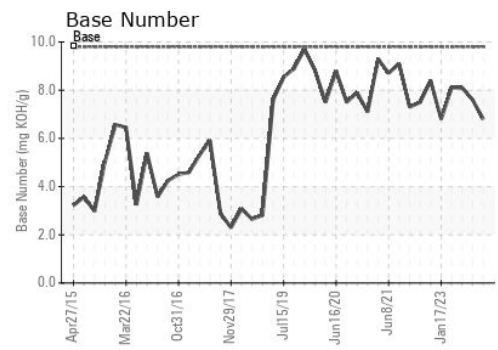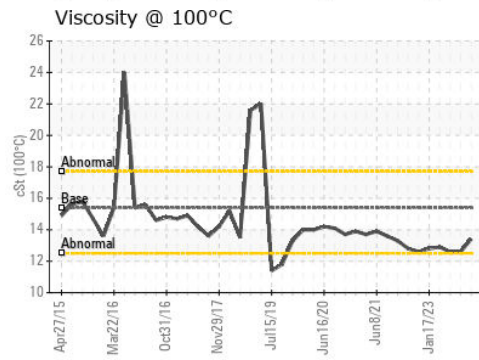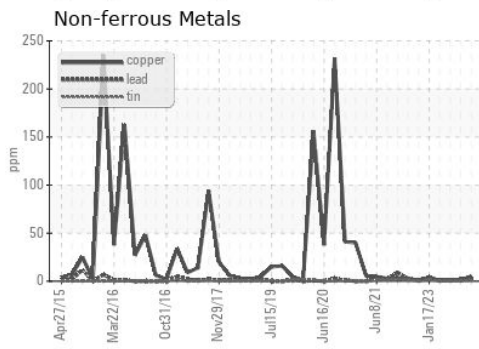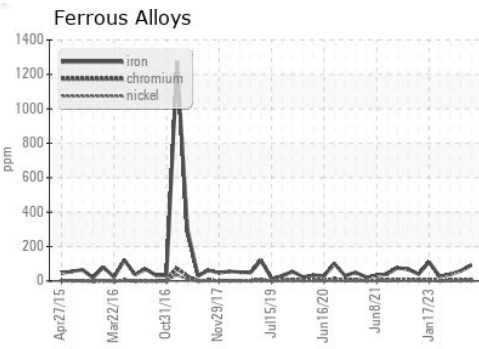

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0083199 **Received** : 23 Jun 2023  
**Lab Number** : **05882395** **Diagnosed** : 29 Jun 2023  
**Unique Number** : 10532878 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET ( Additional Tests: KV40 )

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: