




OIL ANALYSIS REPORT

Sample Rating Trend

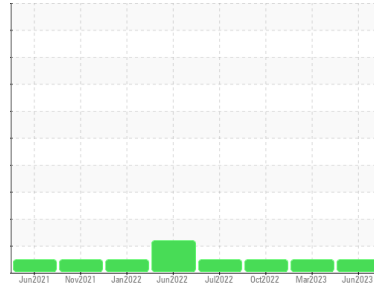

NORMAL



Machine Id
323006-857
 Component
Gasoline Engine
 Fluid
Napa 5w-20 (6 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2	
Sample Number	Client Info	GFL0062191	GFL0062234	GFL0055095	
Sample Date	Client Info	26 Jun 2023	13 Mar 2023	05 Oct 2022	
Machine Age	mls	Client Info	162050	157983	151444
Oil Age	mls	Client Info	2592	6539	600
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >4.0	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history 1	history 2	
Iron	ppm	ASTM D5185m >150	16	37	7
Chromium	ppm	ASTM D5185m >20	<1	<1	1
Nickel	ppm	ASTM D5185m >5	<1	<1	1
Titanium	ppm	ASTM D5185m	0	0	1
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >40	2	3	<1
Lead	ppm	ASTM D5185m >50	0	0	<1
Copper	ppm	ASTM D5185m >155	<1	<1	1
Tin	ppm	ASTM D5185m >10	<1	0	1
Vanadium	ppm	ASTM D5185m	0	0	2
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history 1	history 2	
Boron	ppm	ASTM D5185m	70	17	27
Barium	ppm	ASTM D5185m	0	0	<1
Molybdenum	ppm	ASTM D5185m	94	214	84
Manganese	ppm	ASTM D5185m	<1	<1	1
Magnesium	ppm	ASTM D5185m	494	453	457
Calcium	ppm	ASTM D5185m	933	1113	855
Phosphorus	ppm	ASTM D5185m	622	605	561
Zinc	ppm	ASTM D5185m	691	725	629
Sulfur	ppm	ASTM D5185m	2963	1851	2409

CONTAMINANTS

method	limit/base	current	history 1	history 2	
Silicon	ppm	ASTM D5185m >30	11	15	11
Sodium	ppm	ASTM D5185m >400	3	<1	7
Potassium	ppm	ASTM D5185m >20	0	2	<1

INFRA-RED



method	limit/base	current	history 1	history 2	
Soot %	%	*ASTM D7844	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	8.6	10.2	9.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.0	21.3	21.1

FLUID DEGRADATION

method	limit/base	current	history 1	history 2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.2	15.2	13.0
Base Number (BN)	mg KOH/g	ASTM D2896	4.5	3.5	4.9







OIL ANALYSIS REPORT

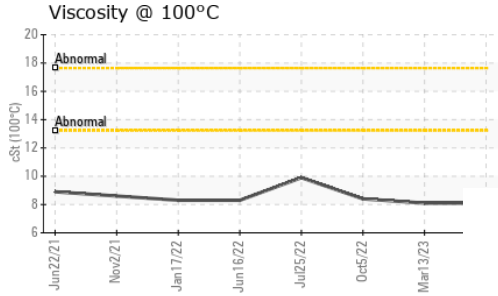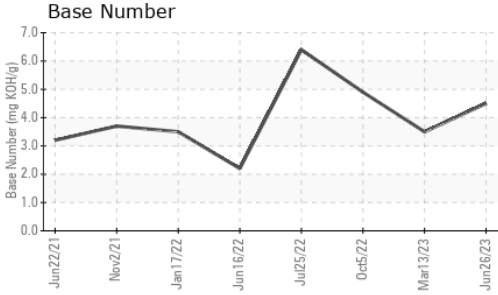

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	8.1	8.1	8.4

GRAPHS

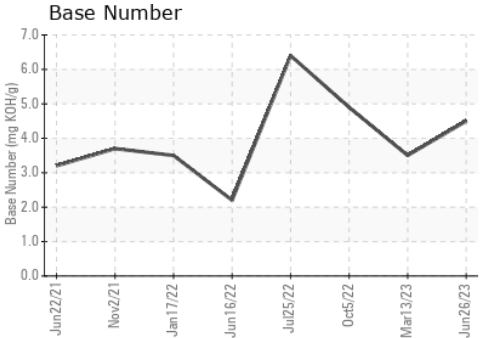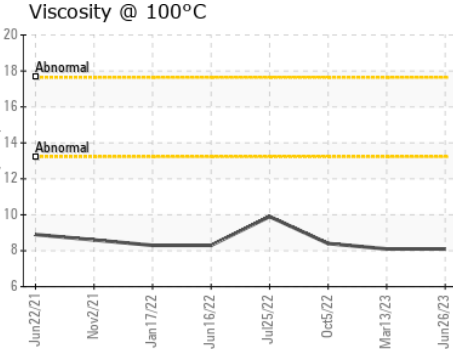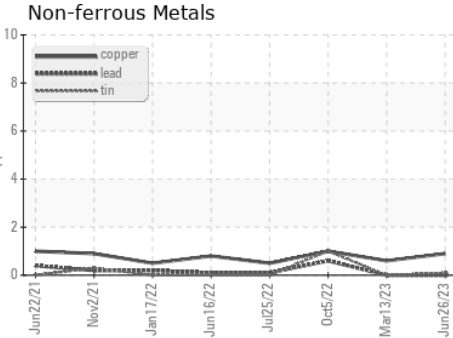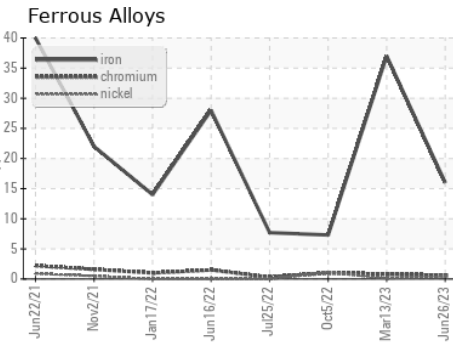

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0062191 **Received** : 29 Jun 2023
Lab Number : **05886468** **Diagnosed** : 03 Jul 2023
Unique Number : 10536951 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 626 - Cadillac Hauling
 1501 Ron Wilson St
 Cadillac, MI
 US 49601
 Contact: GARY BREWER
 gbrewerjr@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: