


OIL ANALYSIS REPORT



Area
G.LOPES CONSTRUCTION INC./Off-Road
 Machine Id
L336
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

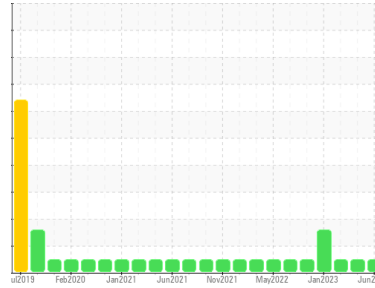

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		PCA0098311	PCA0090578	PCA0090777
Sample Date	Client Info		28 Jun 2023	09 May 2023	02 Mar 2023
Machine Age	hrs	Client Info	8761	8450	7770
Oil Age	hrs	Client Info	5456	5825	5145
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >100	11	11	15
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	0
Titanium	ppm	ASTM D5185m >2	1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	0	1	<1
Lead	ppm	ASTM D5185m >40	<1	1	3
Copper	ppm	ASTM D5185m >330	2	3	4
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	5	3	2
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	70	68	65
Manganese	ppm	ASTM D5185m 0	<1	<1	1
Magnesium	ppm	ASTM D5185m 1010	1090	1055	1027
Calcium	ppm	ASTM D5185m 1070	1233	1212	1169
Phosphorus	ppm	ASTM D5185m 1150	1172	1125	1022
Zinc	ppm	ASTM D5185m 1270	1439	1413	1318
Sulfur	ppm	ASTM D5185m 2060	4136	3932	3500

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	4	5	9
Sodium	ppm	ASTM D5185m	33	29	32
Potassium	ppm	ASTM D5185m >20	12	15	12



INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	0.4	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	9.5	9.5	10.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.2	20.6	21.2

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.3	18.1	19.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	11.27	9.81	9.86









OIL ANALYSIS REPORT

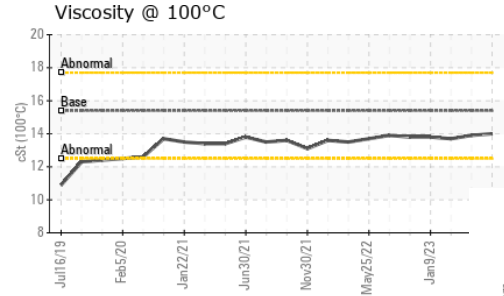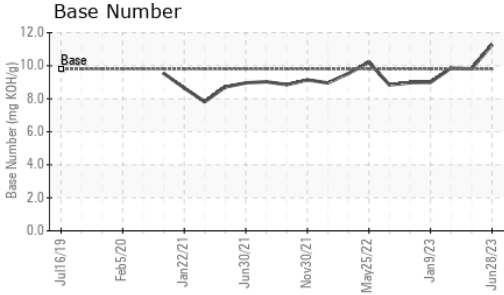

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.9	13.7

GRAPHS

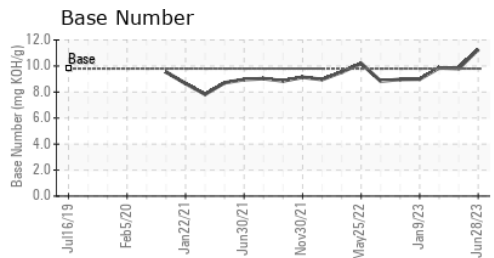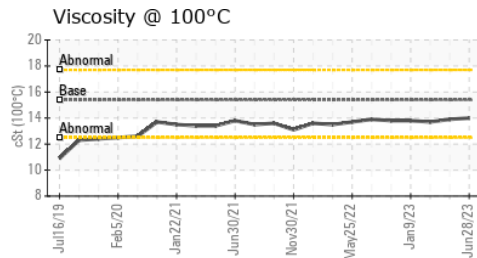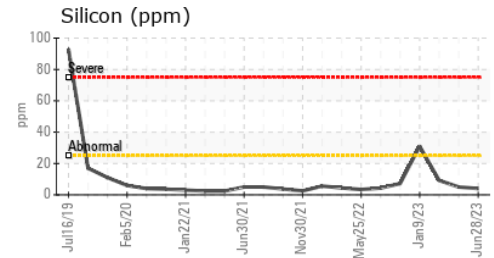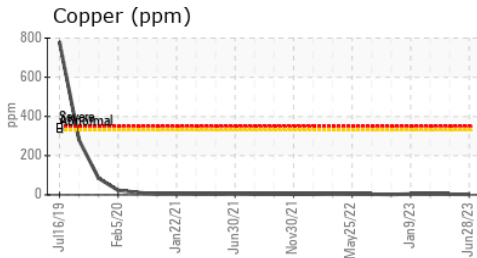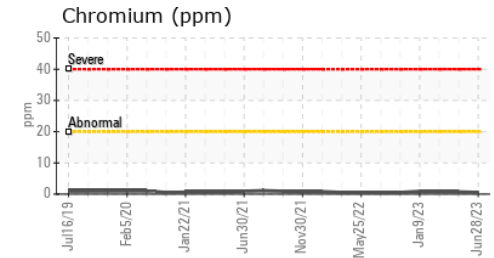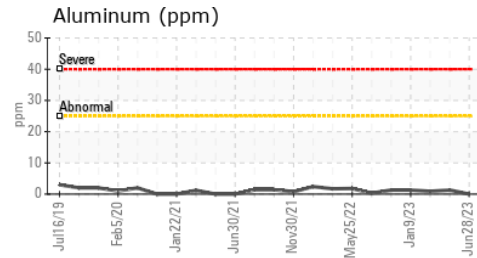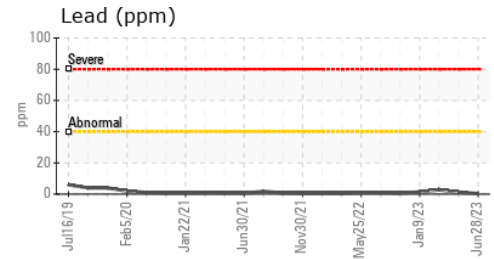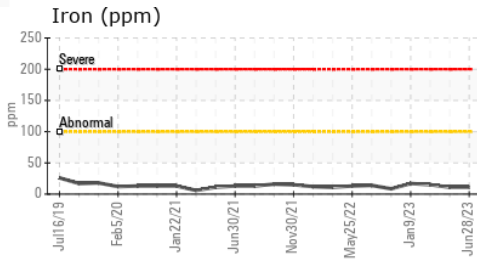

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0098311 **Received** : 30 Jun 2023
Lab Number : 05887986 **Diagnosed** : 03 Jul 2023
Unique Number : 10538469 **Diagnostician** : Wes Davis
Test Package : MOB 2

G LOPES CONSTRUCTION
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: BUTCH MCGRATH
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: