


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

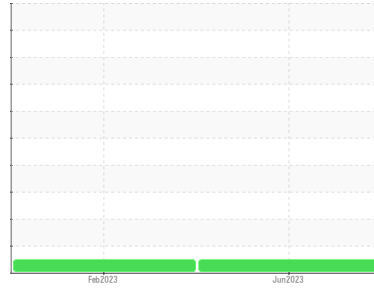

Machine Id  
**621333**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>PCA0100773</b>	PCA0090132	---
Sample Date	Client Info		<b>27 Jun 2023</b>	07 Feb 2023	---
Machine Age	mls	Client Info	<b>6345</b>	3126	---
Oil Age	mls	Client Info	<b>6345</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >100	<b>6</b>	13	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>5</b>	5	---
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	1	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m >330	<b>3</b>	15	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 2	<b>17</b>	44	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>54</b>	58	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185m 950	<b>922</b>	827	---
Calcium	ppm	ASTM D5185m 1050	<b>1171</b>	1157	---
Phosphorus	ppm	ASTM D5185m 995	<b>1047</b>	964	---
Zinc	ppm	ASTM D5185m 1180	<b>1270</b>	1128	---
Sulfur	ppm	ASTM D5185m 2600	<b>3941</b>	3076	---

### CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	11	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	1	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	7	---



### INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.5</b>	6.1	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.8</b>	18.4	---

### FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.5</b>	14.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.4</b>	9.1	---









# OIL ANALYSIS REPORT

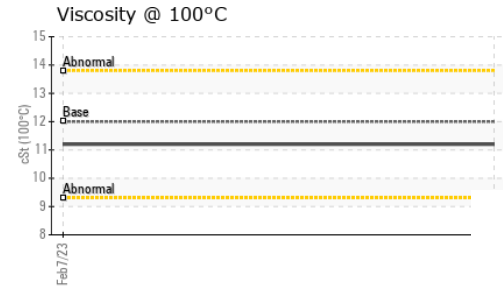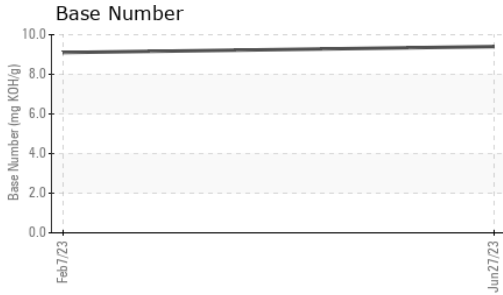

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	---

## GRAPHS

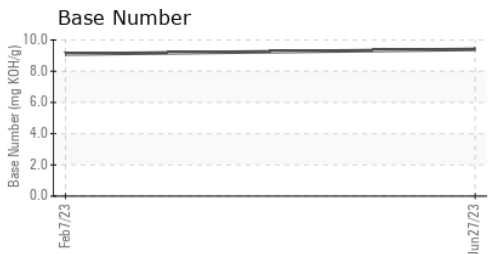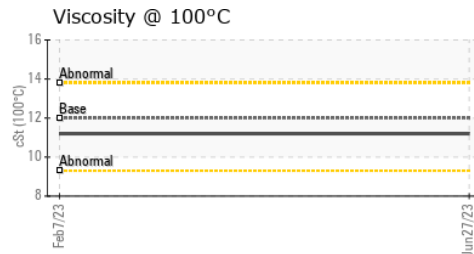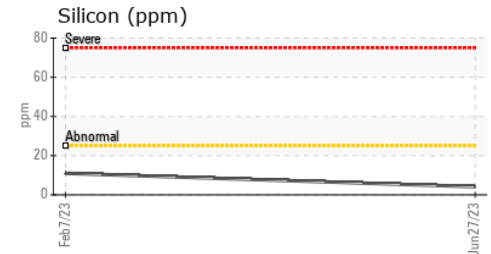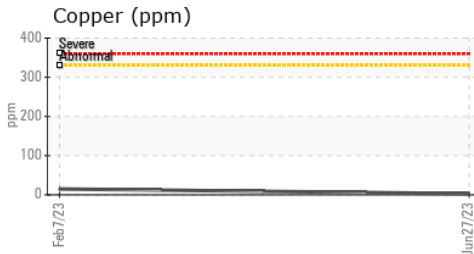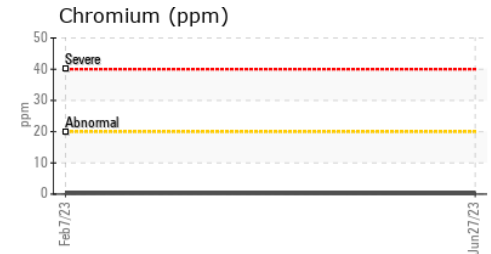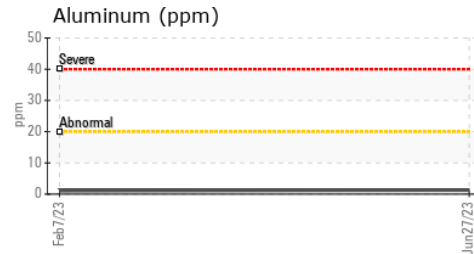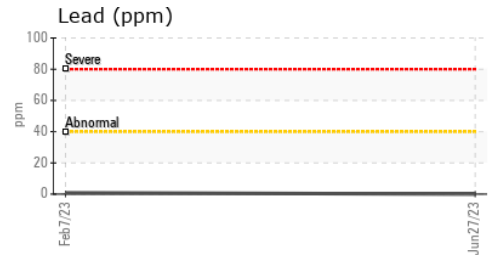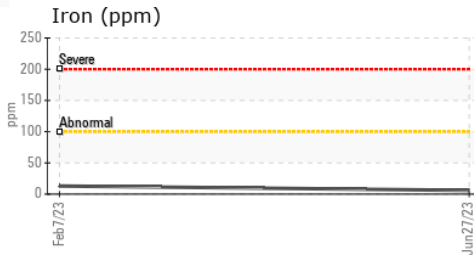

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0100773 **Received** : 07 Jul 2023  
**Lab Number** : 05891976 **Diagnosed** : 07 Jul 2023  
**Unique Number** : 10547786 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #118**  
 2196 BENNETT ROAD  
 PHILADELPHIA, PA  
 US 19116  
 Contact: JOHN KEEN  
 jkeen@millertransgroup.com  
 T: (215)552-9832  
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)