




# OIL ANALYSIS REPORT

Sample Rating Trend

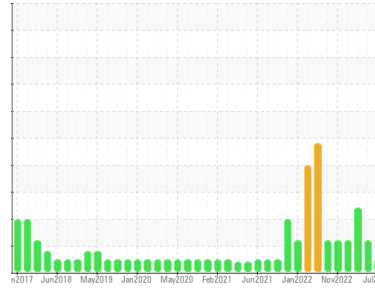

**NORMAL**



Machine Id  
**10801**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>GFL0074603</b>	GFL0083621	GFL0083618
Sample Date	Client Info	<b>07 Jul 2023</b>	05 Jun 2023	25 May 2023
Machine Age	hrs	<b>15495</b>	15284	15258
Oil Age	hrs	<b>237</b>	15258	14682
Oil Changed	Client Info	<b>Changed</b>	N/A	Changed
Sample Status		<b>NORMAL</b>	ABNORMAL	SEVERE

## CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<b>&lt;1.0</b>	▲ 2.4	■ 14.4
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >100	<b>13</b>	13	61
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	3
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	<1	3
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	0	2
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	<b>5</b>	37	6
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>57</b>	61	55
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>816</b>	762	776
Calcium	ppm ASTM D5185m 1070	<b>998</b>	1023	909
Phosphorus	ppm ASTM D5185m 1150	<b>848</b>	832	833
Zinc	ppm ASTM D5185m 1270	<b>1081</b>	1052	1041
Sulfur	ppm ASTM D5185m 2060	<b>3145</b>	3228	2798

## CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	<b>4</b>	5	13
Sodium	ppm ASTM D5185m	<b>10</b>	10	51
Potassium	ppm ASTM D5185m >20	<b>3</b>	<1	6

## INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.3	1.1
Nitration	Abs/cm *ASTM D7624 >20	<b>8.9</b>	6.4	14.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.8</b>	17.7	26.0

## FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.8</b>	13.0	26.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.1</b>	7.2	4.6







# OIL ANALYSIS REPORT

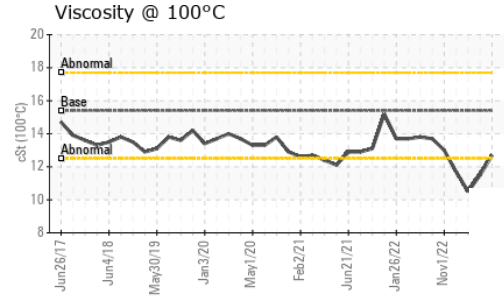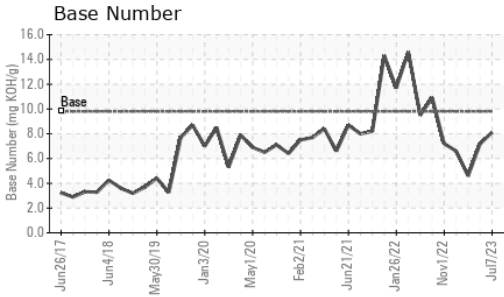

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.7	▲ 11.5	▲ 10.5

## GRAPHS

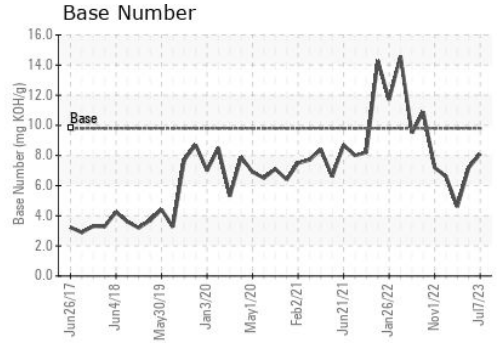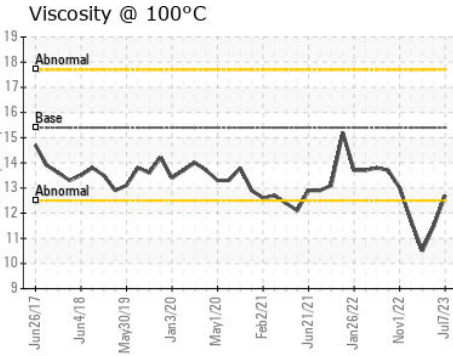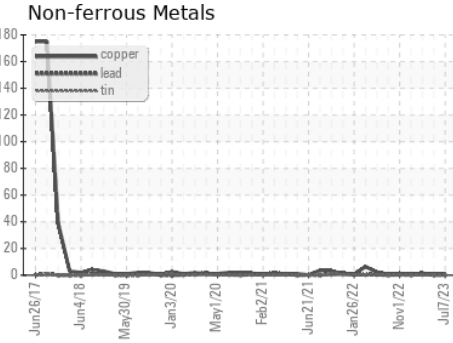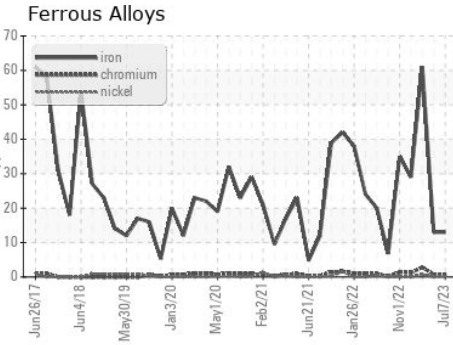

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0074603 **Received** : 11 Jul 2023  
**Lab Number** : 05894784 **Diagnosed** : 11 Jul 2023  
**Unique Number** : 10550594 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 095 - Atlanta West**  
 2699 Cochran Industrial Blvd  
 Douglasville, GA  
 US 30127-1332  
 Contact: Darrell Welch  
 darrell.welch@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)