




# OIL ANALYSIS REPORT

Sample Rating Trend

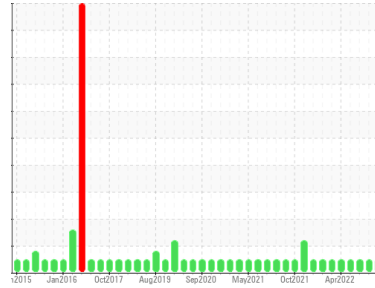

**NORMAL**



Machine Id  
**10537C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (5 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0088565</b>	GFL0061173	GFL0054692
Sample Date	Client Info		<b>17 Jul 2023</b>	09 May 2023	15 Nov 2022
Machine Age	hrs	Client Info	<b>399</b>	12368	12368
Oil Age	hrs	Client Info	<b>399</b>	629	412
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>10</b>	19	8
Chromium	ppm	ASTM D5185m >4	<b>1</b>	2	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	2	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>&lt;1</b>	0	2
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	2	<1
Copper	ppm	ASTM D5185m >35	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185m >4	<b>1</b>	2	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>16</b>	13	16
Barium	ppm	ASTM D5185m 5	<b>2</b>	2	2
Molybdenum	ppm	ASTM D5185m 50	<b>55</b>	52	51
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m 560	<b>636</b>	670	513
Calcium	ppm	ASTM D5185m 1510	<b>1772</b>	1339	1560
Phosphorus	ppm	ASTM D5185m 780	<b>813</b>	679	751
Zinc	ppm	ASTM D5185m 870	<b>1063</b>	944	940
Sulfur	ppm	ASTM D5185m 2040	<b>3069</b>	2930	2711

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>5</b>	21	3
Sodium	ppm	ASTM D5185m	<b>5</b>	4	5
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	10.5	10.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	19.7	20.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.1</b>	17.5	17.8
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>7.0</b>	4.3	7.5







# OIL ANALYSIS REPORT

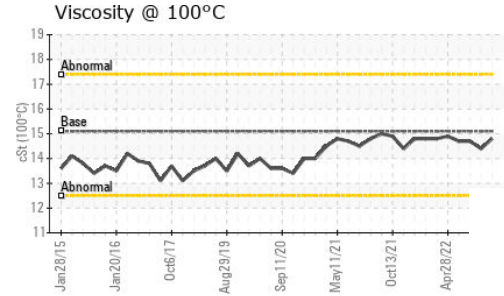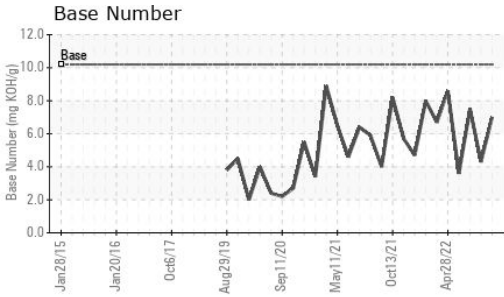

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.8</b>	14.4	14.7

## GRAPHS

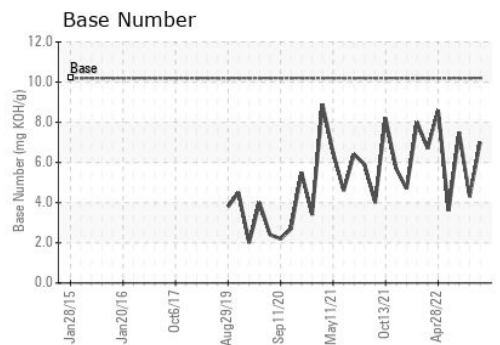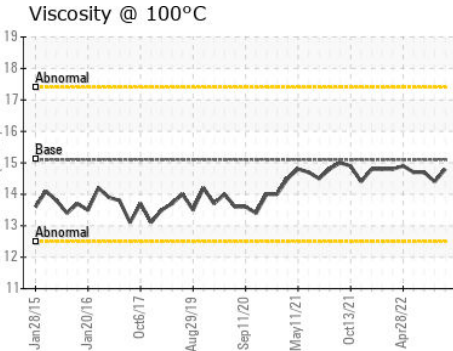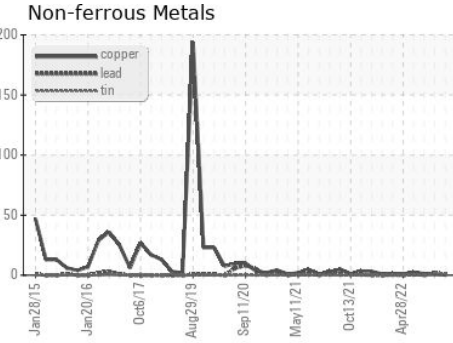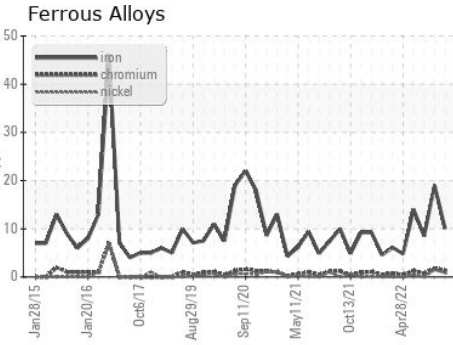

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0088565 **Received** : 17 Jul 2023  
**Lab Number** : **05900652** **Diagnosed** : 18 Jul 2023  
**Unique Number** : 10562008 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 017 - Durham**  
 148 Stone Park Court  
 Durham, NC  
 US 27703  
 Contact: Shane Parks  
 shane.parks@gflenv.com  
 T: (919)596-1363  
 F: (919)598-1852

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)