


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

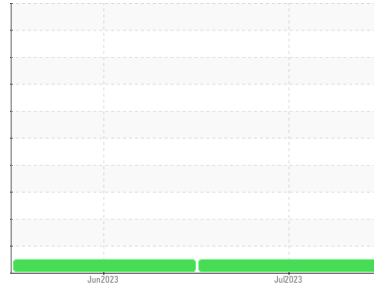

Machine Id  
**VOLVO VNL 156 (S/N 4V4NC9EH4NN304348)**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0097650</b>	PCA0097522	---
Sample Date	Client Info		<b>14 Jul 2023</b>	05 Jun 2023	---
Machine Age	mls	Client Info	<b>242000</b>	215000	---
Oil Age	mls	Client Info	<b>215000</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>19</b>	14	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >25	<b>5</b>	2	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m >330	<b>6</b>	8	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>&lt;1</b>	0	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	68	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 950	<b>1027</b>	964	---
Calcium	ppm	ASTM D5185m 1050	<b>1140</b>	1130	---
Phosphorus	ppm	ASTM D5185m 995	<b>1068</b>	1106	---
Zinc	ppm	ASTM D5185m 1180	<b>1259</b>	1291	---
Sulfur	ppm	ASTM D5185m 2600	<b>3651</b>	3642	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	---
Sodium	ppm	ASTM D5185m	<b>2</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>4</b>	4	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.9</b>	7.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.1</b>	20.0	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.2</b>	17.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.2</b>	7.6	---





# OIL ANALYSIS REPORT

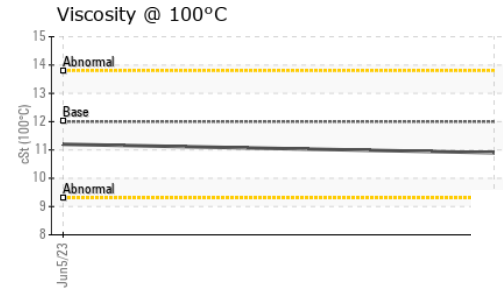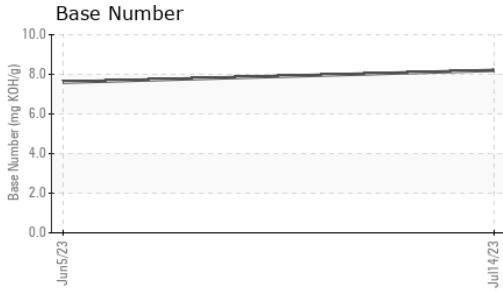

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.9</b>	11.2	---

## GRAPHS

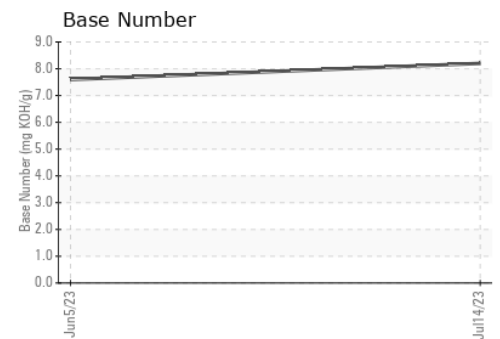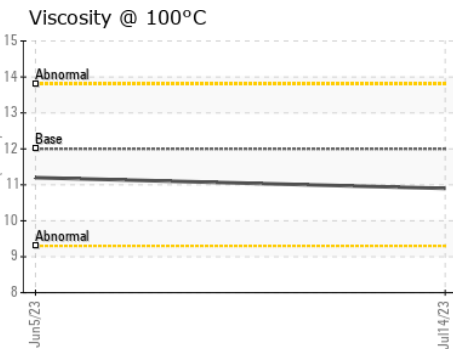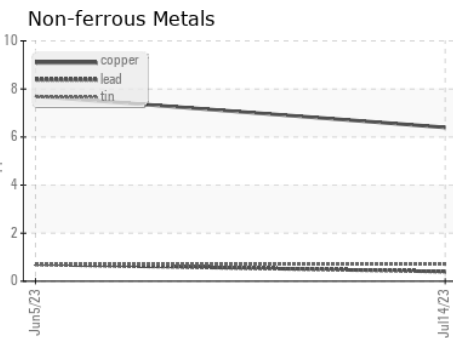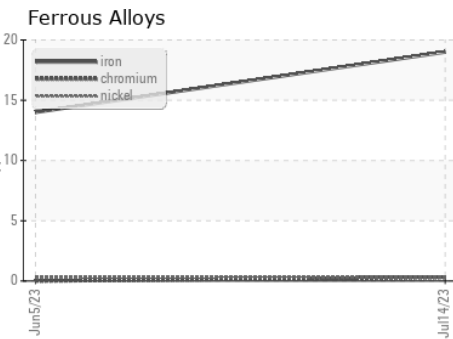

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0097650 **Received** : 24 Jul 2023  
**Lab Number** : **05905107** **Diagnosed** : 24 Jul 2023  
**Unique Number** : 10566463 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**TVA REPAIR LLC**  
 13915 W ROUTE 30  
 PLAINFIELD, IL  
 US 60544

Contact: JOSHUA HUBBARD  
 joshua@tvarepairllc.com  
 T: (815)306-0330  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)