




OIL ANALYSIS REPORT

Sample Rating Trend

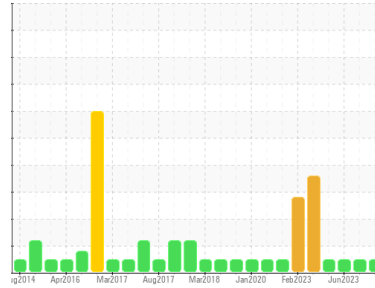

NORMAL



Machine Id
10463

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0083114	GFL0083154	GFL0077419
Sample Date	Client Info	20 Jul 2023	21 Jun 2023	06 Jun 2023
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	Not Chngd	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	56	61	45
Chromium	ppm	ASTM D5185m >20	4	5	4
Nickel	ppm	ASTM D5185m >4	2	2	2
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	0	<1	0
Aluminum	ppm	ASTM D5185m >20	8	14	8
Lead	ppm	ASTM D5185m >40	<1	4	<1
Copper	ppm	ASTM D5185m >330	5	7	3
Tin	ppm	ASTM D5185m >15	<1	2	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	13	8	7
Barium	ppm	ASTM D5185m 0	0	0	2
Molybdenum	ppm	ASTM D5185m 60	61	64	60
Manganese	ppm	ASTM D5185m 0	1	2	<1
Magnesium	ppm	ASTM D5185m 1010	868	957	798
Calcium	ppm	ASTM D5185m 1070	1409	1327	1218
Phosphorus	ppm	ASTM D5185m 1150	973	1005	946
Zinc	ppm	ASTM D5185m 1270	1173	1261	1130
Sulfur	ppm	ASTM D5185m 2060	3326	3417	3071

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	14	17	15
Sodium	ppm	ASTM D5185m	21	25	21
Potassium	ppm	ASTM D5185m >20	<1	3	2

INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.7	1.7	1.2
Nitration	Abs/cm	*ASTM D7624 >20	9.3	10.5	9.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.1	23.2	21.6

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.7	17.7	17.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.2	7.6	8.2







OIL ANALYSIS REPORT

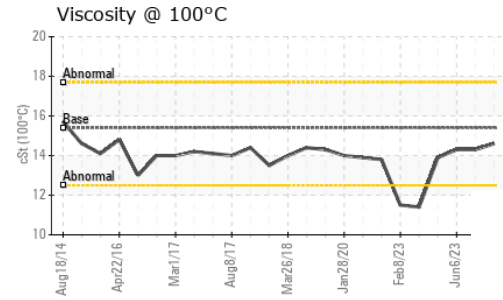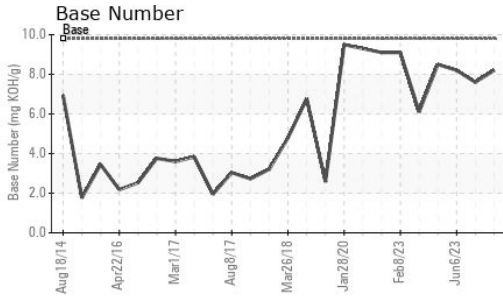

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.6	14.3

GRAPHS

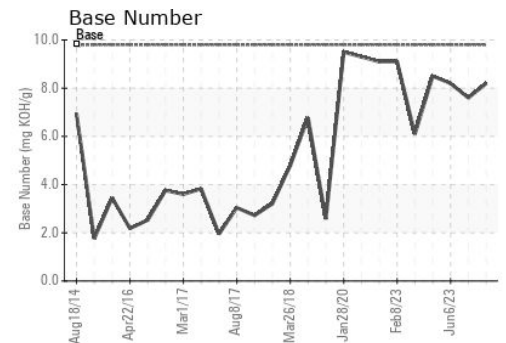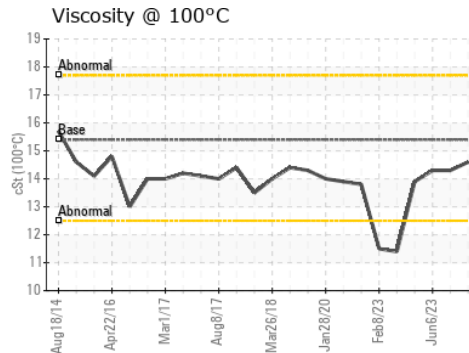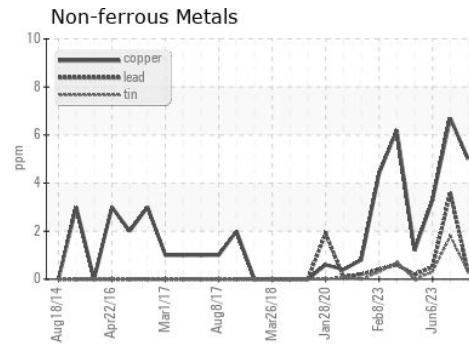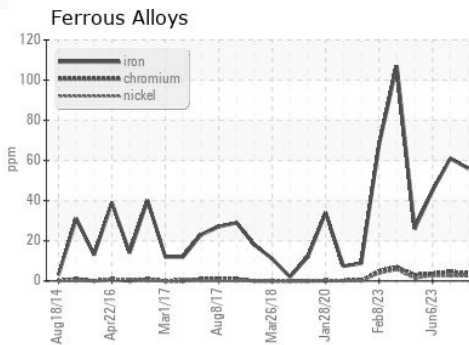

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0083114 **Received** : 24 Jul 2023
Lab Number : 05905172 **Diagnosed** : 24 Jul 2023
Unique Number : 10566528 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 072 - Americus - Transwaste
 361 McMath Mill Road
 Americus, GA
 US 31719
 Contact: RICHARD HEINZERLING
 richard.heinzerling@gflenv.com
 T: (229)924-3669
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)