




# OIL ANALYSIS REPORT

## Sample Rating Trend

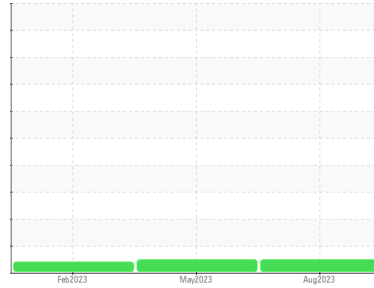

**NORMAL**



Machine Id  
**713021**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0077539</b>	GFL0077529	GFL0060757
Sample Date	Client Info	<b>03 Aug 2023</b>	15 May 2023	23 Feb 2023
Machine Age	hrs	<b>1739</b>	1128	602
Oil Age	hrs	<b>611</b>	526	602
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	ATTENTION

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	0.6
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>17</b>	21	42
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	1	1
Nickel	ppm ASTM D5185m >4	<b>2</b>	6	8
Titanium	ppm ASTM D5185m	<b>0</b>	2	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>1</b>	<1	5
Lead	ppm ASTM D5185m >40	<b>2</b>	2	2
Copper	ppm ASTM D5185m >330	<b>225</b>	177	138
Tin	ppm ASTM D5185m >15	<b>1</b>	2	4
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>2</b>	16	253
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>65</b>	64	104
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	2	6
Magnesium	ppm ASTM D5185m 1010	<b>985</b>	974	670
Calcium	ppm ASTM D5185m 1070	<b>1179</b>	1169	1529
Phosphorus	ppm ASTM D5185m 1150	<b>993</b>	983	623
Zinc	ppm ASTM D5185m 1270	<b>1228</b>	1239	816
Sulfur	ppm ASTM D5185m 2060	<b>2987</b>	3187	2523

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	10	56
Sodium	ppm ASTM D5185m	<b>4</b>	4	2
Potassium	ppm ASTM D5185m >20	<b>0</b>	3	6

### INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.6</b>	0.5	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>7.8</b>	8.3	9.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.6</b>	20.3	24.1

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.4</b>	15.7	20.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.9</b>	7.3	7.7







# OIL ANALYSIS REPORT

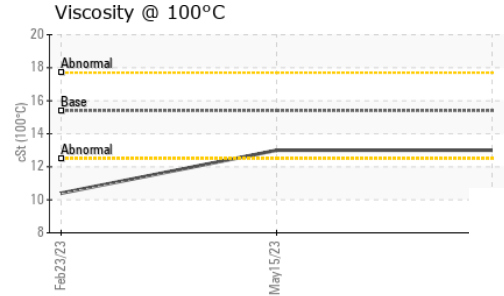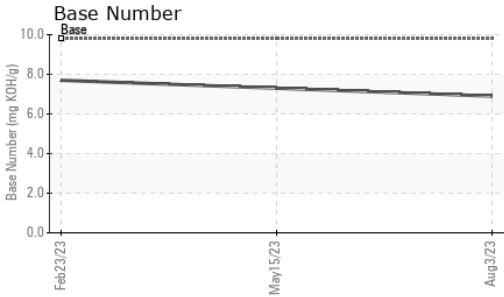

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.0	▲ 10.4

## GRAPHS

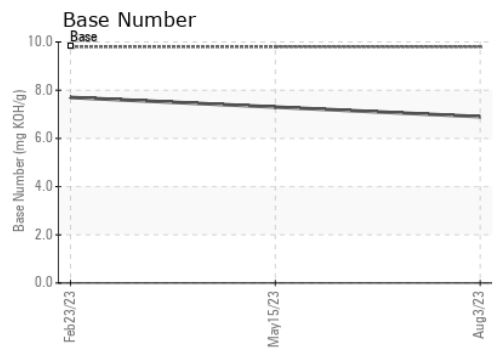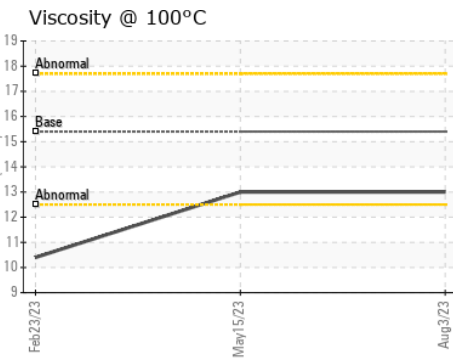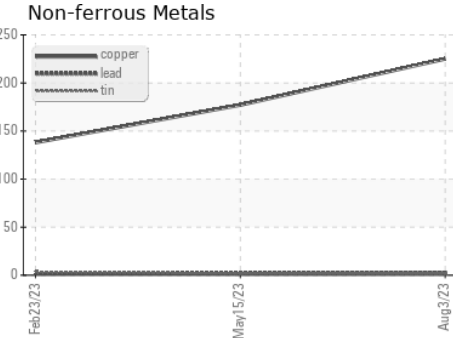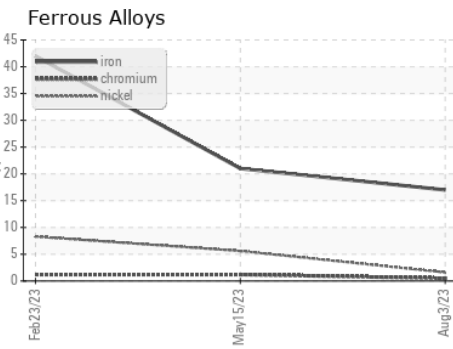

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0077539 **Received** : 08 Aug 2023  
**Lab Number** : **05919136** **Diagnosed** : 09 Aug 2023  
**Unique Number** : 10591050 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 625 - Harrison Hauling**  
 4102 Industrial Pkwy  
 Harrison, MI  
 US 48625  
 Contact: Glenda Standen  
 gstanden@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)