


PROBLEM SUMMARY


Area
(43495PC) Feldman Lumber
 Machine Id
[Feldman Lumber] 196D245
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

Sample Rating Trend

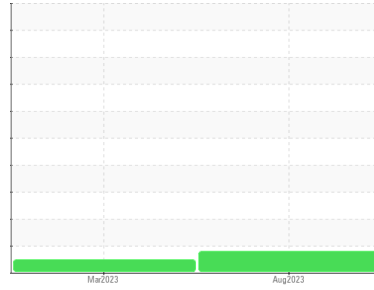

COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

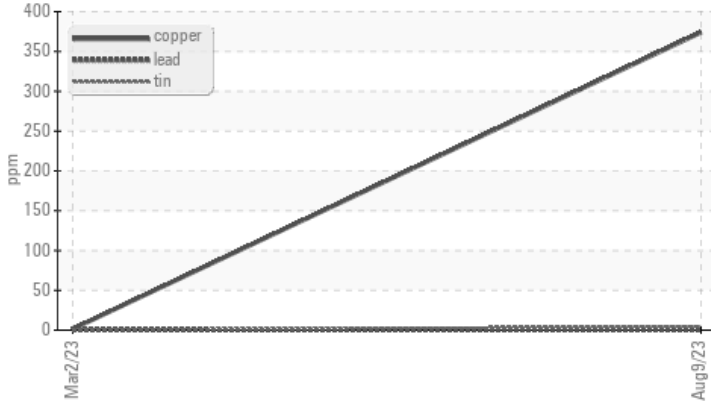

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL	NORMAL	---
Copper	▲ 374	1	---

Customer Id: TSV1960
 Sample No.: PCA0098293
 Lab Number: 05922638
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

02 Mar 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

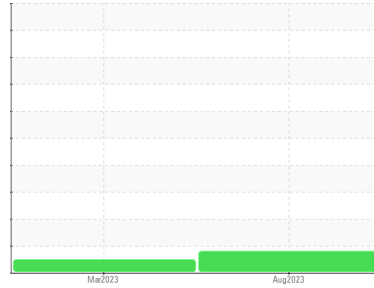

WEAR



Area
(43495PC) Feldman Lumber
 Machine Id
[Feldman Lumber] 196D245
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0098293	PCA0091118	---
Sample Date	Client Info		09 Aug 2023	02 Mar 2023	---
Machine Age	mls	Client Info	106007	101925	---
Oil Age	mls	Client Info	4082	4055	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	13	14	---
Chromium	ppm	ASTM D5185m >5	<1	<1	---
Nickel	ppm	ASTM D5185m >2	<1	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m >3	<1	0	---
Aluminum	ppm	ASTM D5185m >30	7	4	---
Lead	ppm	ASTM D5185m >30	<1	0	---
Copper	ppm	ASTM D5185m >150	▲ 374	1	---
Tin	ppm	ASTM D5185m >5	4	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	13	28	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 50	62	56	---
Manganese	ppm	ASTM D5185m 0	1	<1	---
Magnesium	ppm	ASTM D5185m 950	905	805	---
Calcium	ppm	ASTM D5185m 1050	1104	1129	---
Phosphorus	ppm	ASTM D5185m 995	1015	925	---
Zinc	ppm	ASTM D5185m 1180	1239	1106	---
Sulfur	ppm	ASTM D5185m 2600	3621	2900	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	3	7	---
Sodium	ppm	ASTM D5185m	2	0	---
Potassium	ppm	ASTM D5185m >20	10	4	---




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.4	---
Nitration	Abs/cm	*ASTM D7624 >20	7.3	7.9	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.5	18.5	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.8	13.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.1	9.3	---





OIL ANALYSIS REPORT

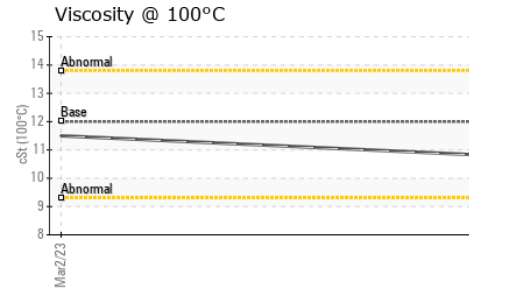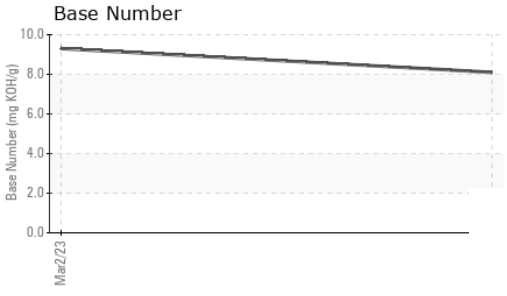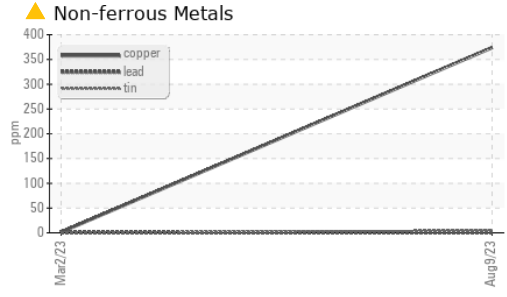

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	11.5

GRAPHS

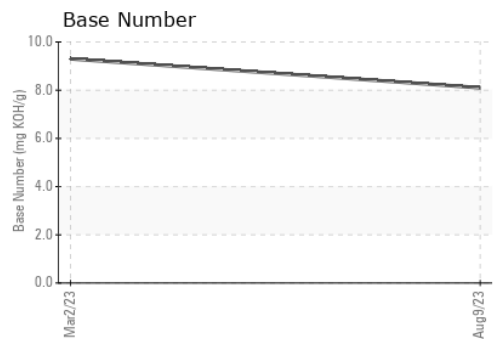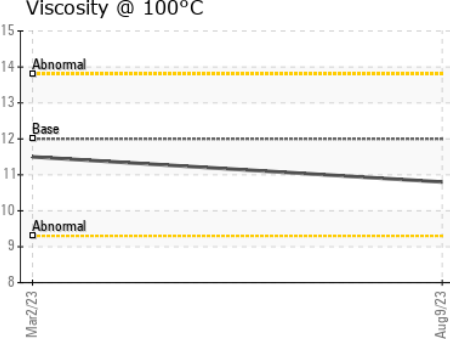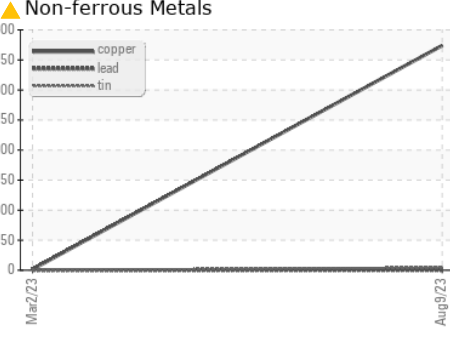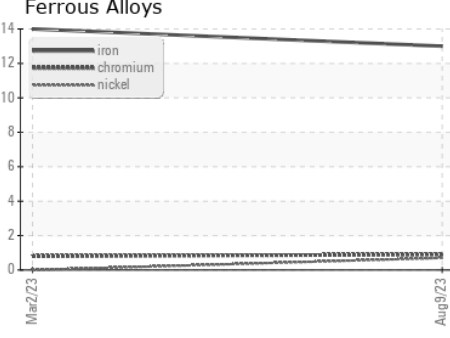

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0098293
Lab Number : 05922638
Unique Number : 10602585
Test Package : FLEET

Transervice - Shop 1960 - Feldman Lumber Service
 1281 Metropolitan Avenue
 Brooklyn, NY
 US 11237
 Contact: Marc Fried
 mfried@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)