


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

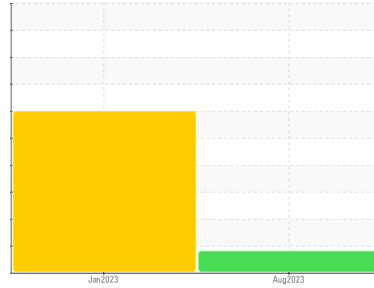

Machine Id
736801

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

▲ Wear

The iron level has decreased, but is still abnormal. Cylinder, crank, or cam shaft wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0103088	PCA0089672	---
Sample Date	Client Info			05 Aug 2023	25 Jan 2023	---
Machine Age	mls	Client Info		122464	76810	---
Oil Age	mls	Client Info		0	0	---
Oil Changed	Client Info			Not Chngd	N/A	---
Sample Status				ABNORMAL	SEVERE	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	▲ 218	405	---
Chromium	ppm	ASTM D5185m	>20	4	7	---
Nickel	ppm	ASTM D5185m	>4	<1	3	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	24	51	---
Lead	ppm	ASTM D5185m	>40	<1	4	---
Copper	ppm	ASTM D5185m	>330	73	297	---
Tin	ppm	ASTM D5185m	>15	3	11	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	6	19	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	50	63	49	---
Manganese	ppm	ASTM D5185m	0	4	10	---
Magnesium	ppm	ASTM D5185m	950	862	499	---
Calcium	ppm	ASTM D5185m	1050	1410	1884	---
Phosphorus	ppm	ASTM D5185m	995	936	747	---
Zinc	ppm	ASTM D5185m	1180	1232	928	---
Sulfur	ppm	ASTM D5185m	2600	2485	1914	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	8	12	---
Sodium	ppm	ASTM D5185m		5	8	---
Potassium	ppm	ASTM D5185m	>20	45	121	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	2.2	2.6	---
Nitration	Abs/cm	*ASTM D7624	>20	17.0	22.6	---
Sulfation	Abs.1mm	*ASTM D7415	>30	29.2	33.9	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs.1mm	*ASTM D7414	>25	33.4	45.7	---
Base Number (BN)	mg KOH/g	ASTM D2896		3.9	2.9	---









OIL ANALYSIS REPORT

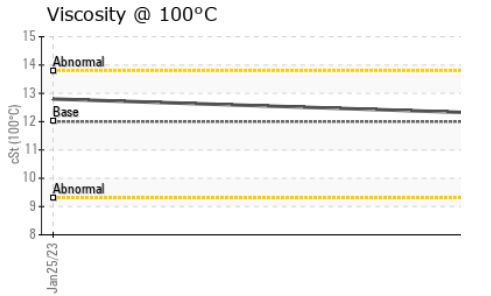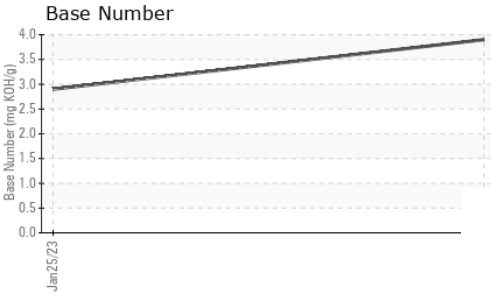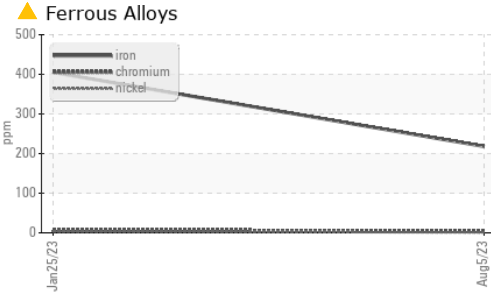

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.3	12.8

GRAPHS

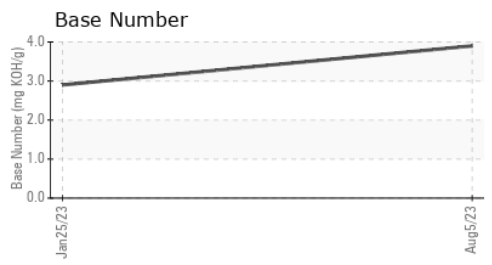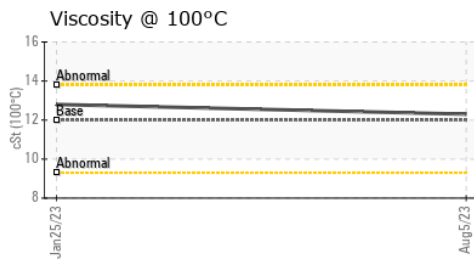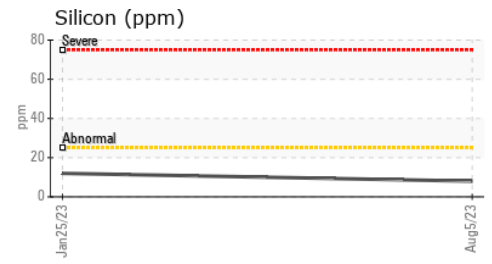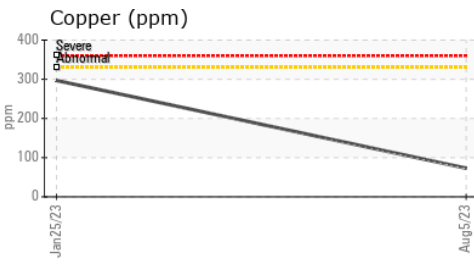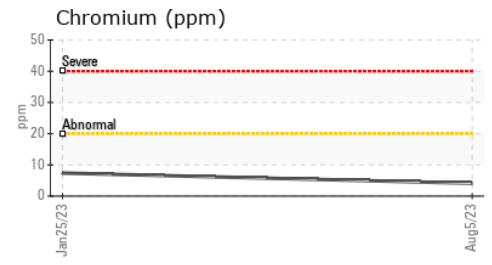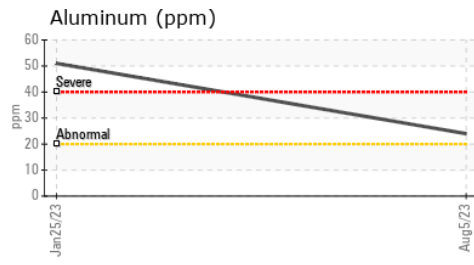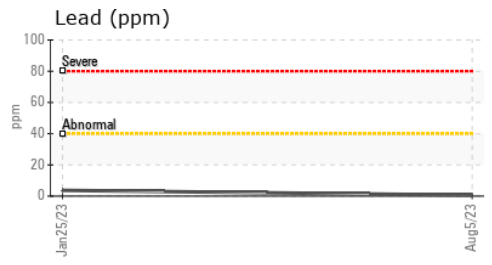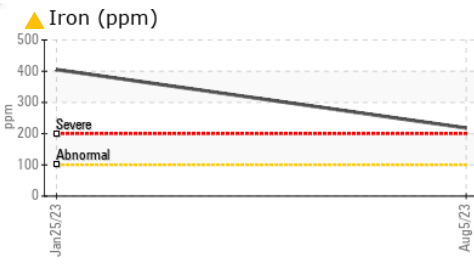

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0103088 **Received** : 16 Aug 2023
Lab Number : **05925732** **Diagnosed** : 17 Aug 2023
Unique Number : 10605679 **Diagnostician** : Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #119
 39 INDUSTRIAL AVE
 HASBROUCK HEIGHTS, NJ
 US 07604
 Contact: MIKE LONGETTE
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (201)528-7053