


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

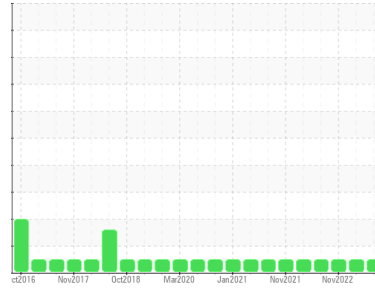

Area  
**FLEET**  
 Machine Id  
**26375**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0099755</b>	PCA0094137	PCA0084905
Sample Date	Client Info		<b>04 Jun 2023</b>	01 Mar 2023	20 Nov 2022
Machine Age	mls	Client Info	<b>441977</b>	0	400188
Oil Age	mls	Client Info	<b>441977</b>	20000	38948
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>35</b>	16	48
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>8</b>	9	24
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	2	5
Lead	ppm	ASTM D5185m >40	<b>2</b>	0	2
Copper	ppm	ASTM D5185m >330	<b>3</b>	<1	5
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>&lt;1</b>	3	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>56</b>	49	45
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>851</b>	832	750
Calcium	ppm	ASTM D5185m 1050	<b>1245</b>	1236	1343
Phosphorus	ppm	ASTM D5185m 995	<b>1024</b>	949	942
Zinc	ppm	ASTM D5185m 1180	<b>1223</b>	1214	1167
Sulfur	ppm	ASTM D5185m 2600	<b>3103</b>	3371	3502

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	6
Sodium	ppm	ASTM D5185m	<b>15</b>	6	21
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	1



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.4	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.4</b>	9.8	12.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.2</b>	20.1	25.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.2</b>	16.5	21.3
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.7</b>	6.9	4.8





# OIL ANALYSIS REPORT

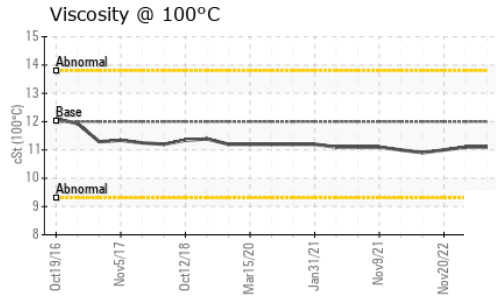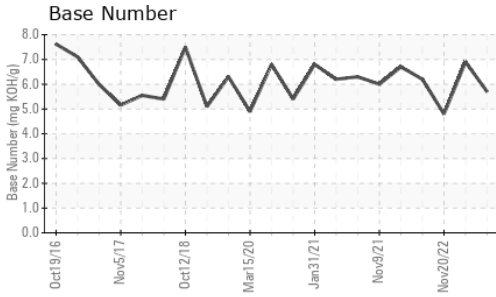

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.1</b>	11.1	11.0

## GRAPHS

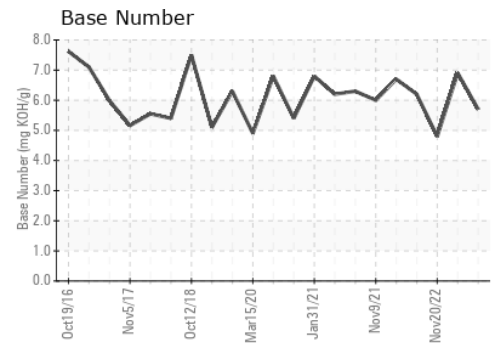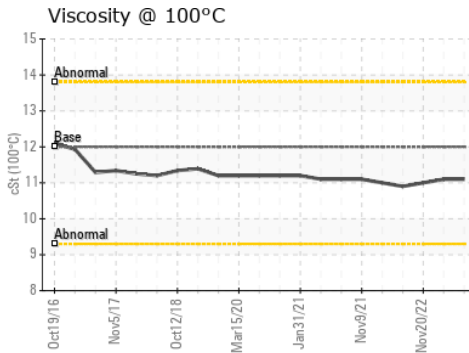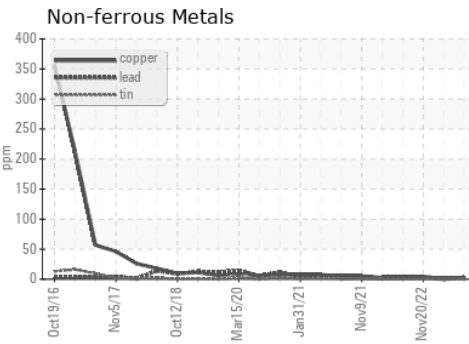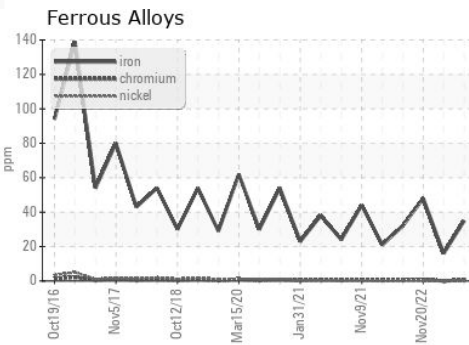

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0099755 **Received** : 22 Aug 2023  
**Lab Number** : **05930708** **Diagnosed** : 22 Aug 2023  
**Unique Number** : 10615979 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: