


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

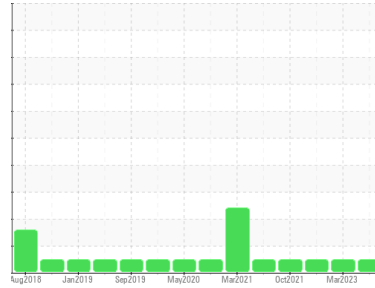

Machine Id  
**26509**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (34 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0099762</b>	PCA0093703	PCA0070822
Sample Date	Client Info		<b>29 May 2023</b>	20 Mar 2023	28 Apr 2022
Machine Age	mls	Client Info	<b>0</b>	426901	404583
Oil Age	mls	Client Info	<b>20000</b>	40000	20105
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>39</b>	95	39
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m	<b>5</b>	27	30
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >25	<b>7</b>	19	9
Lead	ppm	ASTM D5185m >40	<b>2</b>	5	1
Copper	ppm	ASTM D5185m >330	<b>6</b>	25	7
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	5	20
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>57</b>	41	35
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m 950	<b>882</b>	737	679
Calcium	ppm	ASTM D5185m 1050	<b>1171</b>	1321	1339
Phosphorus	ppm	ASTM D5185m 995	<b>994</b>	935	962
Zinc	ppm	ASTM D5185m 1180	<b>1206</b>	1202	1229
Sulfur	ppm	ASTM D5185m 2600	<b>2967</b>	3621	3065

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	12	7
Sodium	ppm	ASTM D5185m	<b>13</b>	19	7
Potassium	ppm	ASTM D5185m >20	<b>6</b>	17	8



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	1	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.7</b>	12.2	10.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.7</b>	25.9	22.2

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.1</b>	20.4	17.4
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.7</b>	4.2	6.7





# OIL ANALYSIS REPORT

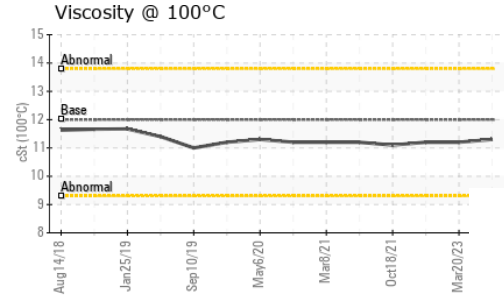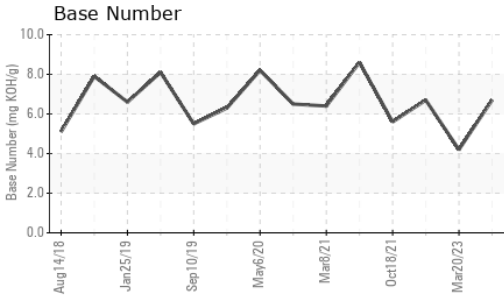

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.3</b>	11.2	11.2

## GRAPHS

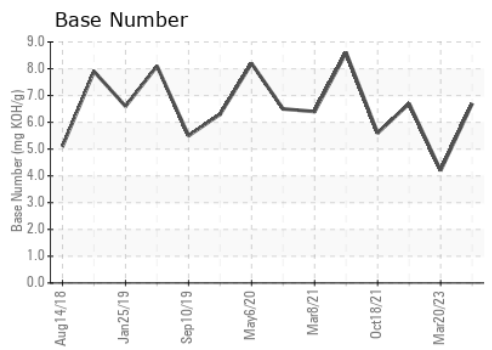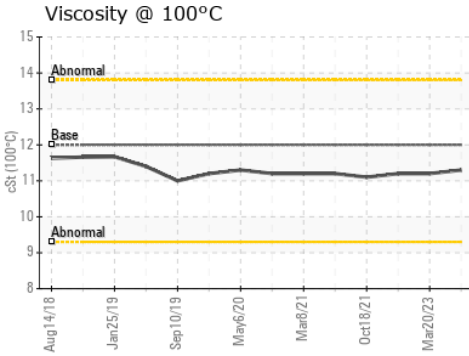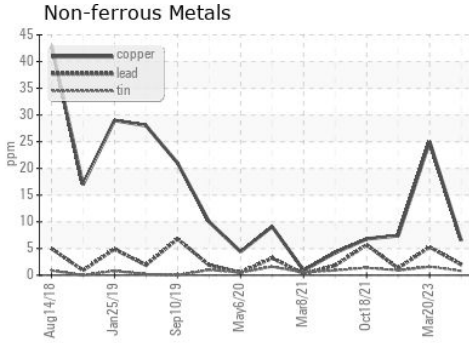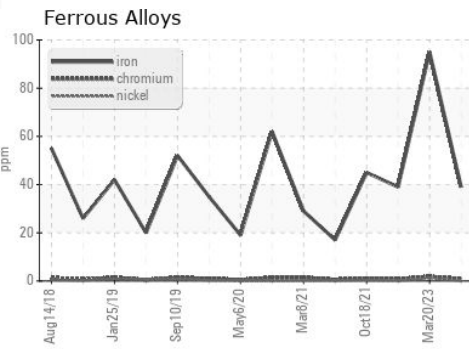

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0099762 **Received** : 22 Aug 2023  
**Lab Number** : **05930710** **Diagnosed** : 22 Aug 2023  
**Unique Number** : 10615981 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)