


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

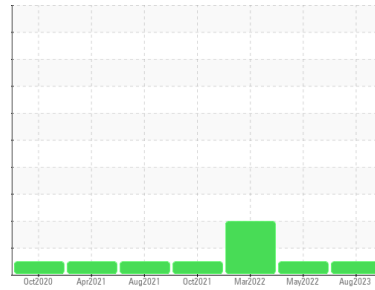

Area
PROCESS CHEESE [98421918]
 Machine Id
640 BLOCK DUMPER
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0100114	PCA0067379	PCA0066916
Sample Date	Client Info	16 Aug 2023	03 May 2022	17 Mar 2022
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	Filtered	Filtered	Filtered
Sample Status		NORMAL	NORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	0
Chromium	ppm	ASTM D5185m >20	<1	0
Nickel	ppm	ASTM D5185m >20	0	0
Titanium	ppm	ASTM D5185m	<1	0
Silver	ppm	ASTM D5185m	0	<1
Aluminum	ppm	ASTM D5185m >20	0	0
Lead	ppm	ASTM D5185m >20	<1	<1
Copper	ppm	ASTM D5185m >20	<1	0
Tin	ppm	ASTM D5185m >20	<1	0
Antimony	ppm	ASTM D5185m	---	---
Vanadium	ppm	ASTM D5185m	<1	0
Cadmium	ppm	ASTM D5185m	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	0	2
Barium	ppm	ASTM D5185m 5	0	0
Molybdenum	ppm	ASTM D5185m 5	0	0
Manganese	ppm	ASTM D5185m	<1	0
Magnesium	ppm	ASTM D5185m 25	6	0
Calcium	ppm	ASTM D5185m 200	0	0
Phosphorus	ppm	ASTM D5185m 300	625	634
Zinc	ppm	ASTM D5185m 370	14	0
Sulfur	ppm	ASTM D5185m 2500	1874	1357

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	2	1
Sodium	ppm	ASTM D5185m	1	0
Potassium	ppm	ASTM D5185m >20	2	1





FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >1300	133	204	▲ 19495
Particles >6µm	ASTM D7647 >320	51	65	▲ 4409
Particles >14µm	ASTM D7647 >80	8	10	▲ 414
Particles >21µm	ASTM D7647 >20	2	3	▲ 119
Particles >38µm	ASTM D7647 >4	0	0	▲ 5
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >17/15/13	14/13/10	15/13/10	▲ 21/19/16

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.26	0.27


OIL ANALYSIS REPORT

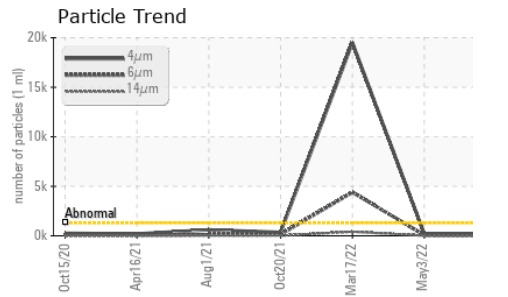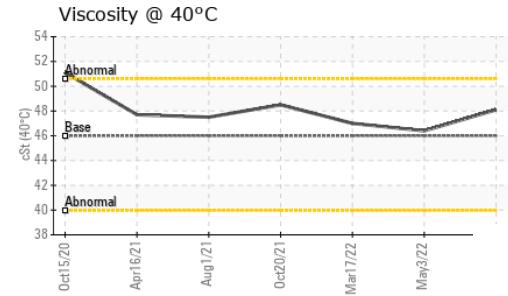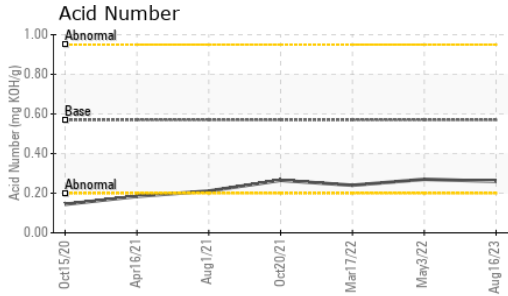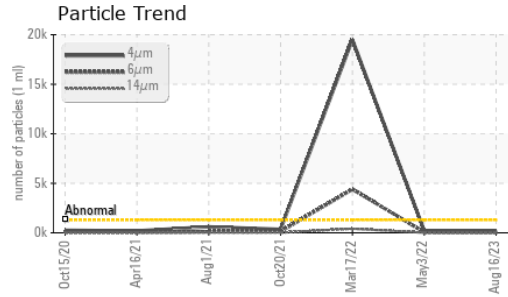






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	48.1	46.4	47.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

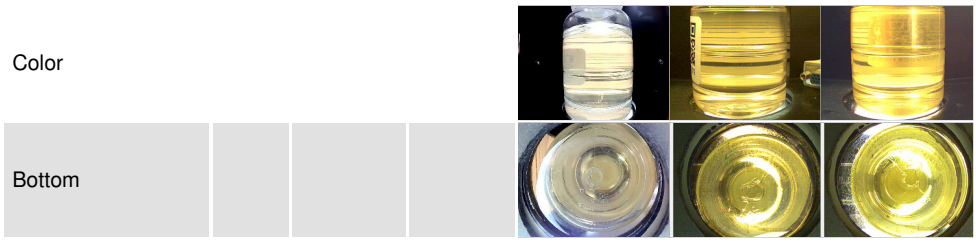

GRAPHS

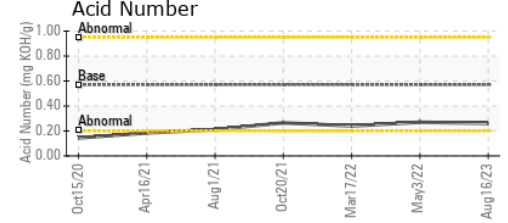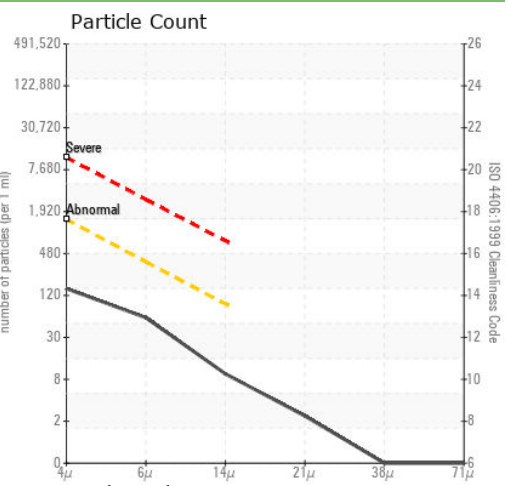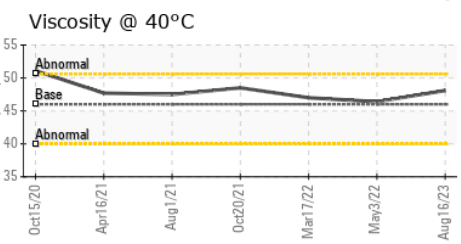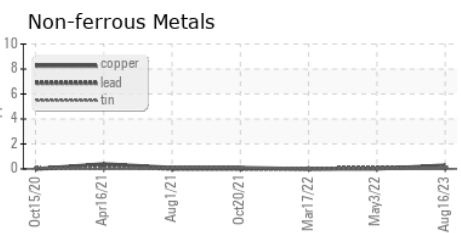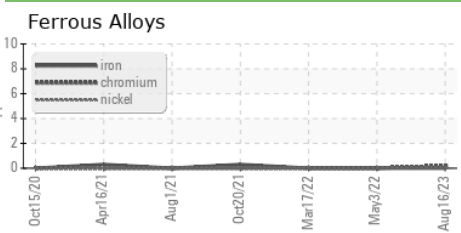

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0100114 **Received** : 29 Aug 2023
Lab Number : **05937206** **Diagnosed** : 30 Aug 2023
Unique Number : 10622477 **Diagnostician** : Don Baldrige
Test Package : IND 2

KraftHeinz - Springfield - Plant 8311 PCA
 2035 E BENNETT
 SPRINGFIELD, MO
 US 65804
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)