




# OIL ANALYSIS REPORT

Sample Rating Trend

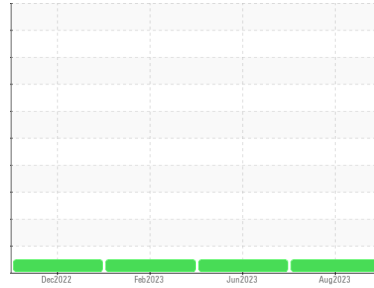

**NORMAL**



Machine Id  
**927054**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0089494</b>	GFL0078774	GFL0071462
Sample Date	Client Info		<b>10 Aug 2023</b>	04 Jun 2023	07 Feb 2023
Machine Age	hrs	Client Info	<b>14567</b>	1419	13527
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>16</b>	19	31
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	1	4
Lead	ppm	ASTM D5185m >45	<b>0</b>	1	2
Copper	ppm	ASTM D5185m >85	<b>2</b>	1	3
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	3	5
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	61	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>1050</b>	1021	959
Calcium	ppm	ASTM D5185m 1070	<b>1144</b>	1105	1141
Phosphorus	ppm	ASTM D5185m 1150	<b>1096</b>	1063	976
Zinc	ppm	ASTM D5185m 1270	<b>1375</b>	1347	1212
Sulfur	ppm	ASTM D5185m 2060	<b>3811</b>	3746	3099

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>4</b>	4	5
Sodium	ppm	ASTM D5185m	<b>5</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>3</b>	2	8

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.5	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.3</b>	8.4	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.8</b>	20.3	20.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.9</b>	16.3	16.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.5</b>	8.8	9.4







# OIL ANALYSIS REPORT

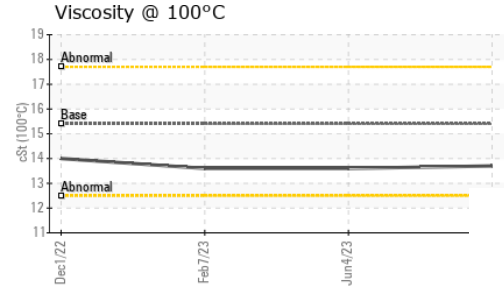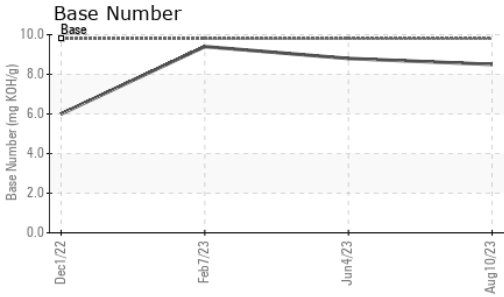

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.6	13.6

## GRAPHS

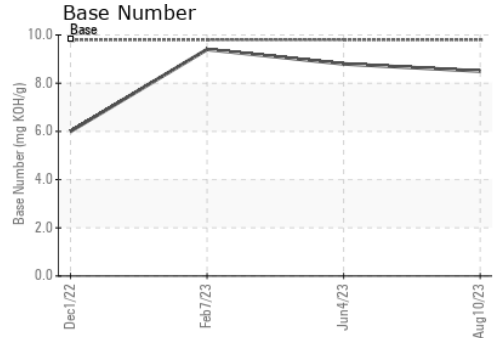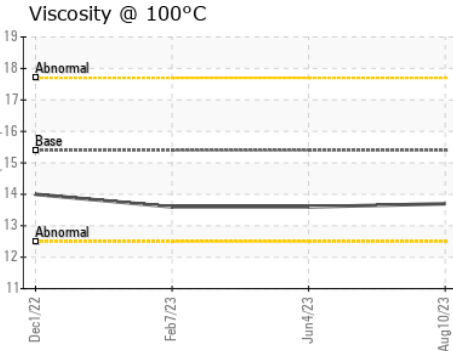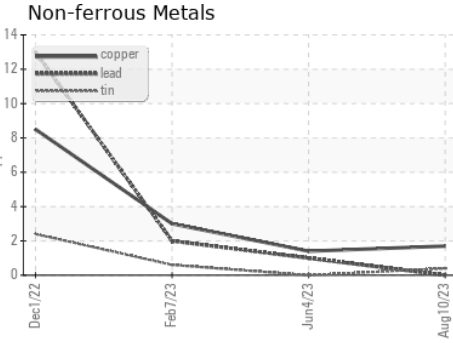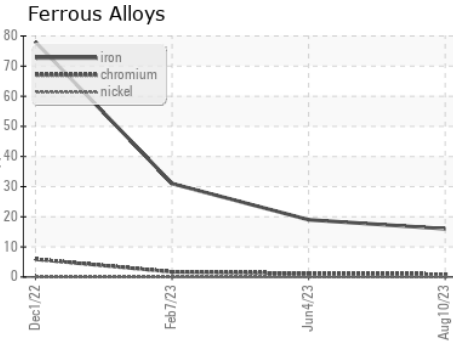

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0089494 **Received** : 05 Sep 2023  
**Lab Number** : **05941885** **Diagnosed** : 06 Sep 2023  
**Unique Number** : 10632497 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 918 - Hartland HC**  
 630 E Industrial Drive  
 Hartland, WI  
 US 53029  
 Contact: David McCall  
 david.mccall@gflenv.com  
 T: (262)369-3069  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)