




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

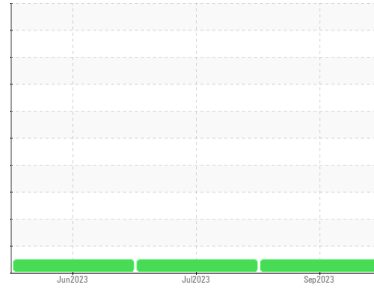

Area  
**{UNASSIGNED}**  
Machine Id  
**933041**  
Component  
**Natural Gas Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0091367</b>	GFL0086127	GFL0083231
Sample Date	Client Info		<b>01 Sep 2023</b>	06 Jul 2023	15 Jun 2023
Machine Age	hrs	Client Info	<b>716</b>	391	216
Oil Age	hrs	Client Info	<b>716</b>	391	216
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>70</b>	63	53
Chromium	ppm	ASTM D5185m >4	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>2</b>	1	1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >9	<b>20</b>	20	9
Lead	ppm	ASTM D5185m >30	<b>2</b>	1	1
Copper	ppm	ASTM D5185m >35	<b>15</b>	18	18
Tin	ppm	ASTM D5185m >4	<b>1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>8</b>	18	27
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	5
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	52	50
Manganese	ppm	ASTM D5185m 0	<b>11</b>	13	12
Magnesium	ppm	ASTM D5185m 1010	<b>803</b>	785	693
Calcium	ppm	ASTM D5185m 1070	<b>1086</b>	990	939
Phosphorus	ppm	ASTM D5185m 1150	<b>740</b>	715	701
Zinc	ppm	ASTM D5185m 1270	<b>985</b>	929	866
Sulfur	ppm	ASTM D5185m 2060	<b>2727</b>	2831	2520

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>28</b>	35	32
Sodium	ppm	ASTM D5185m	<b>5</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>66</b>	58	32

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.5</b>	11.4	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.0</b>	21.8	20.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.7</b>	20.4	18.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>3.9</b>	5.2	6.9







# OIL ANALYSIS REPORT

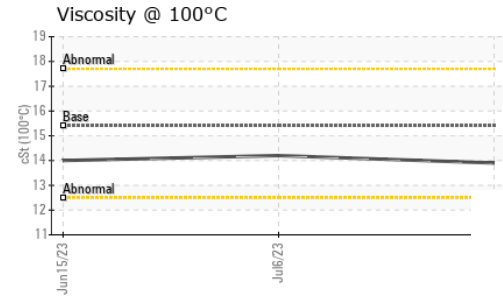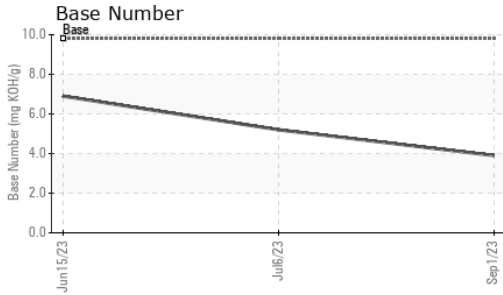

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	14.2	14.0

## GRAPHS

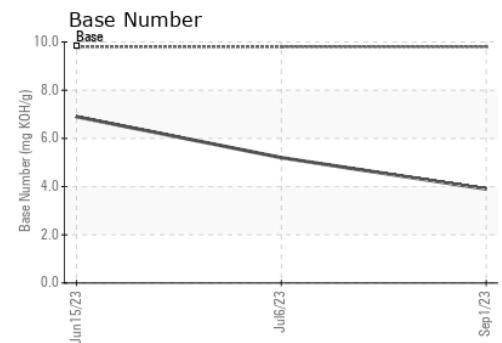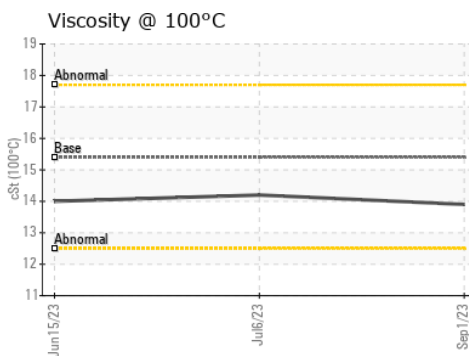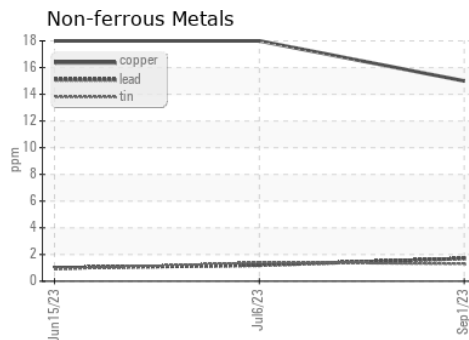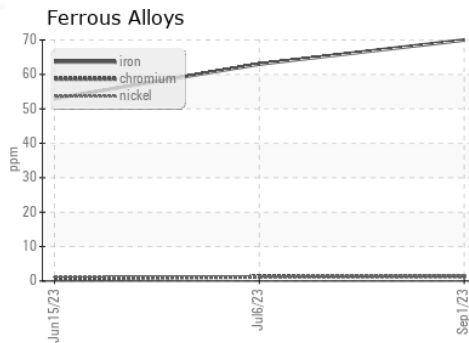

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091367 **Received** : 06 Sep 2023  
**Lab Number** : **05943275** **Diagnosed** : 07 Sep 2023  
**Unique Number** : 10633887 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: