




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

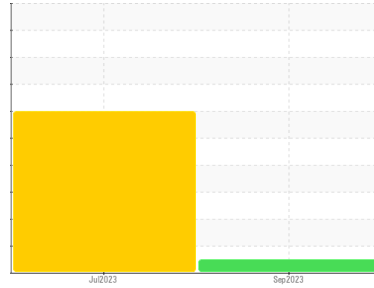

Machine Id  
**913119**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (28 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0091724</b>	GFL0083999	---
Sample Date	Client Info		<b>11 Sep 2023</b>	28 Jul 2023	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	600	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	SEVERE	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	0.4	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>12</b>	49	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m >5	<b>2</b>	▲ 10	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	2	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	4	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m >330	<b>19</b>	113	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	3	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>16</b>	197	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	122	---
Manganese	ppm	ASTM D5185m 0	<b>1</b>	5	---
Magnesium	ppm	ASTM D5185m 1010	<b>1016</b>	661	---
Calcium	ppm	ASTM D5185m 1070	<b>1206</b>	1454	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1019</b>	726	---
Zinc	ppm	ASTM D5185m 1270	<b>1286</b>	893	---
Sulfur	ppm	ASTM D5185m 2060	<b>3678</b>	2297	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>13</b>	◆ 95	---
Sodium	ppm	ASTM D5185m	<b>1</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	11	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.3</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.5</b>	10.2	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.5</b>	23.2	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.4</b>	21.9	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.7</b>	7.2	---







# OIL ANALYSIS REPORT

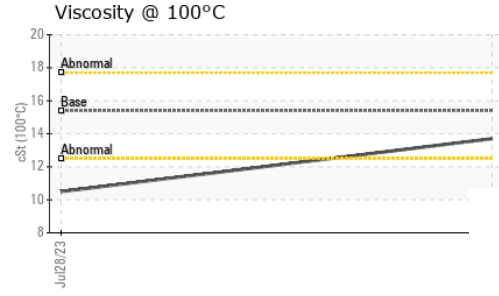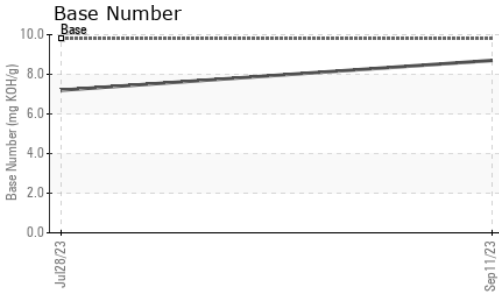

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	▲ 10.5

## GRAPHS

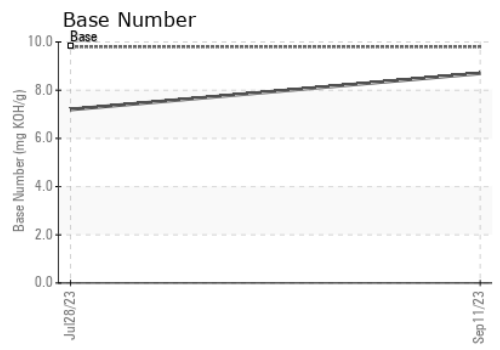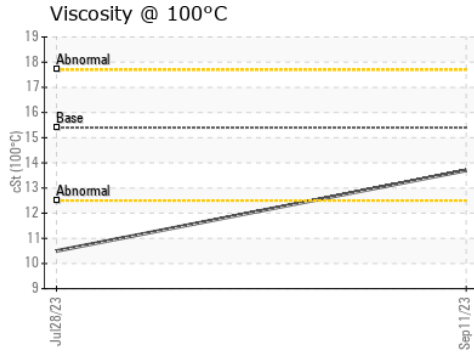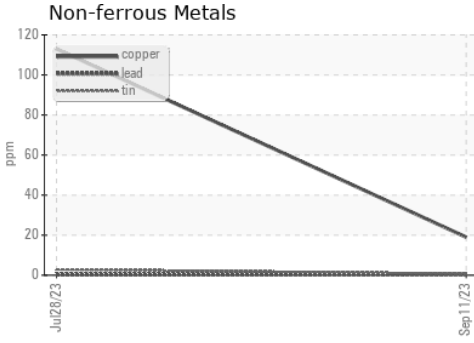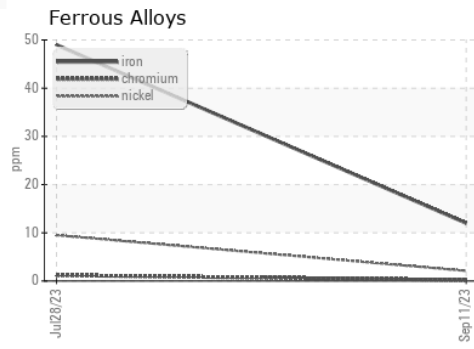

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091724 **Received** : 14 Sep 2023  
**Lab Number** : 05951082 **Diagnosed** : 16 Sep 2023  
**Unique Number** : 10647041 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 401 - Fort Wayne Hauling**  
 4429 ALLEN MARTIN DR  
 FORT WAYNE, IN  
 US 46806  
 Contact: Stephanie Burton  
 stephanieburton@gflenv.com  
 T: (260)747-5037  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)