	PROBLEM SUMMARY	Sample Rating Trend	VIS DEBRIS
EXPERISE			
Machine Id 2026825			
Component Front Differential Fluid			
NOT GIVEN (QTS)		Sep2023	
COMPONENT CONDIT	ION SUMMARY		

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC	C TEST	RESULT	S		
Sample Status				ABNORMAL	
Debris	scalar	*Visual	NONE	A MODER	

Customer Id: PERLEWNC Sample No.: PCA0101096 Lab Number: 05951779 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **2026825** Component Front Differential Fluid NOT GIVEN (--- QTS)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0101096		
Sample Date		Client Info		11 Sep 2023		
Machine Age	mls	Client Info		280282		
Oil Age	mls	Client Info		280282		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	162		
Chromium	ppm	ASTM D5185m	>10	2		
Nickel	ppm	ASTM D5185m	>10	5		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	4		
Lead	ppm	ASTM D5185m	>25	<1		
Copper	ppm	ASTM D5185m	>100	28		
Tin	ppm	ASTM D5185m	>10	2		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		273		
Barium	ppm	ASTM D5185m		2		
Volybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		11		
Magnesium	ppm	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		16		
Phosphorus	ppm	ASTM D5185m		1442		
Zinc	ppm	ASTM D5185m		21		
Sulfur	ppm	ASTM D5185m		28705		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	53		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	2		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	MODER		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE			
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPER	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		104		
:13:51) Bev: 1			Conta	ct/Location: NEL	SON WALLACE	

Report Id: PERLEWNC [WUSCAR] 05951779 (Generated: 09/20/2023 06:13:51) Rev: 1

Contact/Location: NELSON WALLACE - PERLEWNC



OIL ANALYSIS REPORT

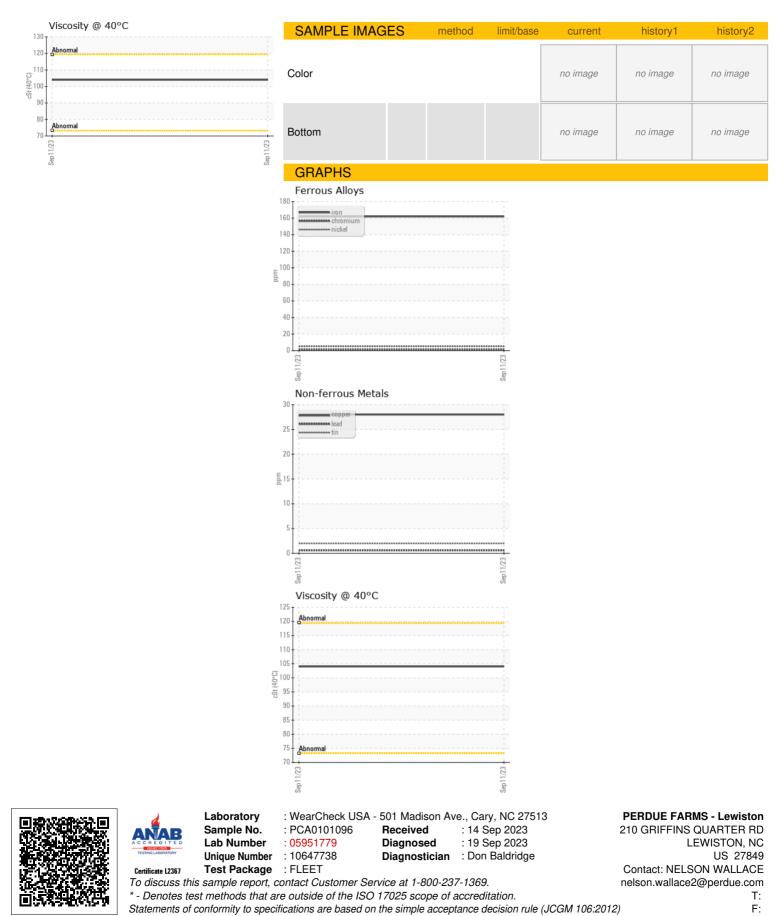

Contact/Location: NELSON WALLACE - PERLEWNC