




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

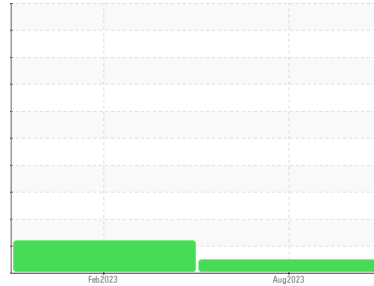

Machine Id  
**213005**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0071291</b>	GFL0065053	---
Sample Date	Client Info		<b>30 Aug 2023</b>	13 Feb 2023	---
Machine Age	hrs	Client Info	<b>1696</b>	698	---
Oil Age	hrs	Client Info	<b>1696</b>	698	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>NORMAL</b>	ATTENTION	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	▲ 2.7	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>11</b>	90	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	1	---
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	9	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>2</b>	46	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	43	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	42	---
Manganese	ppm	ASTM D5185m 0	<b>1</b>	10	---
Magnesium	ppm	ASTM D5185m 1010	<b>965</b>	539	---
Calcium	ppm	ASTM D5185m 1070	<b>1059</b>	1650	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1030</b>	701	---
Zinc	ppm	ASTM D5185m 1270	<b>1244</b>	913	---
Sulfur	ppm	ASTM D5185m 2060	<b>3636</b>	2260	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	24	---
Sodium	ppm	ASTM D5185m	<b>3</b>	6	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	13	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.4</b>	10.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.9</b>	22.4	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.6</b>	23.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.7</b>	8.2	---







# OIL ANALYSIS REPORT

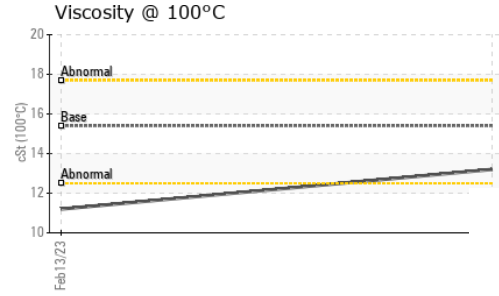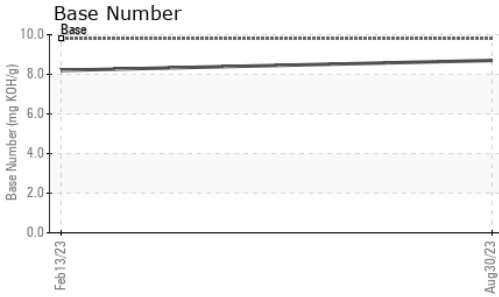

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	▲ 11.2

## GRAPHS

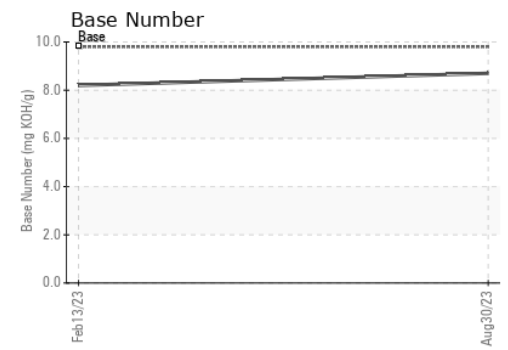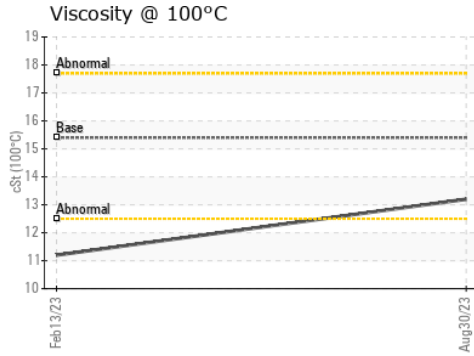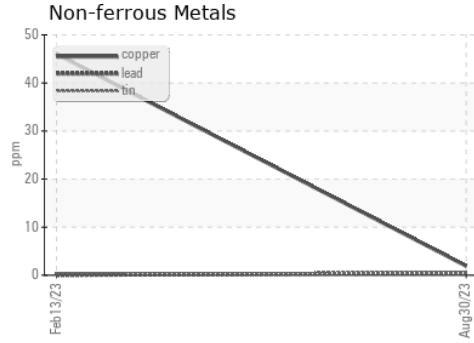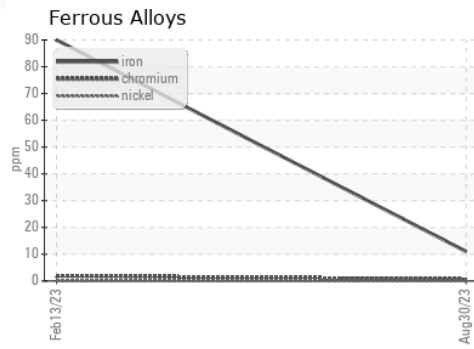

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0071291 **Received** : 21 Sep 2023  
**Lab Number** : 05957516 **Diagnosed** : 22 Sep 2023  
**Unique Number** : 10658729 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 932 - Muskego HC**  
 W144 S6400 College Ct.  
 Muskego, WI  
 US 53150  
 Contact: Brian Schlomann  
 brian.schlomann@gflenv.com  
 T: (262)510-4586  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)