


OIL ANALYSIS REPORT



Area
G.LOPES CONSTRUCTION INC./Off-Road
Machine Id
E-703
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

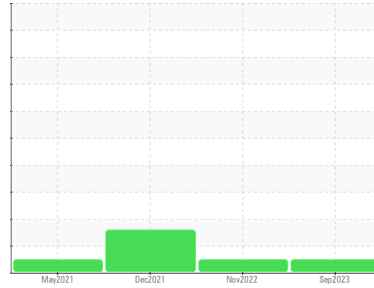

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0104758	PCA0078180	PCA0041218
Sample Date	Client Info		27 Sep 2023	01 Nov 2022	21 Dec 2021
Machine Age	hrs	Client Info	8480	8416	7399
Oil Age	hrs	Client Info	7095	7095	304
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	76	96	24
Chromium	ppm	ASTM D5185m >20	<1	2	1
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m >2	0	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >25	6	3	2
Lead	ppm	ASTM D5185m >40	2	5	3
Copper	ppm	ASTM D5185m >330	9	8	6
Tin	ppm	ASTM D5185m >15	<1	2	1
Antimony	ppm	ASTM D5185m	---	---	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	3	3	5
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	65	63	60
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	1037	967	963
Calcium	ppm	ASTM D5185m 1070	1175	1135	1125
Phosphorus	ppm	ASTM D5185m 1150	1074	1035	1057
Zinc	ppm	ASTM D5185m 1270	1354	1256	1228
Sulfur	ppm	ASTM D5185m 2060	3148	3501	2664

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	9	▲ 26
Sodium	ppm	ASTM D5185m	14	44	29
Potassium	ppm	ASTM D5185m >20	10	38	3



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	0.6	0.2
Nitration	Abs/cm	*ASTM D7624 >20	9.5	11.1	7
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.1	24.8	19.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.1	21.8	15.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.31	8.01	9.59









OIL ANALYSIS REPORT

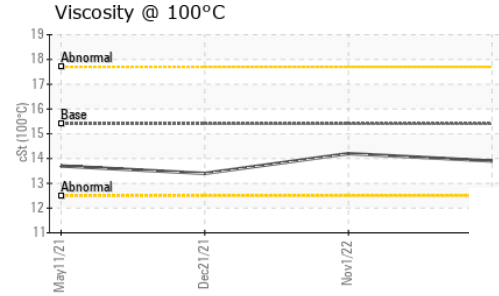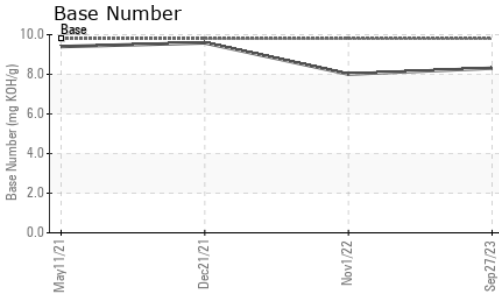

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.2	13.4

GRAPHS

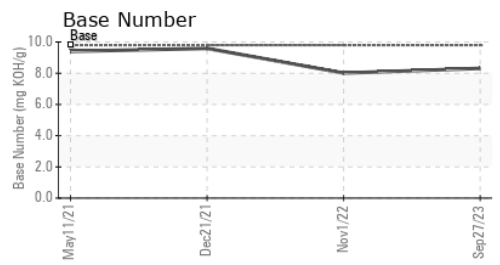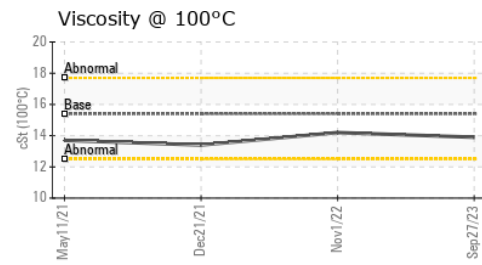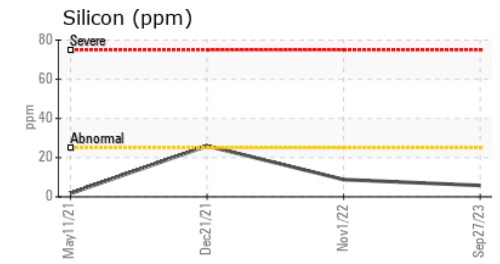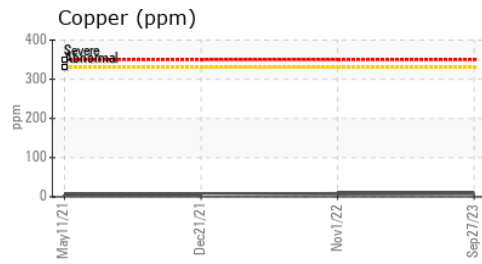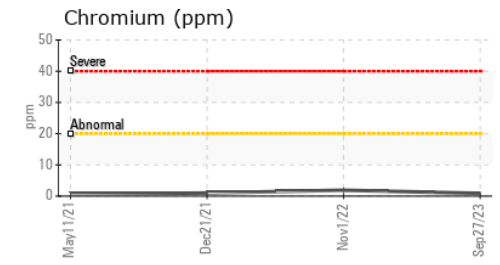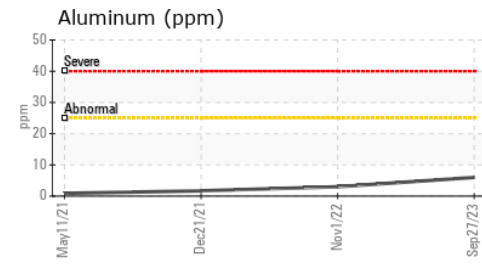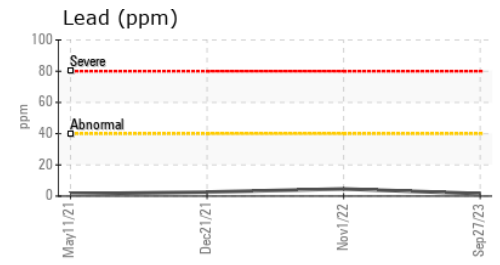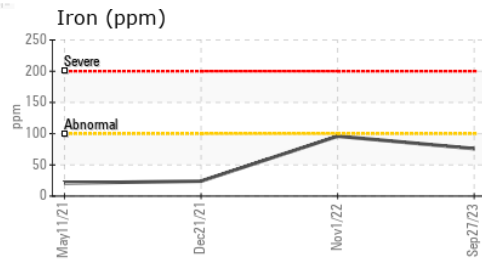

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0104758 **Received** : 29 Sep 2023
Lab Number : 05965545 **Diagnosed** : 02 Oct 2023
Unique Number : 10672096 **Diagnostician** : Wes Davis
Test Package : MOB 2

G LOPES CONSTRUCTION
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: BUTCH MCGRATH
 bmcgrath@glopes.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)