


PROBLEM SUMMARY

Sample Rating Trend




VISCOSITY

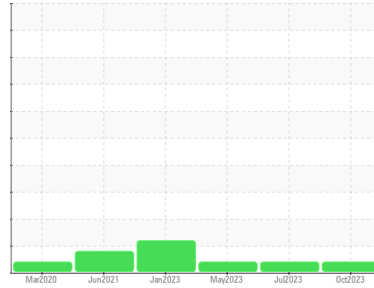

Machine Id
RC-6 (S/N 13241AHRD)
 Component
Reciprocating Compressor
 Fluid
CHEVRON REFRIGERATION OIL WF 68 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 40°C

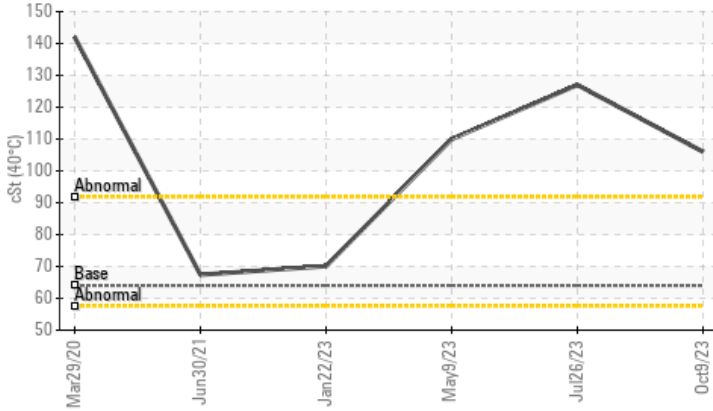

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	ATTENTION	ATTENTION
Visc @ 40°C	cSt	ASTM D445	64.0	▲ 106	▲ 127	▲ 110

Customer Id: KRAWAL
 Sample No.: PCA0106629
 Lab Number: 05978331
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

26 Jul 2023 Diag: Don Baldrige

VISCOSITY



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

view report



09 May 2023 Diag: Jonathan Hester

VISCOSITY



Resample at the next service interval to monitor. All component wear rates are normal. The water content is negligible. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

view report



22 Jan 2023 Diag: Jonathan Hester

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

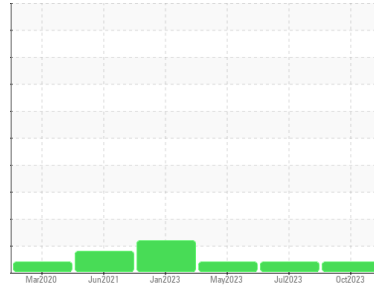

VISCOSITY



Machine Id
RC-6 (S/N 13241AHRD)
 Component
Reciprocating Compressor
 Fluid
CHEVRON REFRIGERATION OIL WF 68 (--- GAL)

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable.

▲ Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	PCA0106629	PCA0101704	PCA0095715	
Sample Date	Client Info	09 Oct 2023	26 Jul 2023	09 May 2023	
Machine Age	hrs	Client Info	31475	30568	29111
Oil Age	hrs	Client Info	3098	2191	733
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd	
Sample Status		ATTENTION	ATTENTION	ATTENTION	

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	0	0
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		1	0	11
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		2	0	13
Calcium	ppm	ASTM D5185m		0	0	13
Phosphorus	ppm	ASTM D5185m		0	0	13
Zinc	ppm	ASTM D5185m		0	0	70
Sulfur	ppm	ASTM D5185m		187	146	150

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.1	0.002	0.00	0.006
ppm Water	ppm	ASTM D6304	>1000	19.2	0.00	67.8






FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>2500	1252	321	1127
Particles >6µm	ASTM D7647	>320	285	104	299
Particles >14µm	ASTM D7647	>40	26	14	21
Particles >21µm	ASTM D7647	>10	9	6	5
Particles >38µm	ASTM D7647	>3	1	0	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>18/15/12	17/15/12	16/14/11	17/15/12

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045		0.014	0.015	0.014


OIL ANALYSIS REPORT

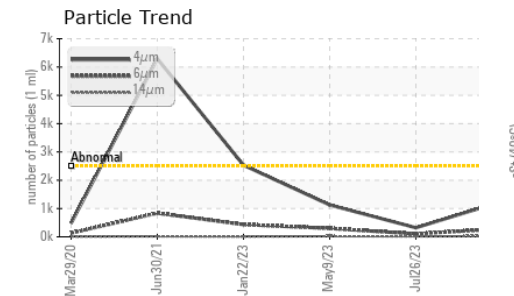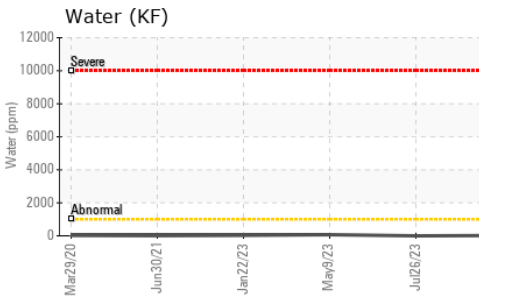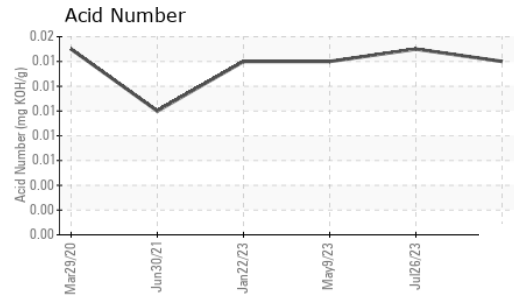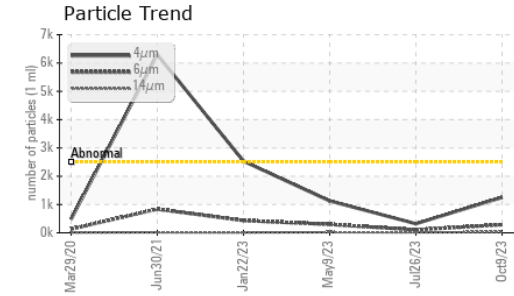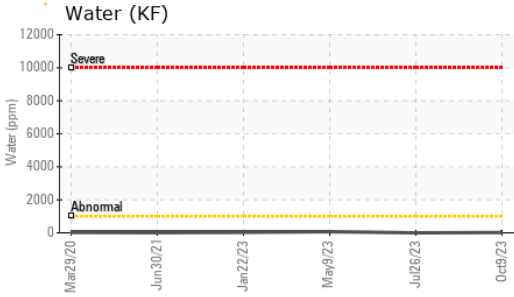






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	64.0 ▲ 106	▲ 127	▲ 110

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

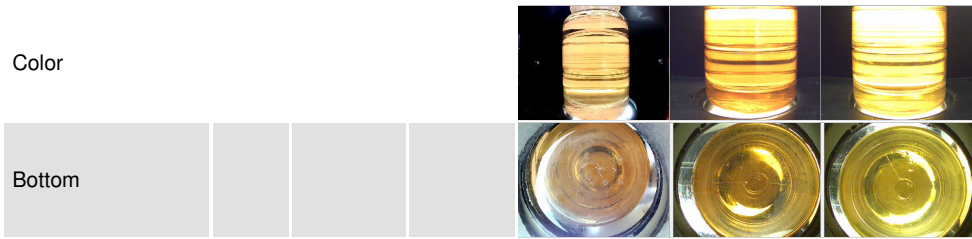

GRAPHS

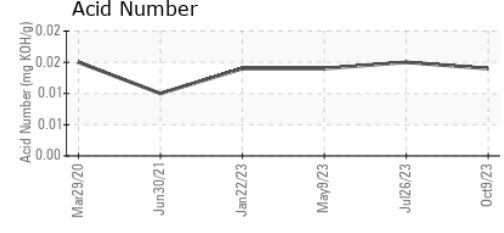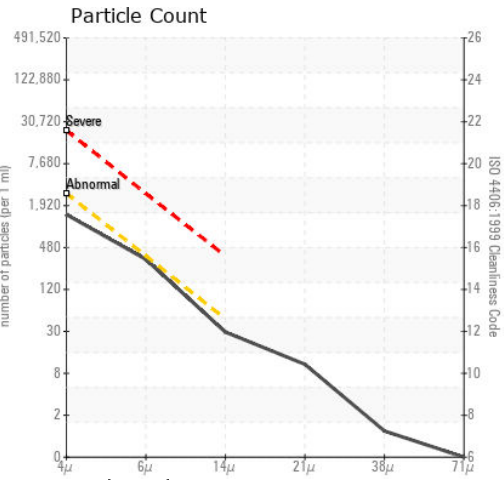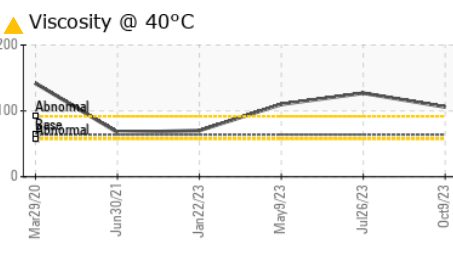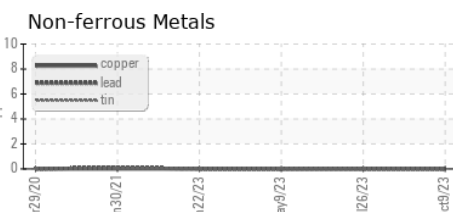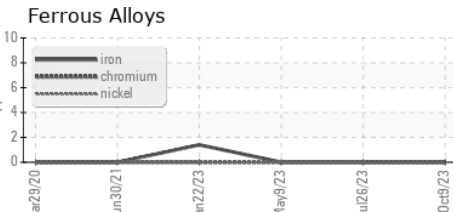

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106629 **Received** : 13 Oct 2023
Lab Number : 05978331 **Diagnosed** : 16 Oct 2023
Unique Number : 10695626 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: KF, PrtCount)

KraftHeinz - Walton - Plant UNK
 261 Delaware St.
 Walton, NY
 US 13856
 Contact: Cindy Scofield
 cindy.scofield@kraft.com
 T: (607)865-2330
 F: (607)865-8863

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)