




# OIL ANALYSIS REPORT

Sample Rating Trend

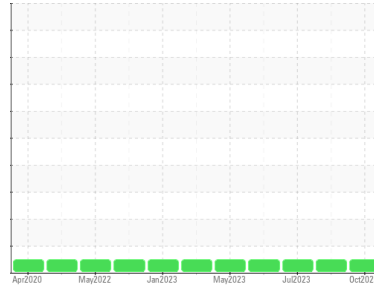

**NORMAL**



Machine Id  
**820015-101299**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0080050</b>	GFL0087080	GFL0087084
Sample Date	Client Info		<b>04 Oct 2023</b>	24 Jul 2023	17 Jul 2023
Machine Age	hrs	Client Info	<b>17808</b>	17463	17435
Oil Age	hrs	Client Info	<b>228</b>	0	0
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>35</b>	23	4
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>26</b>	6	6
Lead	ppm	ASTM D5185m >40	<b>0</b>	2	0
Copper	ppm	ASTM D5185m >330	<b>11</b>	<1	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>8</b>	2	2
Barium	ppm	ASTM D5185m 0	<b>12</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>34</b>	59	59
Manganese	ppm	ASTM D5185m 0	<b>2</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>853</b>	950	974
Calcium	ppm	ASTM D5185m 1070	<b>1148</b>	1036	1060
Phosphorus	ppm	ASTM D5185m 1150	<b>846</b>	1017	1067
Zinc	ppm	ASTM D5185m 1270	<b>1023</b>	1291	1321
Sulfur	ppm	ASTM D5185m 2060	<b>2795</b>	3681	3973

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>20</b>	19	2
Sodium	ppm	ASTM D5185m	<b>3</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>73</b>	8	8

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.7	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.3</b>	9.7	5.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.4</b>	22.3	18.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.3</b>	19.3	14.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.9</b>	8.1	8.7







# OIL ANALYSIS REPORT

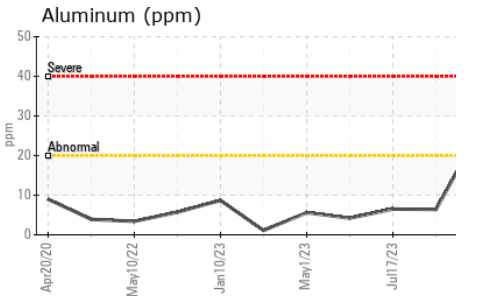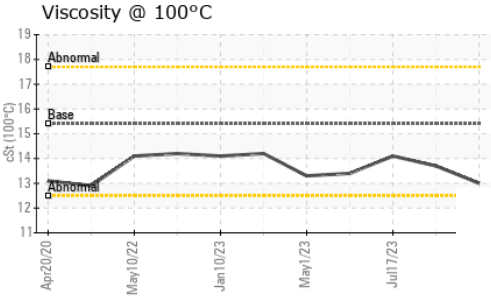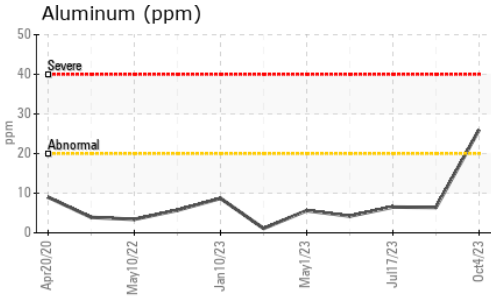

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.0</b>	13.7	14.1

## GRAPHS

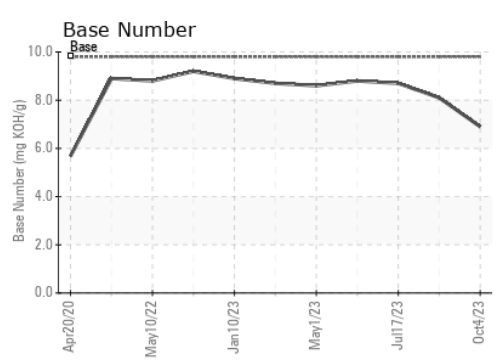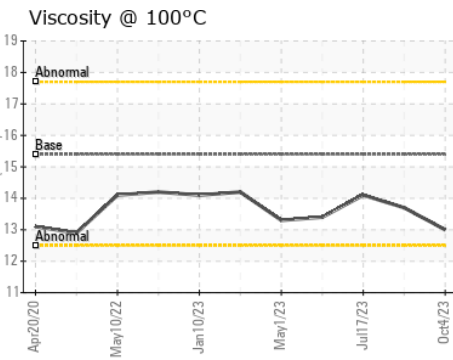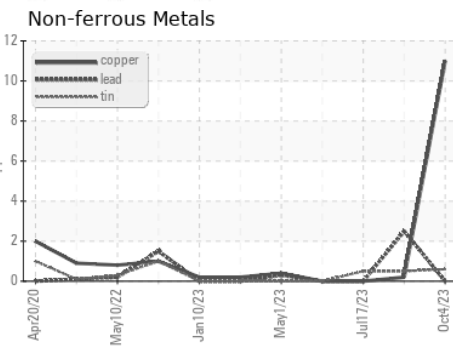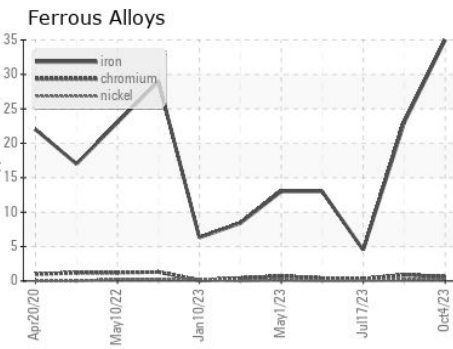

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0080050 **Received** : 13 Oct 2023  
**Lab Number** : **05978767** **Diagnosed** : 16 Oct 2023  
**Unique Number** : 10696062 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 844 - Princeton Hauling**  
 10129 Highway 62 West  
 Princeton, KY  
 US 42445  
 Contact: Kenneth Bigers  
 kbigers@gflenv.com  
 T: (270)970-0371  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)