


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

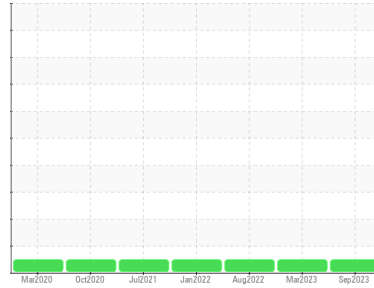

Machine Id
497
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0082903	PCA0069545	PCA0058368
Sample Date	Client Info			26 Sep 2023	31 Mar 2023	17 Aug 2022
Machine Age	hrs	Client Info		0	12555	9569
Oil Age	hrs	Client Info		0	561	9569
Oil Changed	Client Info			Not Chngd	Not Chngd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	29	27	41
Chromium	ppm	ASTM D5185m	>20	2	2	2
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	0	5	8
Lead	ppm	ASTM D5185m	>40	2	1	2
Copper	ppm	ASTM D5185m	>330	1	2	2
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		2	4	8
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		64	61	62
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		891	967	944
Calcium	ppm	ASTM D5185m		1051	1130	1171
Phosphorus	ppm	ASTM D5185m		1021	1030	1043
Zinc	ppm	ASTM D5185m		1187	1250	1261
Sulfur	ppm	ASTM D5185m		2984	3328	3680

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6	6	5
Sodium	ppm	ASTM D5185m		0	2	2
Potassium	ppm	ASTM D5185m	>20	13	13	21

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.1	1.1	1.3
Nitration	Abs/cm	*ASTM D7624	>20	10.9	10.4	12.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5	22.1	24.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.7	18.0	20.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.2	8.3	8.8





OIL ANALYSIS REPORT

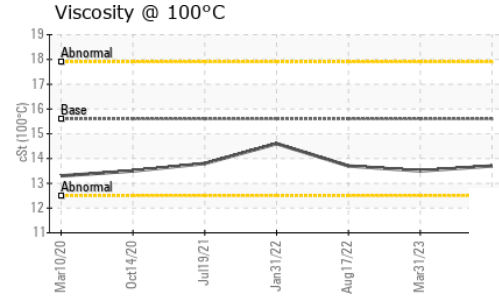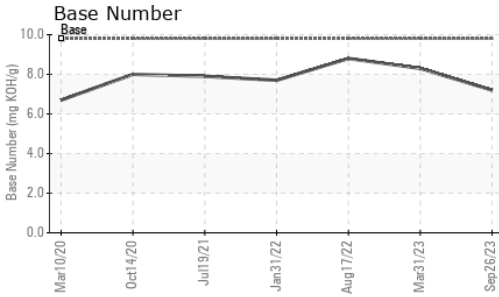

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	13.7	13.5	13.7

GRAPHS

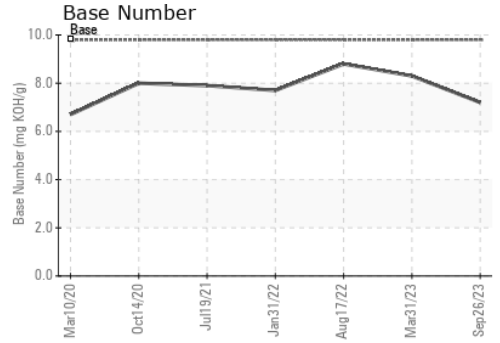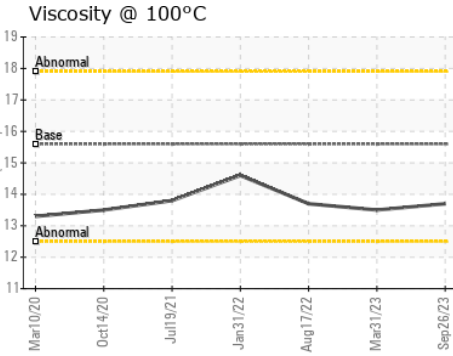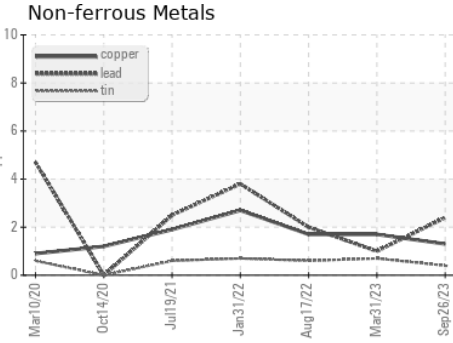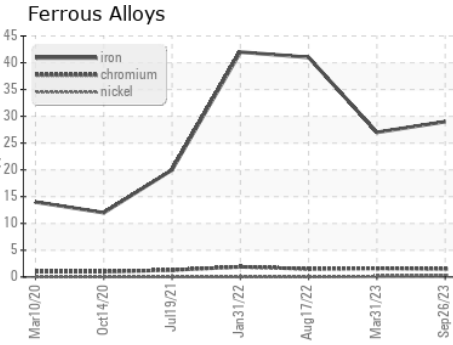

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0082903 **Received** : 16 Oct 2023
Lab Number : **05979429** **Diagnosed** : 17 Oct 2023
Unique Number : 10696724 **Diagnostician** : Wes Davis
Test Package : FLEET

AVR - APPLE VALLEY READY MIX
 14698 GALAXY AVE
 APPLE VALLEY, MN
 US 55124
 Contact: senia zimmer
 avrconcrete.senia@gmail.com
 T: (952)953-2992
 F: (952)953-2994

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)