


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

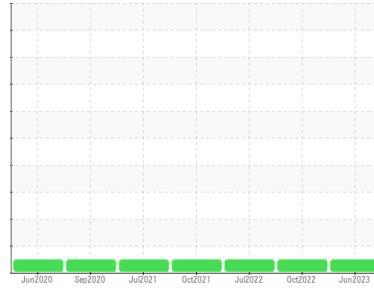

Machine Id
544
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0082812	PCA0069237	PCA0058341
Sample Date	Client Info	14 Jun 2023	17 Oct 2022	29 Jul 2022
Machine Age	hrs Client Info	0	5830	5830
Oil Age	hrs Client Info	540	5322	5322
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	23	13	22
Chromium	ppm ASTM D5185m >20	2	<1	1
Nickel	ppm ASTM D5185m >4	<1	<1	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	0	4	4
Lead	ppm ASTM D5185m >40	2	4	4
Copper	ppm ASTM D5185m >330	<1	<1	1
Tin	ppm ASTM D5185m >15	<1	1	<1
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	2	5	6
Barium	ppm ASTM D5185m	2	0	0
Molybdenum	ppm ASTM D5185m	60	63	63
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m	854	1047	952
Calcium	ppm ASTM D5185m	1027	1288	1150
Phosphorus	ppm ASTM D5185m	964	1065	1015
Zinc	ppm ASTM D5185m	1123	1433	1240
Sulfur	ppm ASTM D5185m	2665	3879	3420

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	8	7	7
Sodium	ppm ASTM D5185m	0	1	3
Potassium	ppm ASTM D5185m >20	4	7	8



INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.3	0.6
Nitration	Abs/cm *ASTM D7624 >20	8.7	8.9	11.5
Sulfation	Abs/.1mm *ASTM D7415 >30	19.6	20.8	23.4

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.2	17.2	20.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.8	7.9	8.2





OIL ANALYSIS REPORT

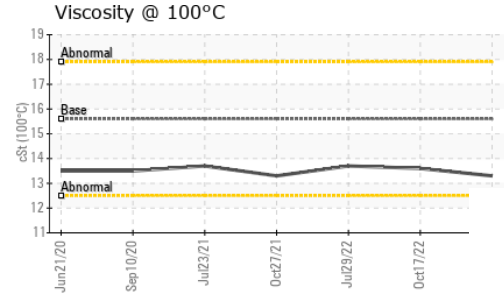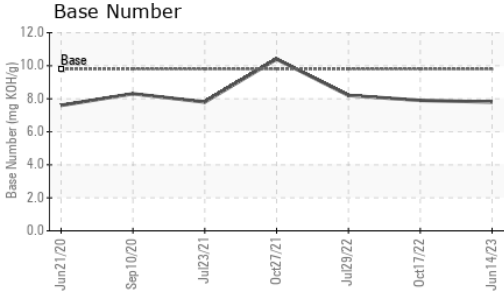

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	13.3	13.6	13.7

GRAPHS

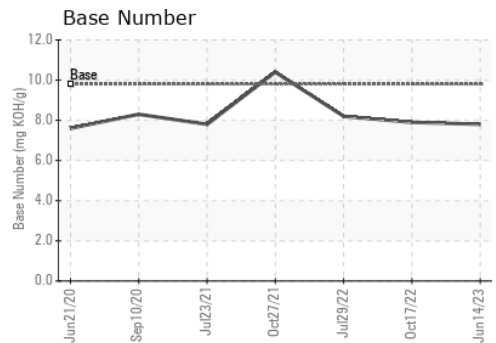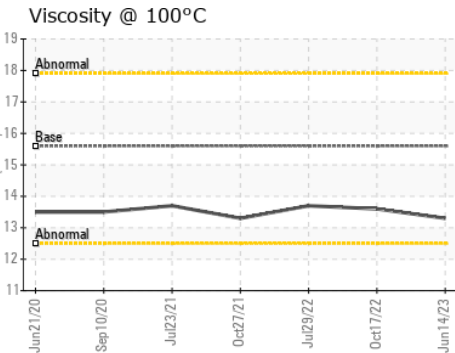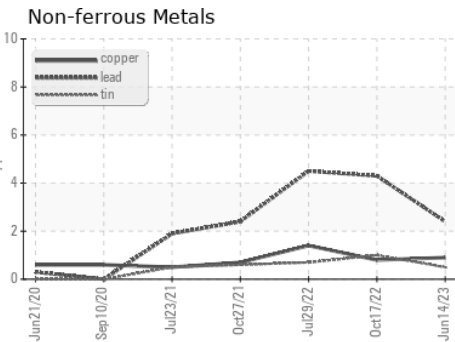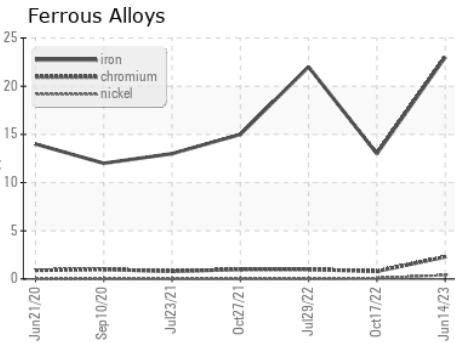

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0082812 **Received** : 16 Oct 2023
Lab Number : 05979458 **Diagnosed** : 17 Oct 2023
Unique Number : 10696753 **Diagnostician** : Wes Davis
Test Package : FLEET

AVR - APPLE VALLEY READY MIX
 14698 GALAXY AVE
 APPLE VALLEY, MN
 US 55124
 Contact: senia zimmer
 avrconcrete.senia@gmail.com
 T: (952)953-2992
 F: (952)953-2994

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)