


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

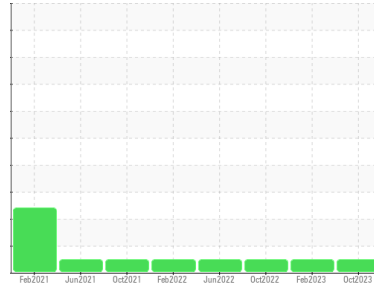

Machine Id  
**310133**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0098943</b>	PCA0089909	PCA0082203
Sample Date	Client Info		<b>10 Oct 2023</b>	08 Feb 2023	29 Oct 2022
Machine Age	mls	Client Info	<b>95050</b>	86738	78224
Oil Age	mls	Client Info	<b>0</b>	0	13629
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>26</b>	9	17
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	4	8
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	2	2
Copper	ppm	ASTM D5185m >330	<b>13</b>	3	6
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>10</b>	5	8
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>61</b>	65	66
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>769</b>	909	912
Calcium	ppm	ASTM D5185m 1050	<b>960</b>	1146	1158
Phosphorus	ppm	ASTM D5185m 995	<b>908</b>	1013	983
Zinc	ppm	ASTM D5185m 1180	<b>1052</b>	1272	1169
Sulfur	ppm	ASTM D5185m 2600	<b>2781</b>	3742	3242

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	3	5
Sodium	ppm	ASTM D5185m	<b>1</b>	4	6
Potassium	ppm	ASTM D5185m >20	<b>5</b>	4	11



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	0.6	1.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.2</b>	9.7	12.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.5</b>	18.5	21.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.0</b>	15.1	19.1
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.8</b>	8.6	8.9









# OIL ANALYSIS REPORT

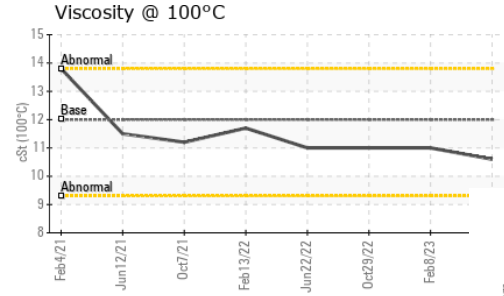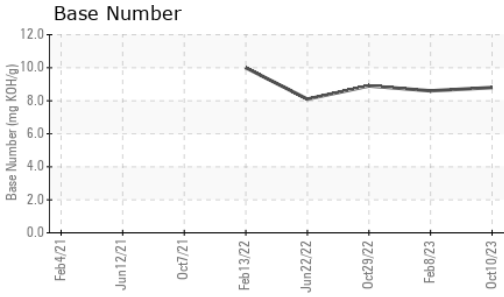

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.6	11.0

## GRAPHS

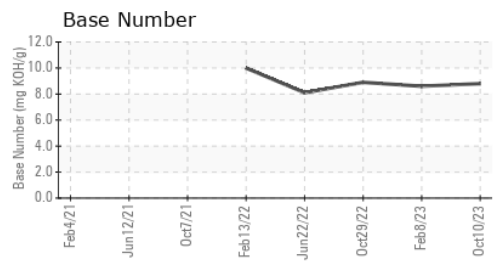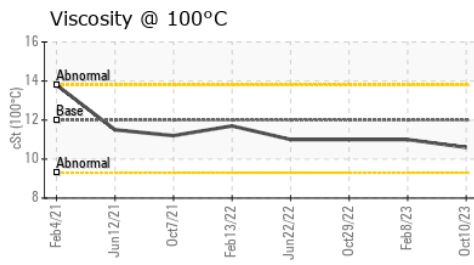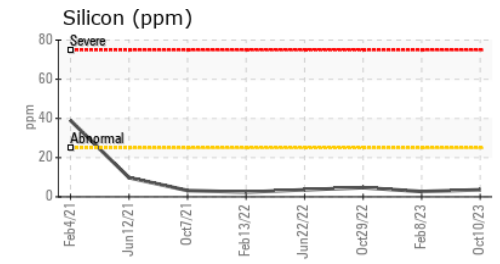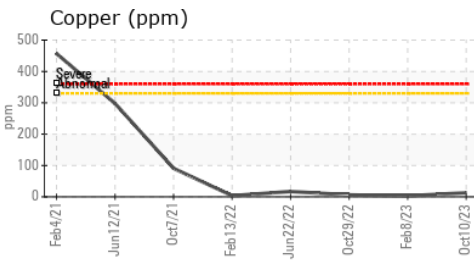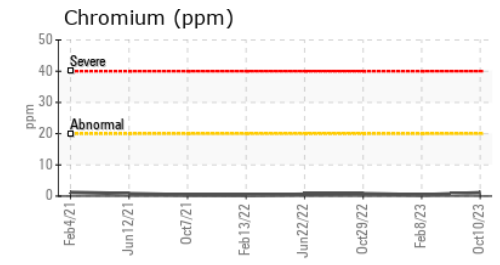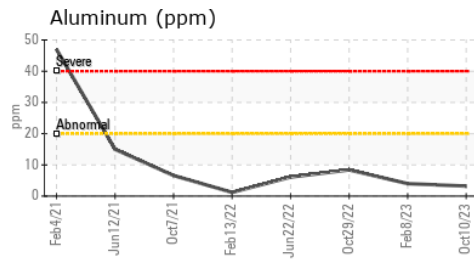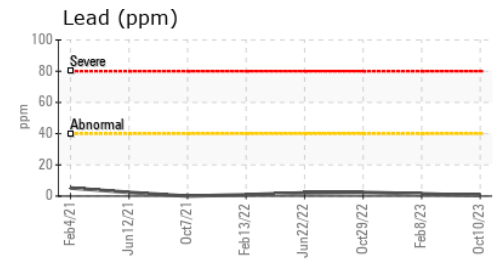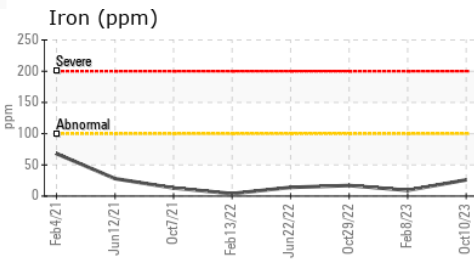

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0098943 **Received** : 17 Oct 2023  
**Lab Number** : 05981035 **Diagnosed** : 17 Oct 2023  
**Unique Number** : 10698330 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #112**  
 1504 MAINLINE DR  
 CINNAMINSON, NJ  
 US 08077  
 Contact: MIKE BOYER  
 mboyer@millertransgroup.com  
 T: (856)662-4264  
 F: (856)663-4898

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)