


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

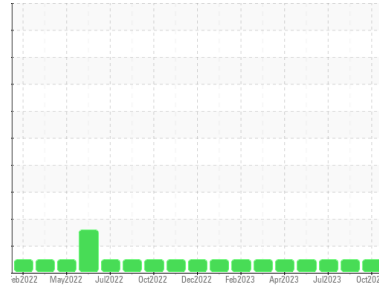

Machine Id  
**20078**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0106032</b>	PCA0095316	PCA0098091
Sample Date	Client Info	<b>23 Oct 2023</b>	01 Sep 2023	13 Jul 2023
Machine Age	hrs	<b>9538</b>	9147	8767
Oil Age	hrs	<b>771</b>	380	357
Oil Changed	Client Info	<b>Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>29</b>	3	5
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	3
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>5</b>	2	3
Lead	ppm ASTM D5185m >40	<b>1</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>3</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	1	2
Barium	ppm ASTM D5185m 0	<b>4</b>	4	0
Molybdenum	ppm ASTM D5185m 60	<b>82</b>	63	62
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>1132</b>	903	932
Calcium	ppm ASTM D5185m 1070	<b>1313</b>	1057	1048
Phosphorus	ppm ASTM D5185m 1150	<b>1209</b>	1024	979
Zinc	ppm ASTM D5185m 1270	<b>1468</b>	1175	1220
Sulfur	ppm ASTM D5185m 2060	<b>3719</b>	3382	3204

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>18</b>	2	8
Sodium	ppm ASTM D5185m	<b>28</b>	2	17
Potassium	ppm ASTM D5185m >20	<b>5</b>	2	2



### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.3</b>	0.3	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>9.6</b>	5.9	6.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.6</b>	18.2	18.4

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.6</b>	13.6	13.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.7</b>	8.6	8.9





# OIL ANALYSIS REPORT

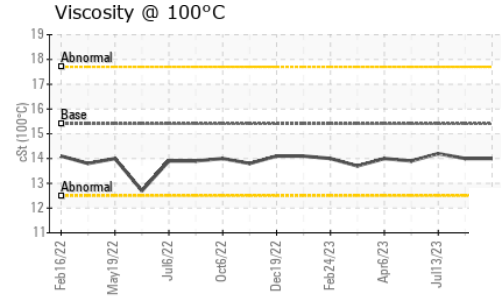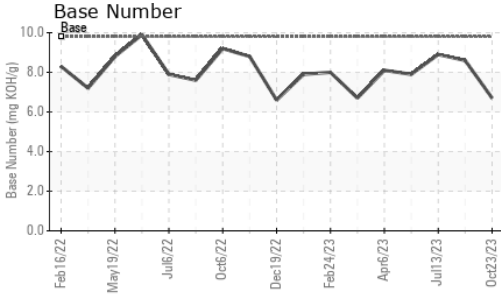

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	14.0	14.2

## GRAPHS

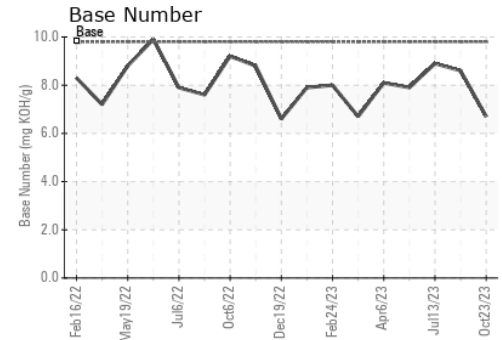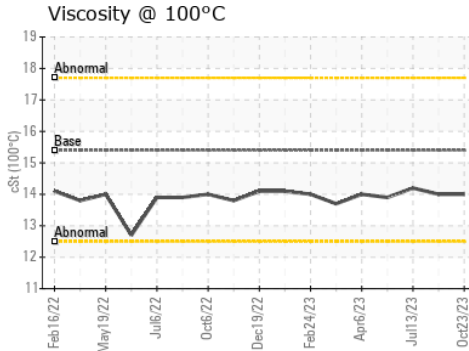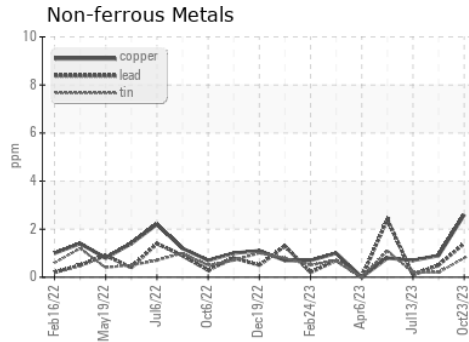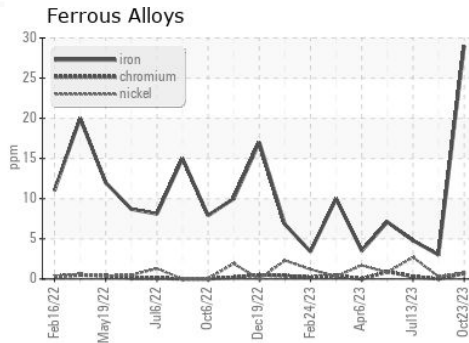

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106032 **Received** : 31 Oct 2023  
**Lab Number** : **05994970** **Diagnosed** : 01 Nov 2023  
**Unique Number** : 10723330 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**LRS - BETHEL HEIGHTS (NWA AR)**  
 848 HWY 264 E  
 BETHEL HEIGHTS, AR  
 US 72764  
 Contact: ROBERT HEATH  
 rheath@lrsrecycles.com  
 T: (479)305-8958  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)