




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
{UNASSIGNED}
Machine Id
2445
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (60 QTS)

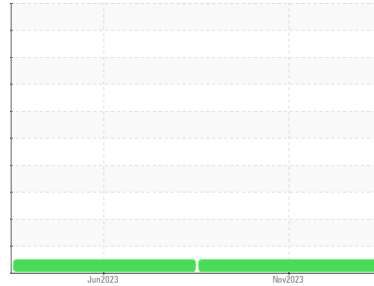

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0092712	GFL0072396	---
Sample Date	Client Info		03 Nov 2023	13 Jun 2023	---
Machine Age	hrs	Client Info	332	32603	---
Oil Age	hrs	Client Info	332	686	---
Oil Changed	Client Info		Not Chngd	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	33	6	---
Chromium	ppm	ASTM D5185m >20	1	<1	---
Nickel	ppm	ASTM D5185m >5	<1	<1	---
Titanium	ppm	ASTM D5185m >2	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >20	5	4	---
Lead	ppm	ASTM D5185m >40	2	1	---
Copper	ppm	ASTM D5185m >330	11	11	---
Tin	ppm	ASTM D5185m >15	1	2	---
Vanadium	ppm	ASTM D5185m	0	<1	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	10	116	---
Barium	ppm	ASTM D5185m 10	0	0	---
Molybdenum	ppm	ASTM D5185m 100	64	78	---
Manganese	ppm	ASTM D5185m	<1	1	---
Magnesium	ppm	ASTM D5185m 450	924	209	---
Calcium	ppm	ASTM D5185m 3000	1219	2006	---
Phosphorus	ppm	ASTM D5185m 1150	1055	1065	---
Zinc	ppm	ASTM D5185m 1350	1332	1298	---
Sulfur	ppm	ASTM D5185m 4250	3136	4684	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	7	---
Sodium	ppm	ASTM D5185m >216	6	14	---
Potassium	ppm	ASTM D5185m >20	12	18	---

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	2.4	0.8	---
Nitration	Abs/cm	*ASTM D7624 >20	9.2	7.0	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.7	19.4	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.8	14.4	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.1	7.7	---







OIL ANALYSIS REPORT

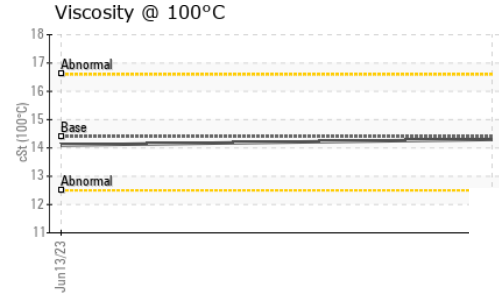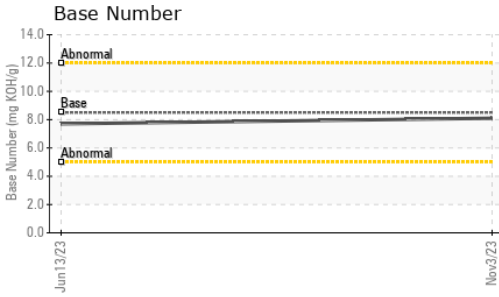

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.3	14.1	---

GRAPHS

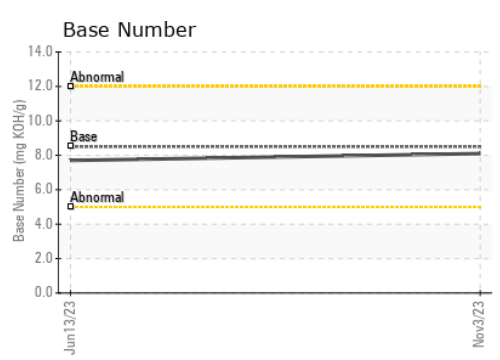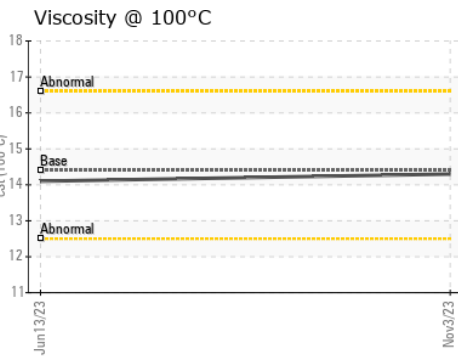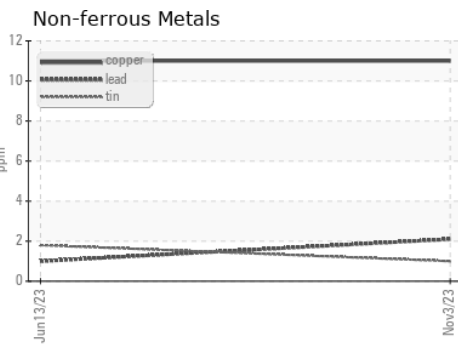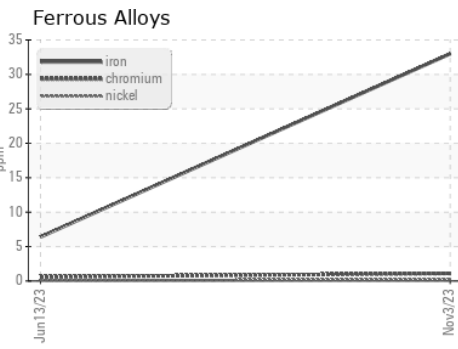

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0092712 **Received** : 06 Nov 2023
Lab Number : **05998822** **Diagnosed** : 07 Nov 2023
Unique Number : 10727182 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 005 - Wilson/Tri-East (CNG)
 2810 Contentnea Road S
 Wilson, NC
 US 27893-8501
 Contact: SPENCER LIGGON
 spencer.liggon@gflenv.com
 T: (800)207-6618
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)