


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

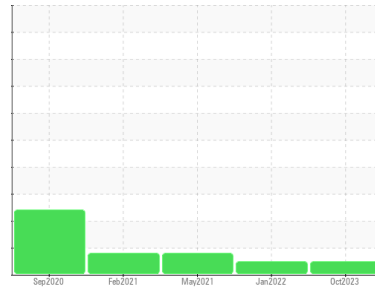

Machine Id  
**2026860**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0108152</b>	PCA0066257	PCA0050304
Sample Date	Client Info		<b>23 Oct 2023</b>	29 Jan 2022	24 May 2021
Machine Age	mls	Client Info	<b>170740</b>	170740	94464
Oil Age	mls	Client Info	<b>94464</b>	76276	0
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>27</b>	19	20
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	2	▲ 6
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	<1	4
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	2	3
Copper	ppm	ASTM D5185m >330	<b>5</b>	17	68
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	2
Antimony	ppm	ASTM D5185m	<b>---</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>2</b>	3	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>58</b>	65	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 950	<b>882</b>	1019	906
Calcium	ppm	ASTM D5185m 1050	<b>1003</b>	1255	1107
Phosphorus	ppm	ASTM D5185m 995	<b>885</b>	1024	898
Zinc	ppm	ASTM D5185m 1180	<b>1182</b>	1247	1197
Sulfur	ppm	ASTM D5185m 2600	<b>2728</b>	2420	2197

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	4
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	8



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.4	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.6</b>	9.9	6.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.9</b>	21.4	19.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.8</b>	17.5	15
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.3</b>	7.0	8.4





# OIL ANALYSIS REPORT

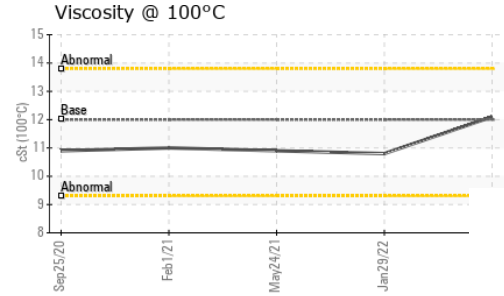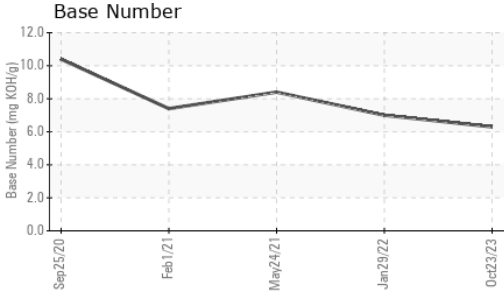

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>12.1</b>	10.8	10.9

## GRAPHS

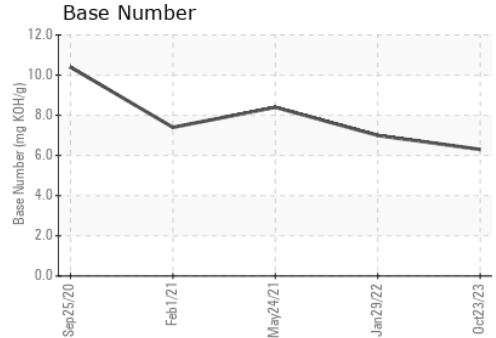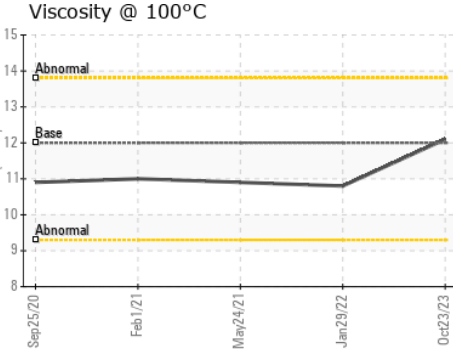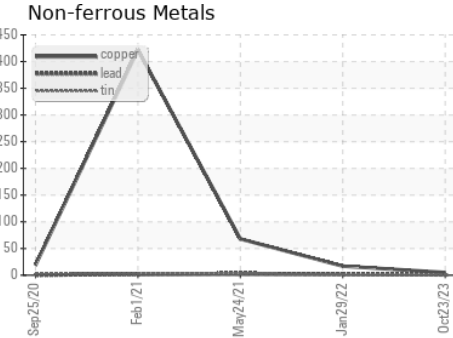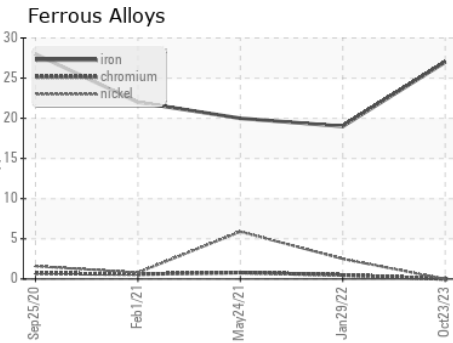

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108152 **Received** : 08 Nov 2023  
**Lab Number** : **06001402** **Diagnosed** : 09 Nov 2023  
**Unique Number** : 10729762 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - DILLON**  
 2047 HWY 9 WEST  
 DILLON, SC  
 US 29536  
 Contact: KEVIN HOOKS  
 kevin.hooks@perdue.com  
 T: (843)841-8069  
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)