

OIL ANALYSIS REPORT

Sample Rating Trend

FUEL

 Machine Id
FLORY 34 SERIES SW-23 (S/N 5758)

 Component
Diesel Engine

 Fluid
 DIESEL ENGINE OIL SAE 15W40 (--- GAL)


DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0107063	---	---
Sample Date	Client Info	17 Oct 2023	---	---
Machine Age	hrs	3984	---	---
Oil Age	hrs	250	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		MARGINAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	27	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >4	0	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	7	---	---
Lead	ppm	ASTM D5185m >40	7	---	---
Copper	ppm	ASTM D5185m >330	0	---	---
Tin	ppm	ASTM D5185m >15	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 250	8	---	---
Barium	ppm	ASTM D5185m 10	0	---	---
Molybdenum	ppm	ASTM D5185m 100	52	---	---
Manganese	ppm	ASTM D5185m	0	---	---
Magnesium	ppm	ASTM D5185m 450	810	---	---
Calcium	ppm	ASTM D5185m 3000	1147	---	---
Phosphorus	ppm	ASTM D5185m 1150	912	---	---
Zinc	ppm	ASTM D5185m 1350	1184	---	---
Sulfur	ppm	ASTM D5185m 4250	2821	---	---

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	7	---	---
Sodium	ppm	ASTM D5185m >158	2	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---
Fuel	%	ASTM D3524 >5	▲ 2.8	---	---




INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624 >20	6.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.2	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	9.83	---	---









OIL ANALYSIS REPORT

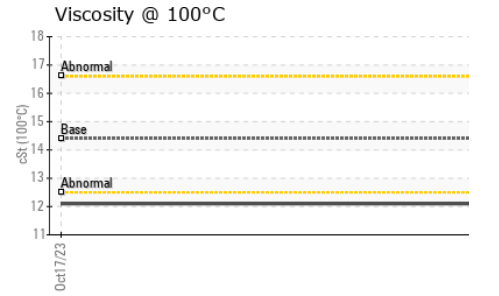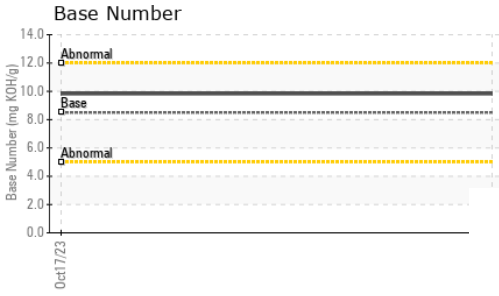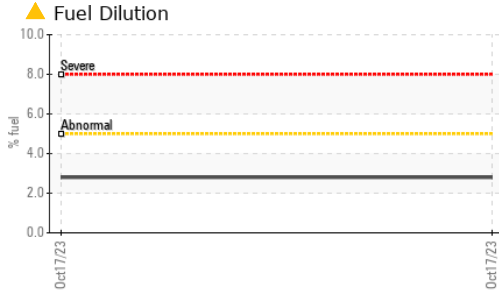

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.1	---

GRAPHS

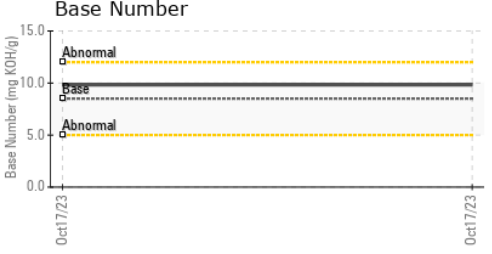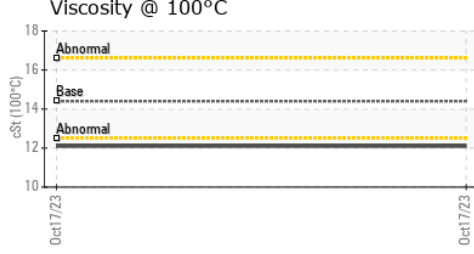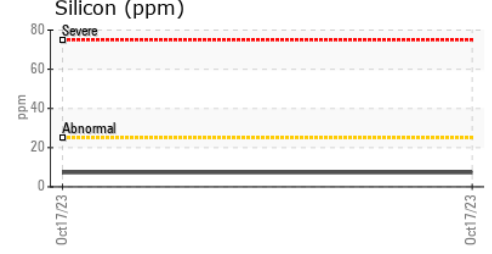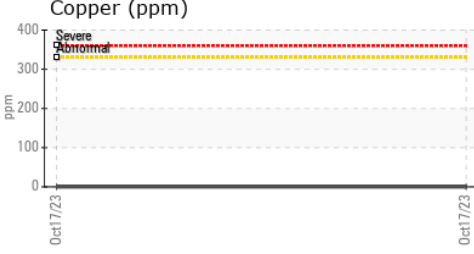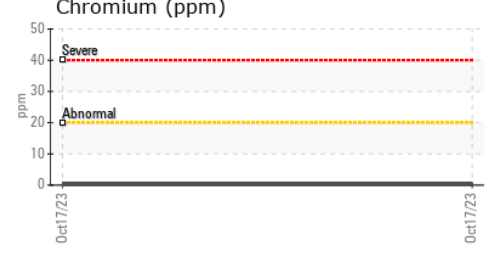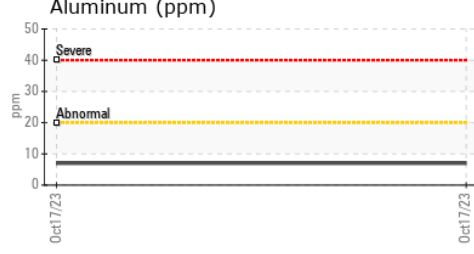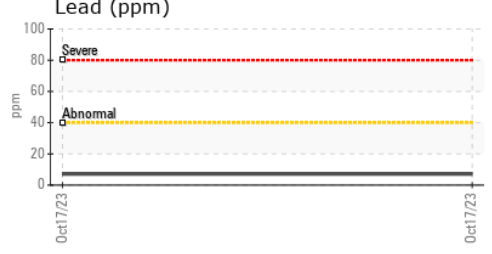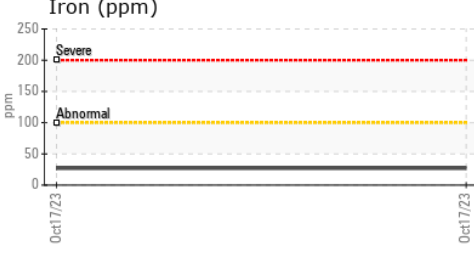

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0107063 **Received** : 08 Nov 2023
Lab Number : **06001754** **Diagnosed** : 09 Nov 2023
Unique Number : 10735516 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

TRINITAS FARMING
 45499 W PANOCHE RD
 FIREBAUGH, CA
 US 93622
 Contact: SPENCER COOPER
 spencer.cooper@trinitasfarming.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)