


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

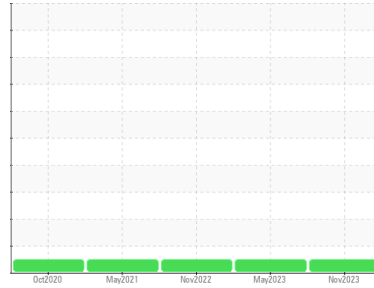

Machine Id  
**1926739**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0108033</b>	PCA0097131	PCA0085158
Sample Date	Client Info		<b>07 Nov 2023</b>	09 May 2023	08 Nov 2022
Machine Age	mls	Client Info	<b>299140</b>	0	225553
Oil Age	mls	Client Info	<b>39000</b>	20000	40000
Oil Changed	Client Info		<b>Changed</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>33</b>	39	28
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	4	4
Lead	ppm	ASTM D5185m >40	<b>1</b>	1	<1
Copper	ppm	ASTM D5185m >330	<b>9</b>	28	10
Tin	ppm	ASTM D5185m >15	<b>1</b>	2	5
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	1	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>56</b>	65	56
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 950	<b>937</b>	977	845
Calcium	ppm	ASTM D5185m 1050	<b>1110</b>	1161	941
Phosphorus	ppm	ASTM D5185m 995	<b>891</b>	940	830
Zinc	ppm	ASTM D5185m 1180	<b>1249</b>	1356	1095
Sulfur	ppm	ASTM D5185m 2600	<b>2542</b>	3376	2451

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	7	8
Sodium	ppm	ASTM D5185m	<b>18</b>	38	8
Potassium	ppm	ASTM D5185m >20	<b>3</b>	8	3



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.5	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.4</b>	10.4	11.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.3</b>	21.3	24.1

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.9</b>	18.0	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.3</b>	6.2	5.7





# OIL ANALYSIS REPORT

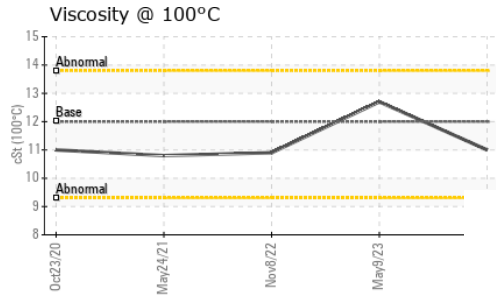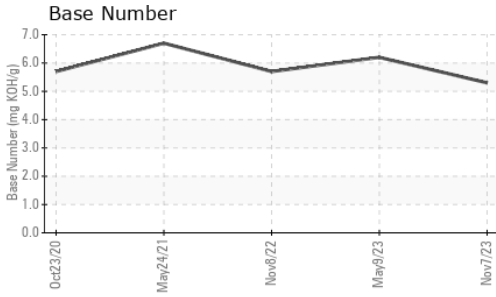

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.0</b>	12.7

## GRAPHS

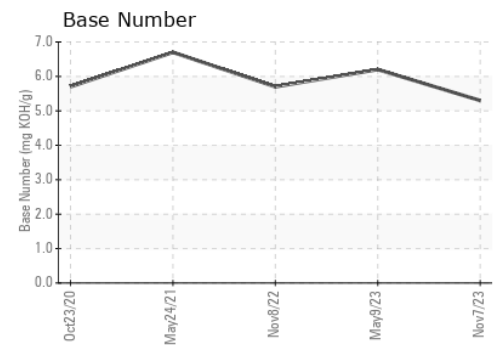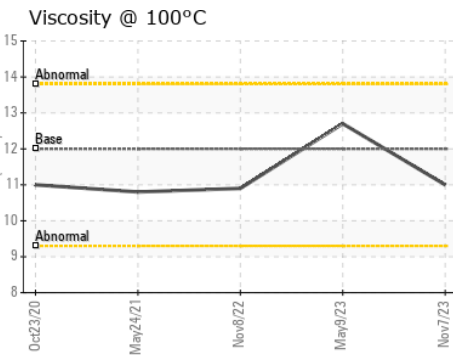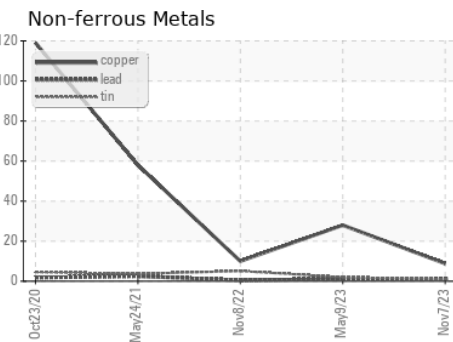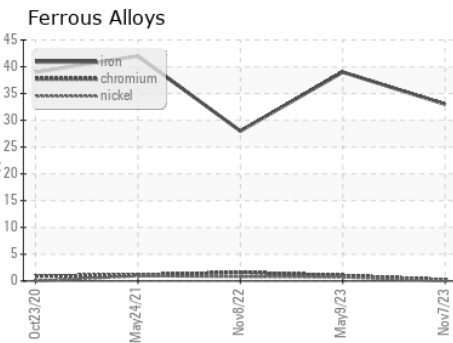

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108033 **Received** : 09 Nov 2023  
**Lab Number** : **06002745** **Diagnosed** : 10 Nov 2023  
**Unique Number** : 10736507 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - Lewiston**  
 210 GRIFFINS QUARTER RD  
 LEWISTON, NC  
 US 27849  
 Contact: NELSON WALLACE  
 nelson.wallace2@perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: