




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

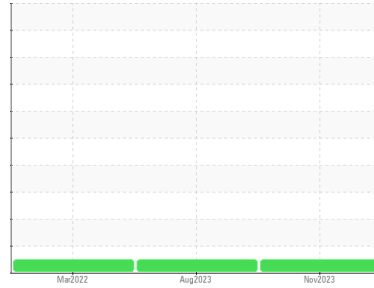

Machine Id
4610M
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (36 QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0059137	GFL0085042	GFL0018428
Sample Date	Client Info		07 Nov 2023	17 Aug 2023	11 Mar 2022
Machine Age	hrs	Client Info	21272	83046	16320
Oil Age	hrs	Client Info	0	66726	0
Oil Changed		Client Info	Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	26	23	10
Chromium	ppm	ASTM D5185m >20	3	<1	<1
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m >2	<1	<1	0
Silver	ppm	ASTM D5185m >2	<1	0	0
Aluminum	ppm	ASTM D5185m >20	32	2	3
Lead	ppm	ASTM D5185m >40	<1	0	<1
Copper	ppm	ASTM D5185m >330	7	2	4
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<1	2	4
Barium	ppm	ASTM D5185m 0	6	0	0
Molybdenum	ppm	ASTM D5185m 60	64	60	59
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	908	964	978
Calcium	ppm	ASTM D5185m 1070	1095	1118	1116
Phosphorus	ppm	ASTM D5185m 1150	1021	1025	1068
Zinc	ppm	ASTM D5185m 1270	1187	1252	1305
Sulfur	ppm	ASTM D5185m 2060	3267	3411	2618

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	11	6	3
Sodium	ppm	ASTM D5185m	42	7	2
Potassium	ppm	ASTM D5185m >20	60	3	2
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.7	0.6	0.2
Nitration	Abs/cm	*ASTM D7624 >20	7.8	10.8	8.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.3	20.8	20.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.6	19.1	17.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.7	7.6	10







OIL ANALYSIS REPORT

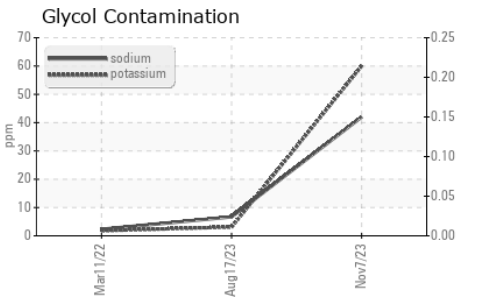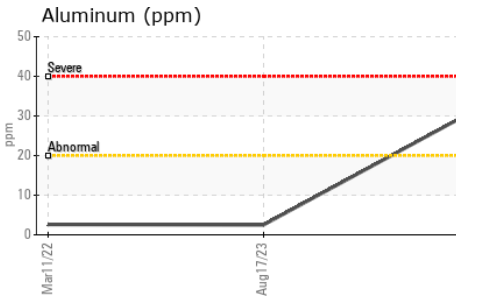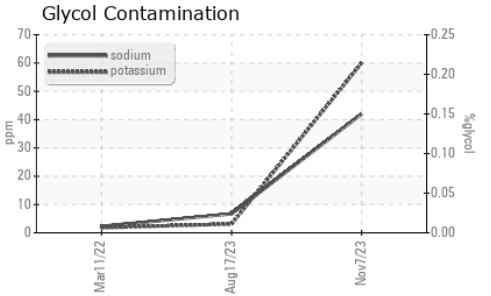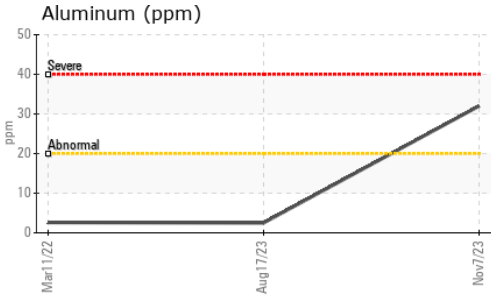

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.6	13.6	13.6

GRAPHS

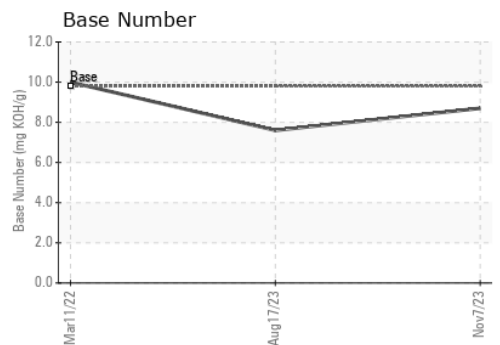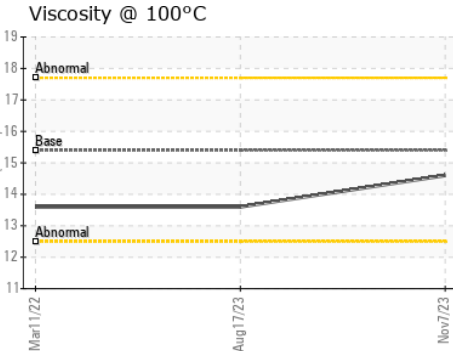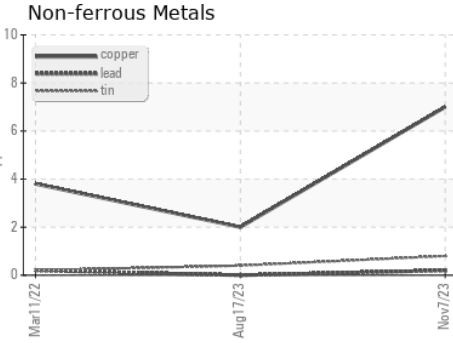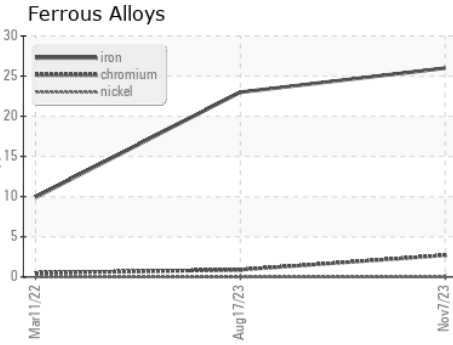

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0059137 **Received** : 14 Nov 2023
Lab Number : 06006706 **Diagnosed** : 16 Nov 2023
Unique Number : 10740468 **Diagnostician** : Sean Felton
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 410 - Michigan West
 39000 Van Born Rd
 Wayne, MI
 US 48184
 Contact: Belal Dgheish
 bdgheish@gflenv.com
 T: (734)714-2340
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)