


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

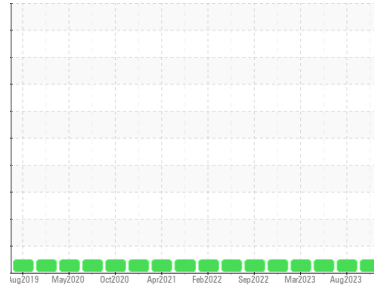

Machine Id  
**1926716**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0105978</b>	PCA0099303	PCA0095983
Sample Date	Client Info		<b>09 Nov 2023</b>	10 Aug 2023	01 Jun 2023
Machine Age	mls	Client Info	<b>390057</b>	372625	352241
Oil Age	mls	Client Info	<b>17432</b>	30422	18936
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>18</b>	36	18
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	4	0
Lead	ppm	ASTM D5185m >40	<b>1</b>	2	1
Copper	ppm	ASTM D5185m >330	<b>6</b>	6	4
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	2	5
Barium	ppm	ASTM D5185m 0	<b>6</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>60</b>	59	57
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>885</b>	956	963
Calcium	ppm	ASTM D5185m 1050	<b>1046</b>	1083	1049
Phosphorus	ppm	ASTM D5185m 995	<b>982</b>	970	1019
Zinc	ppm	ASTM D5185m 1180	<b>1151</b>	1272	1274
Sulfur	ppm	ASTM D5185m 2600	<b>3430</b>	3467	3636

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m	<b>0</b>	13	9
Potassium	ppm	ASTM D5185m >20	<b>3</b>	3	1



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.7	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.8</b>	9.6	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	22.0	20.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.6</b>	18.1	17.2
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.9</b>	6.0	7.4





# OIL ANALYSIS REPORT

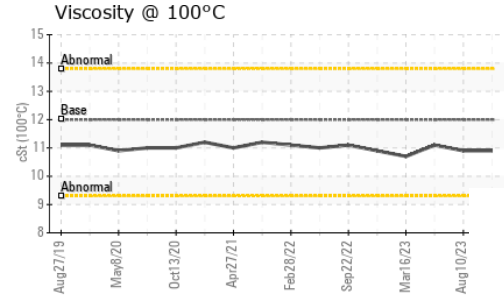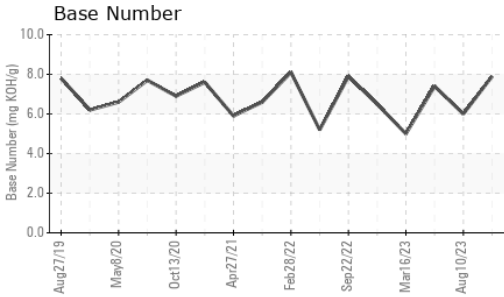

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.9</b>	10.9	11.1

## GRAPHS

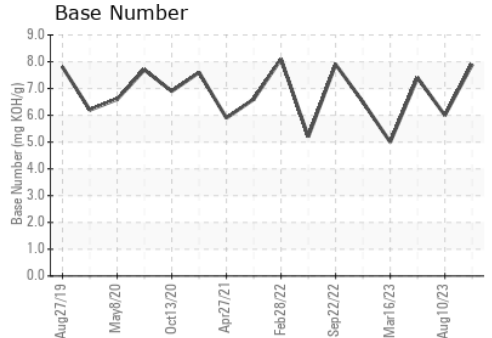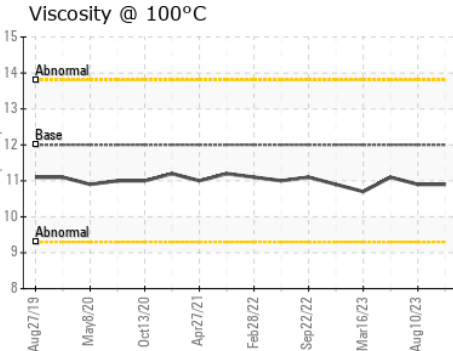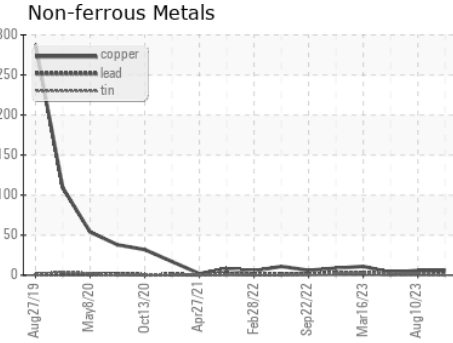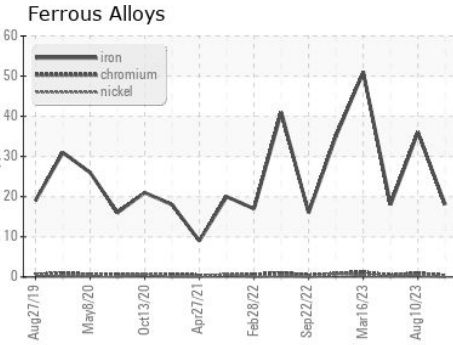

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105978 **Received** : 14 Nov 2023  
**Lab Number** : **06006727** **Diagnosed** : 14 Nov 2023  
**Unique Number** : 10740489 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - ACCOMAC**  
 22520 LANKFORD HWY  
 ACCOMAC, VA  
 US 23301  
 Contact: PEGGY KIMES  
 peggy.kimes@perdue.com  
 T: (757)787-5304  
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)