




PROBLEM SUMMARY

Sample Rating Trend

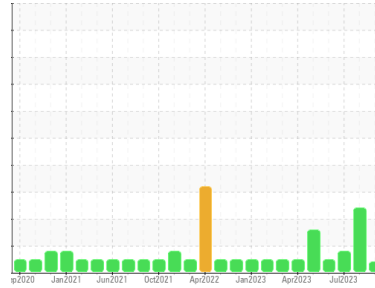


VISCOSITY



Machine Id
526013-7002
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

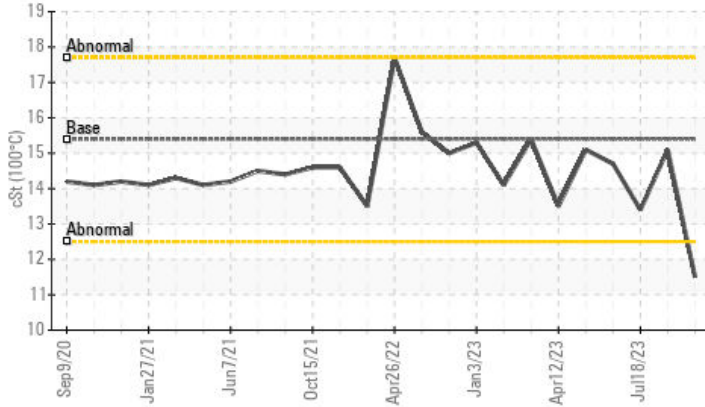

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	ABNORMAL	MARGINAL
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.5	15.1	13.4

Customer Id: GFL657
 Sample No.: GFL0058100
 Lab Number: 06007438
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

08 Aug 2023 Diag: Don Baldrige

WEAR



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. Bearing and/or bushing wear is indicated. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

[view report](#)



18 Jul 2023 Diag: Don Baldrige

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. An increase in the copper level is noted. All other component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



08 Jun 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

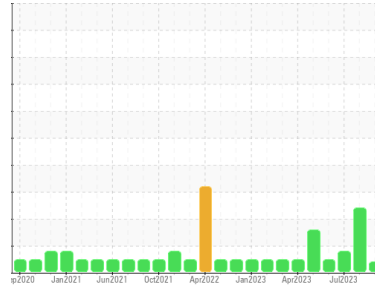

VISCOSITY



Machine Id
526013-7002

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0058100	GFL0086572	GFL0070903
Sample Date	Client Info	13 Nov 2023	08 Aug 2023	18 Jul 2023
Machine Age	hrs	19908	19531	19505
Oil Age	hrs	709	0	306
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		ATTENTION	ABNORMAL	MARGINAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >110	8	63	14
Chromium	ppm	ASTM D5185m >4	<1	<1	0
Nickel	ppm	ASTM D5185m >2	0	2	<1
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	2	▲ 63	<1
Lead	ppm	ASTM D5185m >45	<1	▲ 53	<1
Copper	ppm	ASTM D5185m >85	18	24	▲ 48
Tin	ppm	ASTM D5185m >4	1	▲ 13	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	1	4	6
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	59	67	63
Manganese	ppm	ASTM D5185m 0	<1	1	<1
Magnesium	ppm	ASTM D5185m 1010	1009	1020	955
Calcium	ppm	ASTM D5185m 1070	1055	1255	1142
Phosphorus	ppm	ASTM D5185m 1150	1073	1028	1036
Zinc	ppm	ASTM D5185m 1270	1321	1352	1217
Sulfur	ppm	ASTM D5185m 2060	3206	3776	3609

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >30	28	6	7
Sodium	ppm	ASTM D5185m	10	2	17
Potassium	ppm	ASTM D5185m >20	15	6	0
Fuel	%	ASTM D3524 >5	0.5	<1.0	<1.0

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.2	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	6.8	13.4	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.1	26.2	18.4

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.8	26.8	14.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.4	5.0	8.6







OIL ANALYSIS REPORT

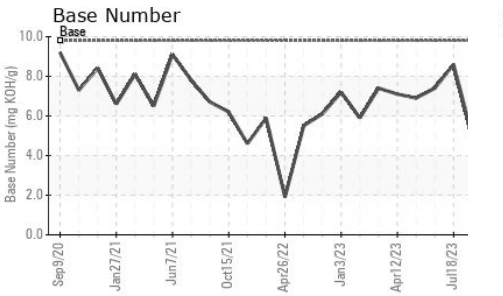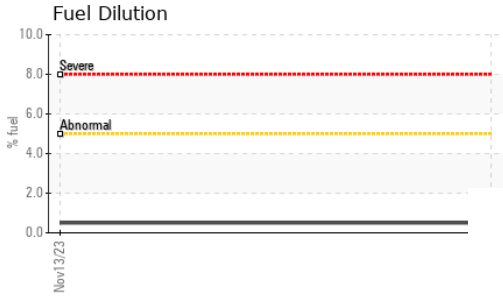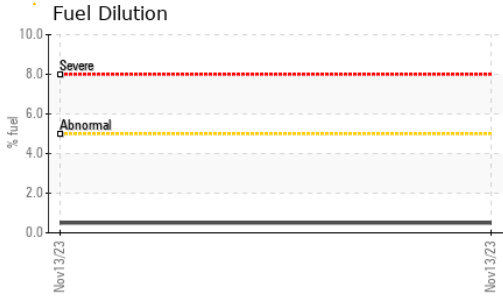

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 11.5	15.1	13.4

GRAPHS

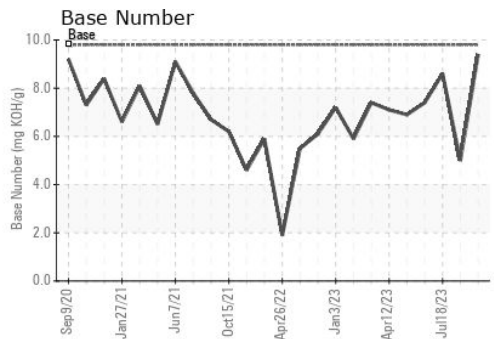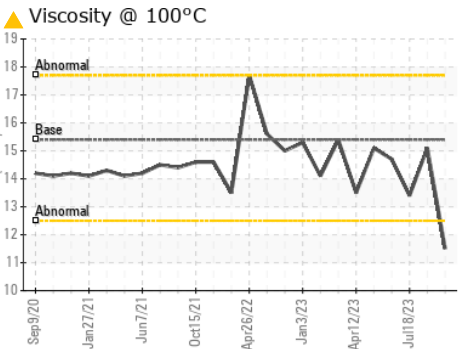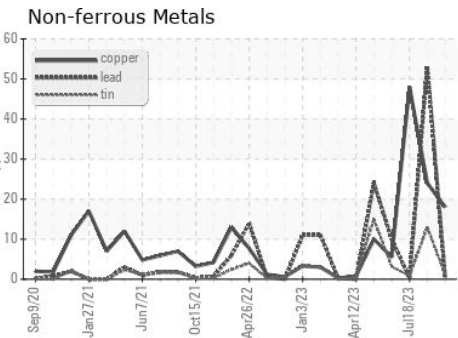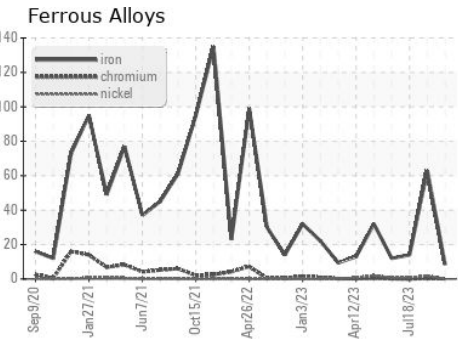

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0058100 **Received** : 14 Nov 2023
Lab Number : 06007438 **Diagnosed** : 16 Nov 2023
Unique Number : 10741200 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 657 - Charlottesville Hauling
 5498 Richmond Road
 Troy, VA
 US 22974
 Contact: Brian Ulickas
 bulickas@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: