

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**RATNER STEEL DRYDENE AW 46**

Component  
**New (Unused) Oil**  
Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

This is a baseline read-out on the submitted sample.

### Contamination

The amount and size of particulates present in the system are acceptable. No other contaminants were detected in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0070719</b>	---	---
Sample Date	Client Info		<b>12 Nov 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	<b>2</b>	---	---
Tin	ppm	ASTM D5185m	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>7</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>4</b>	---	---
Calcium	ppm	ASTM D5185m	<b>22</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>130</b>	---	---
Zinc	ppm	ASTM D5185m	<b>204</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>472</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>12</b>	---	---





## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>4215</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>629</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>18</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>5</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>19/16/11</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.41</b>	---	---

# OIL ANALYSIS REPORT

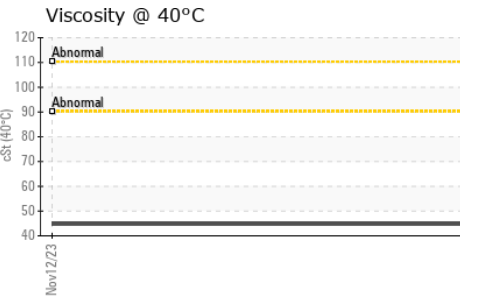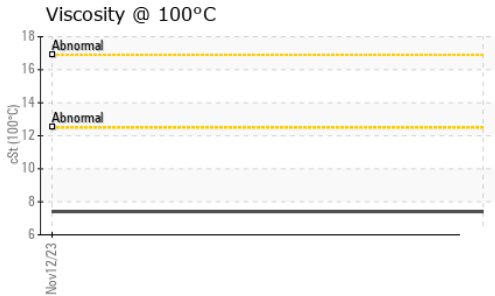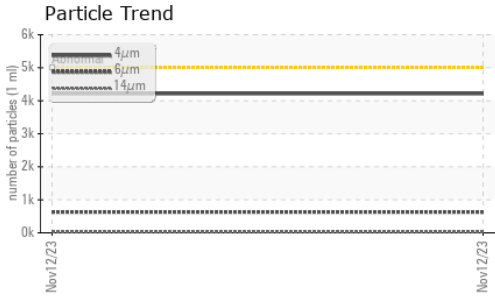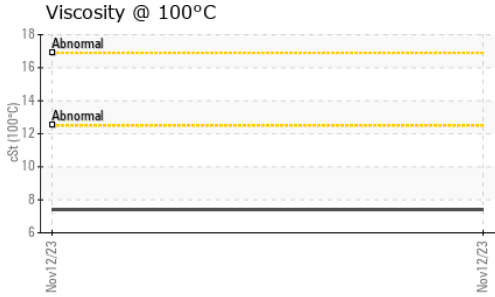




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.74	---	---
Visc @ 100°C	cSt	ASTM D445	7.41	---	---
Viscosity Index (VI)	Scale	ASTM D2270	130	---	---

### SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

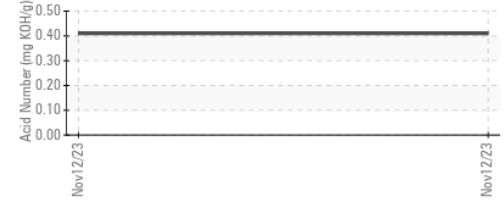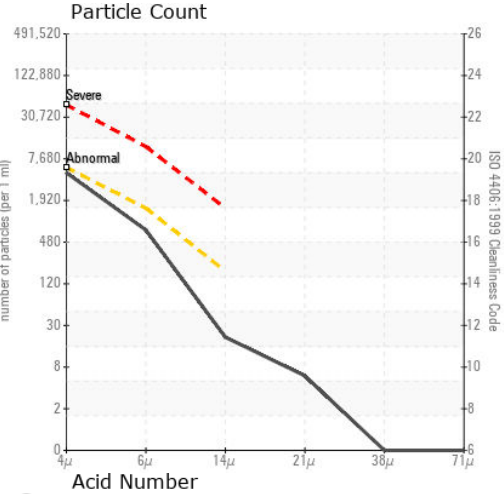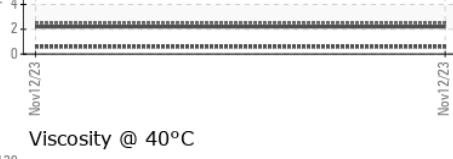

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0070719 **Received** : 15 Nov 2023  
**Lab Number** : 06008751 **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10742513 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**PINKERTON LUBRICANTS**  
 P.O. BOX 947  
 CHESTERTON, IN  
 US 46304  
 Contact: JIM MACK  
 JMACK@PINKERTONLUBRICANTS.COM  
 T: (219)241-3275  
 F: (219)929-4677