




# OIL ANALYSIS REPORT

Sample Rating Trend

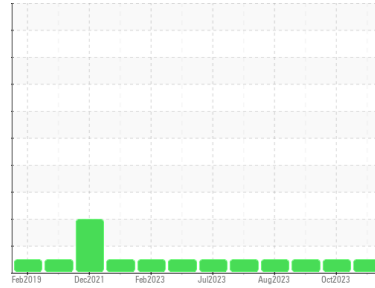

**NORMAL**



Machine Id  
**227055-632109**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0098846</b>	GFL0098807	GFL0090981
Sample Date	Client Info	<b>06 Nov 2023</b>	17 Oct 2023	26 Sep 2023
Machine Age	hrs	<b>6646</b>	6489	6412
Oil Age	hrs	<b>0</b>	20288	20288
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>17</b>	21	15
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>4</b>	4	<1
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	3	1
Tin	ppm ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>2</b>	4	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>57</b>	62	63
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>947</b>	999	1030
Calcium	ppm ASTM D5185m 1070	<b>982</b>	1073	1081
Phosphorus	ppm ASTM D5185m 1150	<b>984</b>	1092	1084
Zinc	ppm ASTM D5185m 1270	<b>1283</b>	1326	1344
Sulfur	ppm ASTM D5185m 2060	<b>2932</b>	3112	3281

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	7	6
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	1	1
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	1	<1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>8.7</b>	8.3	7.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.5</b>	18.5	18.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.5</b>	15.6	14.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.0</b>	8.1	8.9







# OIL ANALYSIS REPORT

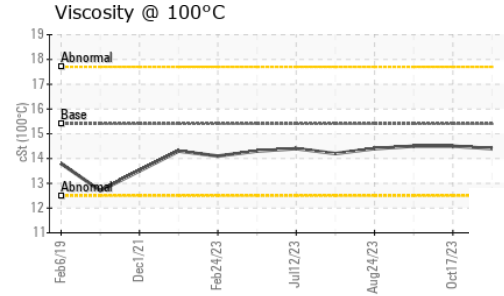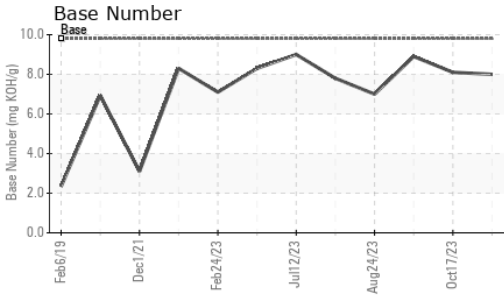

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.5	14.5

## GRAPHS

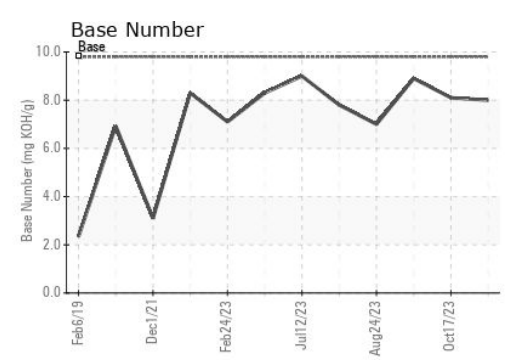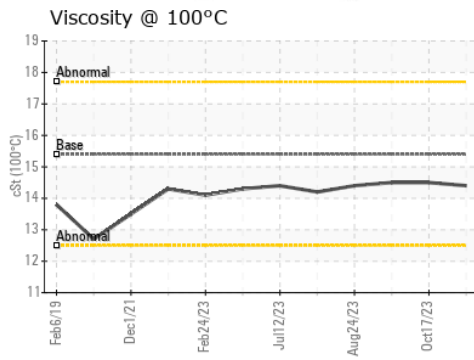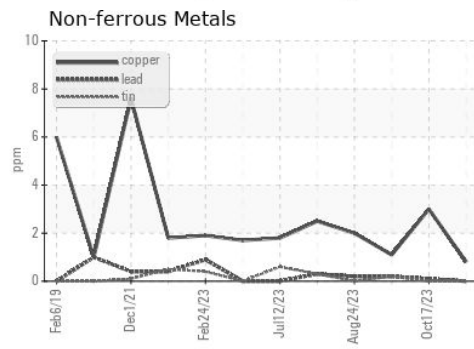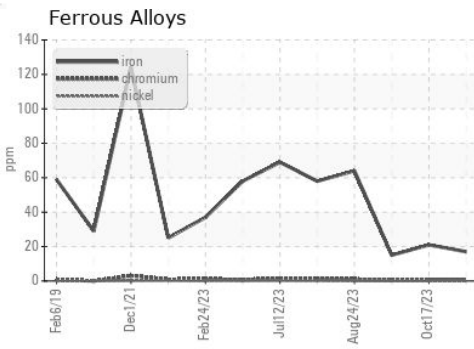

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098846 **Received** : 15 Nov 2023  
**Lab Number** : **06008827** **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10742589 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 814 - Little Rock Hauling**  
 4005 Hwy 161 N.  
 Little Rock, AR  
 US 72117  
 Contact: Brad Manager

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: