


OIL ANALYSIS REPORT

Sample Rating Trend



GLYCOL

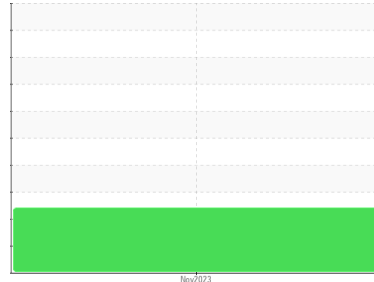

Machine Id
FLORY ST-14 S-23 (S/N 508360)

Component
Diesel Engine

Fluid
PETRO CANADA 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you monitor for possible coolant leak. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0106966	---	---
Sample Date	Client Info			10 Nov 2023	---	---
Machine Age	hrs	Client Info		7020	---	---
Oil Age	hrs	Client Info		250	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				ABNORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>5	<1.0	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	22	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	4	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	17	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		0	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		99	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		1006	---	---
Calcium	ppm	ASTM D5185m		1089	---	---
Phosphorus	ppm	ASTM D5185m		985	---	---
Zinc	ppm	ASTM D5185m		1323	---	---
Sulfur	ppm	ASTM D5185m		3236	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	---	---
Sodium	ppm	ASTM D5185m		▲ 325	---	---
Potassium	ppm	ASTM D5185m	>20	▲ 182	---	---
Glycol	%	*ASTM D2982		NEG	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		11.40	---	---









OIL ANALYSIS REPORT

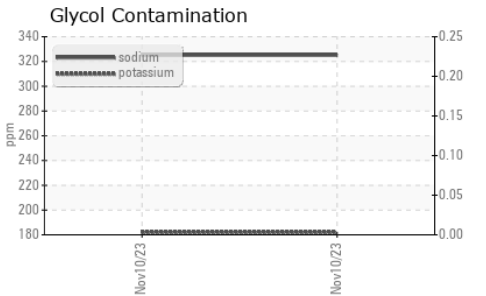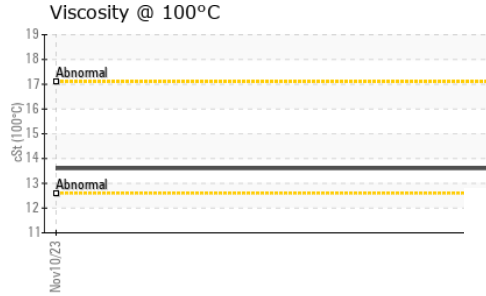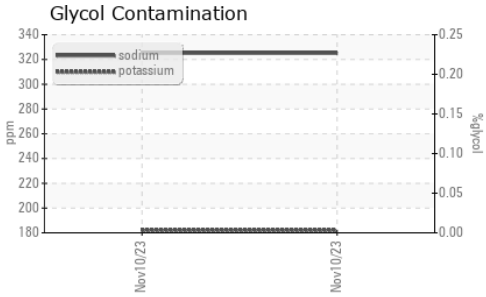

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.6	---	---

GRAPHS

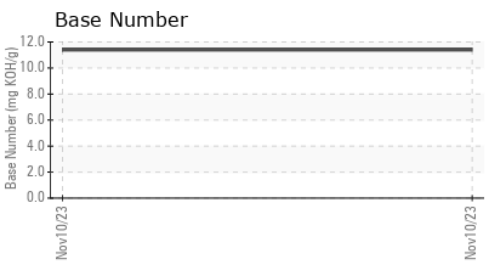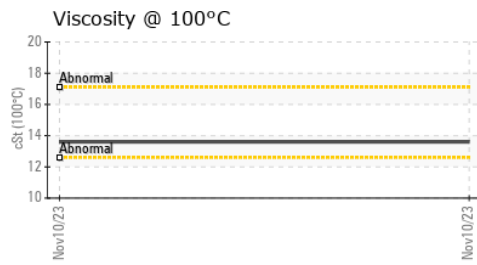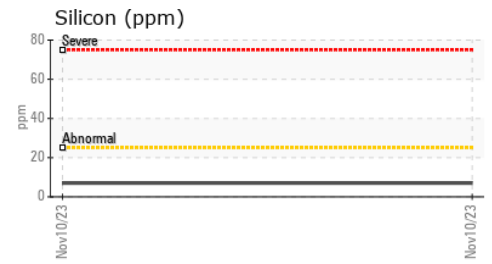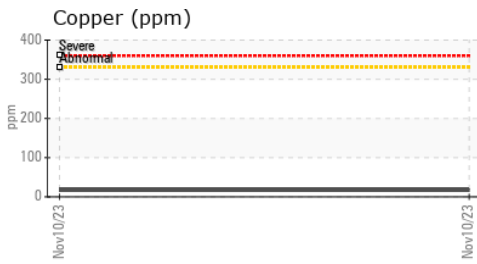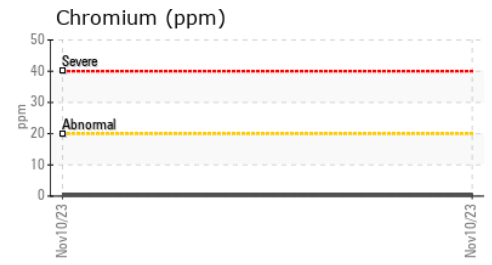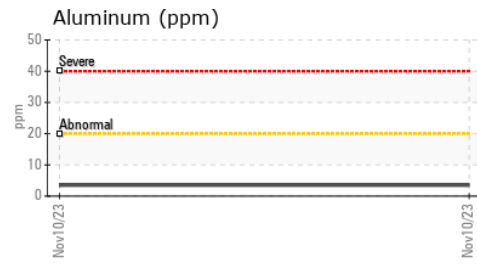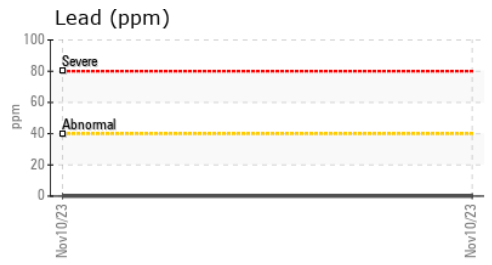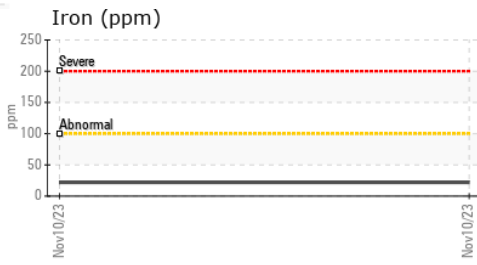

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106966 **Received** : 16 Nov 2023
Lab Number : 06009783 **Diagnosed** : 17 Nov 2023
Unique Number : 10748927 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: Glycol)

TRINITAS FARMING
 45499 W PANOCHE RD
 FIREBAUGH, CA
 US 93622

Contact: SPENCER COOPER
 spencer.cooper@trinitasfarming.com

T: (209)493-2999

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: